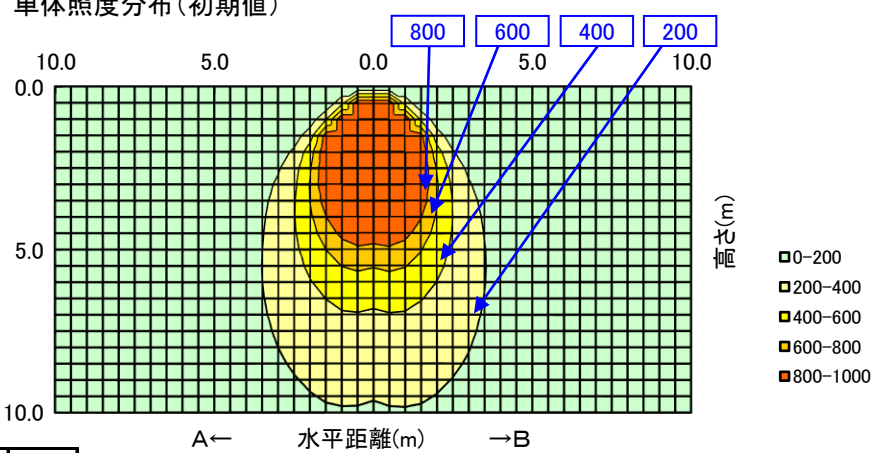


日立照明器具 照明特性

名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%		
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
		床	10%														0%	
形式: WHMTE28BNN-J24A	室指数	固有照明率 S/H=1.0																
<備考>	0.6	0.72	0.63	0.58	0.71	0.63	0.58	0.54	0.62	0.57	0.54	0.61	0.57	0.54	0.52			
	0.8	0.81	0.73	0.68	0.80	0.73	0.68	0.64	0.71	0.67	0.64	0.71	0.66	0.63	0.62			
	1	0.86	0.79	0.74	0.85	0.79	0.74	0.70	0.77	0.73	0.70	0.76	0.73	0.70	0.68			
姿図	1.25	0.90	0.84	0.80	0.89	0.84	0.79	0.76	0.82	0.79	0.76	0.81	0.78	0.75	0.73			
	1.5	0.94	0.88	0.84	0.92	0.88	0.84	0.81	0.86	0.83	0.80	0.85	0.82	0.79	0.78			
	2	0.97	0.93	0.90	0.96	0.92	0.89	0.86	0.91	0.88	0.86	0.89	0.87	0.85	0.83			
	2.5	0.99	0.96	0.93	0.98	0.95	0.92	0.90	0.93	0.91	0.89	0.92	0.90	0.88	0.86			
	3	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.91	0.93	0.91	0.90	0.87			
光源形式	4	1.02	1.00	0.98	1.01	0.99	0.97	0.95	0.97	0.95	0.94	0.95	0.94	0.92	0.90			
	5	1.04	1.02	1.00	1.02	1.01	0.99	0.97	0.99	0.97	0.96	0.97	0.96	0.94	0.92			
器具光束 27,000 lm	7	1.05	1.04	1.03	1.04	1.03	1.02	1.01	1.01	1.00	0.99	0.99	0.98	0.97	0.95			
	10	1.07	1.06	1.05	1.05	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.00	1.00	0.97			
器具効率 Ft= 100%		単体照度分布(初期値)																
上方光束 Fu= 0%																		
下方光束 Fd= 100%																		
最大取付間隔																		
A-A 1.00 H																		
B-B 1.02 H																		
保守率	良	0.83																
	中	0.81																
	否	0.76																
光度 (cd/1000 lm)																		
A-0	B-B															C-0	A'-0	C'-0
0	763															763	763	
10	778	778	787															
20	624	627	623															
30	439	430	445															
40	280	282	287															
50	146	135	135															
60	49	35	38															
70	4	6	4															
80			1															
90																		
100																		
110																		
120																		
130																		
140																		
150																		
160																		
170																		
180																		
		配光曲線 (cd/1000 lm)																
		