

日立照明器具 照明特性

形式: WHNK4121-EU14		天井	80%			70%				50%			30%			0%
<高出力形>		反射率	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		壁	10%													
		床	0%													
		室指数	照明率 S/H=1.0													
姿図 		0.6	0.46	0.35	0.28	0.45	0.35	0.28	0.23	0.33	0.27	0.23	0.32	0.27	0.22	0.20
		0.8	0.54	0.43	0.36	0.53	0.43	0.35	0.30	0.41	0.35	0.30	0.40	0.34	0.30	0.27
		1	0.60	0.49	0.42	0.58	0.48	0.41	0.36	0.47	0.40	0.35	0.45	0.39	0.35	0.33
		1.25	0.65	0.55	0.48	0.63	0.54	0.47	0.42	0.52	0.46	0.41	0.50	0.45	0.41	0.38
		1.5	0.69	0.60	0.53	0.67	0.59	0.52	0.47	0.57	0.51	0.46	0.55	0.50	0.45	0.43
		2	0.74	0.66	0.60	0.72	0.65	0.59	0.54	0.63	0.58	0.53	0.61	0.56	0.52	0.50
		2.5	0.77	0.70	0.65	0.75	0.69	0.64	0.59	0.67	0.62	0.58	0.64	0.60	0.57	0.54
		3	0.79	0.73	0.68	0.78	0.72	0.67	0.63	0.70	0.65	0.62	0.67	0.64	0.60	0.57
		4	0.83	0.78	0.73	0.81	0.76	0.72	0.68	0.74	0.70	0.67	0.71	0.68	0.65	0.62
		5	0.85	0.80	0.76	0.83	0.79	0.75	0.72	0.76	0.73	0.71	0.74	0.71	0.69	0.66
光源																
品名	Hf蛍光ランプ	5	0.85	0.80	0.76	0.83	0.79	0.75	0.72	0.76	0.73	0.71	0.74	0.71	0.69	0.66
形式	FHF32EX-N-H	7	0.87	0.84	0.81	0.86	0.83	0.80	0.77	0.80	0.78	0.75	0.78	0.76	0.74	0.71
光束	4,950 lm	10	0.89	0.87	0.85	0.88	0.85	0.83	0.82	0.83	0.81	0.80	0.81	0.79	0.78	0.74

器具効率 $F_t = 87.0\%$
 上方光束 $F_u = 2.2\%$
 下方光束 $F_d = 84.8\%$

配光分類
BZ-


最大取付間隔
 A-A 1.40 H
 B-B 1.28 H

保守率
 良 0.74
 中 0.70
 否 0.62

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	223	223	223
10	220	219	219
20	209	208	208
30	205	191	193
40	197	168	180
50	183	140	162
60	166	107	139
70	140	72	112
80	118	30	82
90	69	2	45
100	13	0	1
110	1		1
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

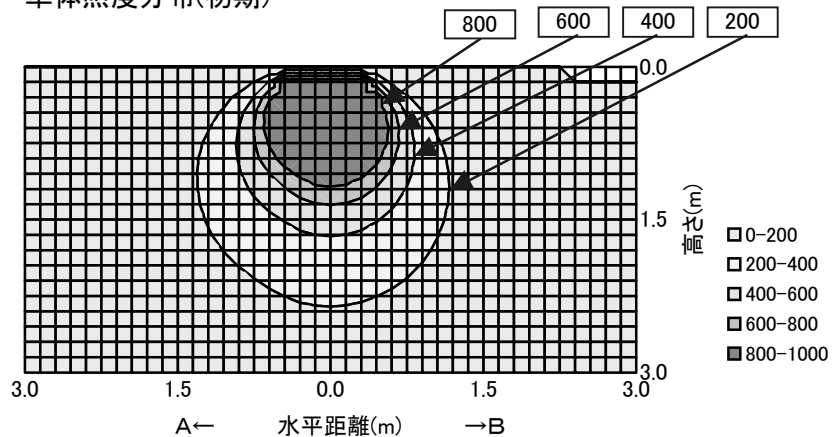

配光曲線

