

日立照明器具 照明特性

形式: WHNM4201A-EN14 ＜定格出力形＞	反射率	天井 壁 床	80%			70%				50%			30%			0%
			70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			10%													0%
			室指数 照明率 S/H=1.0													
姿図 		0.6	0.46	0.34	0.27	0.44	0.33	0.26	0.21	0.31	0.25	0.20	0.29	0.23	0.19	0.16
		0.8	0.54	0.42	0.35	0.51	0.41	0.34	0.29	0.38	0.32	0.27	0.35	0.30	0.26	0.22
		1	0.59	0.48	0.41	0.56	0.47	0.39	0.34	0.43	0.37	0.32	0.40	0.35	0.30	0.26
		1.25	0.64	0.54	0.47	0.61	0.52	0.45	0.40	0.48	0.42	0.38	0.45	0.40	0.35	0.31
		1.5	0.68	0.59	0.52	0.65	0.57	0.50	0.45	0.52	0.47	0.42	0.48	0.44	0.40	0.35
		2	0.73	0.65	0.59	0.70	0.63	0.57	0.52	0.58	0.53	0.49	0.54	0.50	0.46	0.41
		2.5	0.76	0.69	0.63	0.73	0.67	0.61	0.57	0.62	0.57	0.53	0.57	0.54	0.50	0.44
		3	0.79	0.72	0.67	0.76	0.70	0.65	0.60	0.65	0.61	0.57	0.60	0.57	0.53	0.47
光源		4	0.82	0.77	0.72	0.79	0.74	0.70	0.66	0.69	0.65	0.62	0.64	0.61	0.58	0.52
品名	Hf蛍光灯	5	0.84	0.80	0.76	0.81	0.77	0.73	0.70	0.72	0.68	0.66	0.66	0.64	0.62	0.55
形式	FHF32EX-N-H	7	0.87	0.83	0.80	0.83	0.80	0.78	0.75	0.75	0.73	0.70	0.70	0.68	0.66	0.59
光束	7,040 lm	10	0.89	0.86	0.84	0.86	0.83	0.81	0.79	0.78	0.76	0.74	0.73	0.71	0.70	0.63

器具効率 $F_t = 89.8\%$
 上方光束 $F_u = 17.3\%$
 下方光束 $F_d = 72.5\%$

配光分類

BZ-

最大取付間隔

A-A 1.50 H

B-B 1.26 H

保守率


良
中
否

0.74
0.70
0.62

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	176	176	176
10	174	172	173
20	172	162	167
30	170	147	158
40	168	126	149
50	159	100	136
60	150	71	117
70	148	41	102
80	129	14	92
90	83		53
100	75		44
110	64		41
120	62		43
130	57		24
140	31		7
150	7		1
160			
170			
180			

単体照度分布(初期)

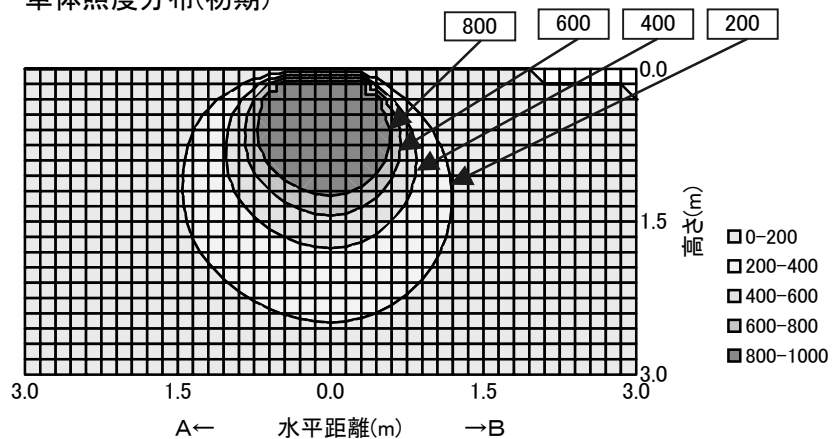

配光曲線

