


日立照明器具 照明特性

形式： WHNP4203-MEU14		天井	80%			70%				50%			30%			0%	
＜高出力形＞		反射率	壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			床	10%													
		室指数	照明率 S/H=1.0														
	0.6	0.40	0.31	0.24	0.39	0.30	0.24	0.20	0.28	0.23	0.19	0.27	0.22	0.19	0.17		
	0.8	0.47	0.38	0.31	0.45	0.37	0.31	0.26	0.35	0.30	0.26	0.33	0.29	0.25	0.23		
	1	0.52	0.43	0.36	0.50	0.42	0.36	0.31	0.40	0.34	0.30	0.38	0.33	0.29	0.27		
	1.25	0.56	0.48	0.42	0.54	0.47	0.41	0.36	0.44	0.39	0.35	0.42	0.38	0.34	0.31		
	1.5	0.60	0.52	0.46	0.58	0.51	0.45	0.41	0.48	0.43	0.39	0.46	0.41	0.38	0.35		
	2	0.64	0.57	0.52	0.62	0.56	0.51	0.47	0.53	0.49	0.45	0.50	0.47	0.44	0.40		
	2.5	0.67	0.61	0.56	0.65	0.59	0.55	0.51	0.56	0.53	0.49	0.54	0.50	0.48	0.44		
	3	0.69	0.63	0.59	0.67	0.62	0.58	0.54	0.59	0.55	0.52	0.56	0.53	0.50	0.47		
光源		4	0.71	0.67	0.63	0.69	0.65	0.62	0.59	0.62	0.59	0.57	0.59	0.57	0.54	0.51	
品名	Hf蛍光ランプ	5	0.73	0.69	0.66	0.71	0.68	0.65	0.62	0.64	0.62	0.60	0.61	0.59	0.57	0.53	
形式	FHF32EX-N-H	7	0.75	0.72	0.70	0.73	0.71	0.68	0.66	0.67	0.65	0.64	0.64	0.63	0.61	0.57	
光束	9,900 lm	10	0.77	0.75	0.73	0.75	0.73	0.71	0.70	0.70	0.68	0.67	0.67	0.66	0.64	0.60	

器具効率 Ft= 75.9%		
上方光束 Fu= 7.4%		
下方光束 Fd= 68.5%		
配光分類		
BZ-		
最大取付間隔		
A-A	1.40	H
B-B	1.28	H
保守率	良	0.69
	中	0.65
	否	0.61
光度 (cd/1000 lm)		
	A-0	B-B C-0
0	182	182 182
10	176	181 182
20	173	171 175
30	168	155 165
40	158	133 150
50	149	105 132
60	137	74 114
70	122	41 94
80	88	13 66
90	67	3 45
100	57	3 34
110	37	2 11
120	5	1 2
130		
140		
150		
160		
170		
180		

単体照度分布(初期)

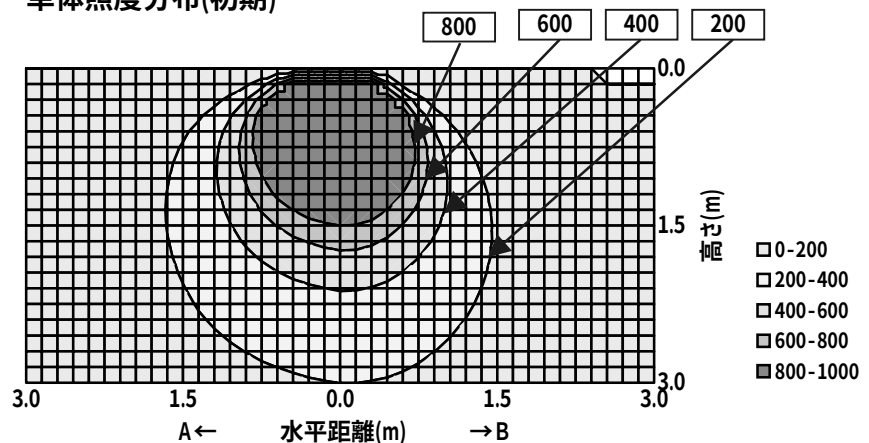

配光曲線

