

日立照明器具 照明特性

形式： WHPK4250A-EN14		反 射 率	天井	80%			70%				50%			30%			0%		
姿図 			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
光源		0.6	0.34	0.26	0.21	0.33	0.26	0.21	0.17	0.25	0.20	0.17	0.24	0.20	0.17	0.16			
		0.8	0.40	0.32	0.27	0.39	0.31	0.26	0.23	0.30	0.26	0.22	0.29	0.25	0.22	0.21			
		1	0.44	0.36	0.31	0.42	0.36	0.31	0.27	0.34	0.30	0.26	0.33	0.29	0.26	0.25			
		1.25	0.47	0.40	0.35	0.46	0.40	0.35	0.31	0.38	0.34	0.31	0.37	0.33	0.30	0.29			
		1.5	0.50	0.44	0.39	0.49	0.43	0.38	0.35	0.42	0.38	0.34	0.40	0.37	0.34	0.32			
品名 Hf蛍光ランプ		2	0.54	0.48	0.44	0.52	0.48	0.43	0.40	0.46	0.42	0.39	0.45	0.41	0.39	0.37			
		2.5	0.56	0.51	0.47	0.55	0.50	0.47	0.44	0.49	0.46	0.43	0.47	0.45	0.42	0.40			
		3	0.58	0.53	0.50	0.56	0.53	0.49	0.46	0.51	0.48	0.45	0.49	0.47	0.45	0.43			
		4	0.60	0.56	0.53	0.59	0.55	0.53	0.50	0.54	0.51	0.49	0.52	0.50	0.48	0.46			
		5	0.61	0.58	0.56	0.60	0.57	0.55	0.53	0.56	0.54	0.52	0.54	0.52	0.51	0.49			
形式 FHF32EX-N-H		7	0.63	0.61	0.59	0.62	0.60	0.58	0.56	0.58	0.57	0.55	0.56	0.55	0.54	0.52			
		10	0.64	0.63	0.61	0.63	0.62	0.60	0.59	0.60	0.59	0.58	0.59	0.58	0.57	0.55			
光束 7,040 lm																			

器具効率 $F_t = 62.2\%$

上方光束 $F_u = 1.1\%$

下方光束 $F_d = 61.1\%$

配光分類

BZ-

最大取付間隔

A-A 1.44 H


B-B 1.24 H

保守率	良	0.73
	中	0.69
	否	0.61

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	167	167	167
10	168	164	166
20	169	154	161
30	162	138	154
40	149	116	138
50	139	91	118
60	133	62	101
70	105	35	87
80	76	12	54
90	33		20
100	8		1
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

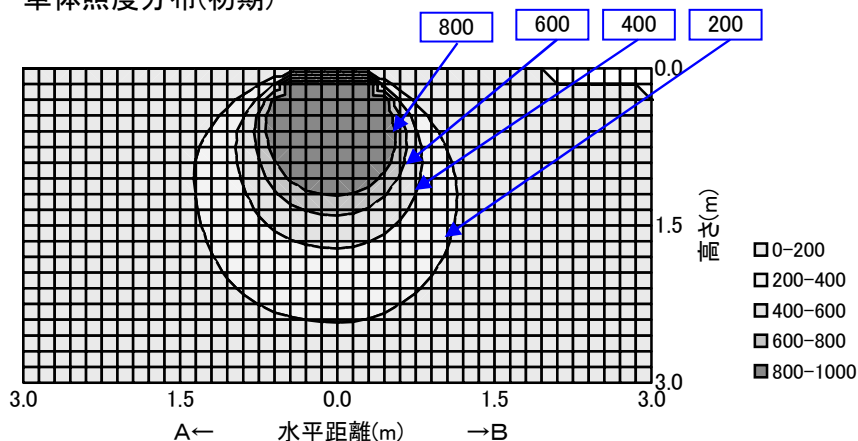

配光曲線

