

日立照明器具 照明特性

形式： WHPM4121-EN14		反 射 率	天井	80%			70%				50%			30%			0%
<定格出力形>			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			床	10%													
			室指数	照明率 S/H=1.0													
姿図 		0.6	0.45	0.33	0.26	0.43	0.32	0.25	0.20	0.29	0.23	0.19	0.27	0.22	0.18	0.15	
		0.8	0.52	0.41	0.33	0.50	0.39	0.32	0.27	0.36	0.30	0.25	0.33	0.28	0.24	0.20	
		1	0.58	0.47	0.39	0.55	0.45	0.38	0.32	0.41	0.35	0.30	0.38	0.33	0.28	0.24	
		1.25	0.63	0.53	0.45	0.60	0.51	0.44	0.38	0.46	0.40	0.36	0.43	0.37	0.33	0.29	
		1.5	0.67	0.57	0.50	0.64	0.55	0.48	0.43	0.51	0.45	0.40	0.46	0.42	0.38	0.32	
		2	0.72	0.64	0.57	0.69	0.61	0.55	0.50	0.56	0.51	0.47	0.52	0.47	0.44	0.38	
		2.5	0.75	0.68	0.62	0.72	0.65	0.60	0.55	0.60	0.55	0.51	0.55	0.51	0.48	0.42	
		3	0.78	0.71	0.65	0.74	0.68	0.63	0.59	0.63	0.59	0.55	0.58	0.54	0.51	0.45	
光源		4	0.81	0.75	0.71	0.78	0.73	0.68	0.64	0.67	0.63	0.60	0.62	0.59	0.56	0.49	
品名	Hf蛍光ランプ	5	0.83	0.78	0.74	0.80	0.75	0.72	0.68	0.70	0.67	0.64	0.64	0.62	0.59	0.52	
形式	FHF32EX-N-H	7	0.86	0.82	0.79	0.82	0.79	0.76	0.73	0.73	0.71	0.68	0.68	0.66	0.64	0.56	
光束	3,520 lm	10	0.88	0.85	0.83	0.85	0.82	0.80	0.78	0.76	0.74	0.73	0.71	0.69	0.68	0.60	

器具効率 Ft= 89.7%
 上方光束 Fu= 19.0%
 下方光束 Fd= 70.7%

配光分類

BZ-

最大取付間隔

A-A 1.60 H


B-B 1.24 H

保守率	良	0.73
	中	0.69
	否	0.61

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	154	154	154
10	157	151	153
20	158	142	150
30	159	128	144
40	160	110	137
50	161	87	128
60	158	61	120
70	150	36	109
80	133	13	90
90	122	1	76
100	123		74
110	95		48
120	59	1	19
130	24		1
140	1		1
150	1		1
160			
170			
180			

単体照度分布(初期)

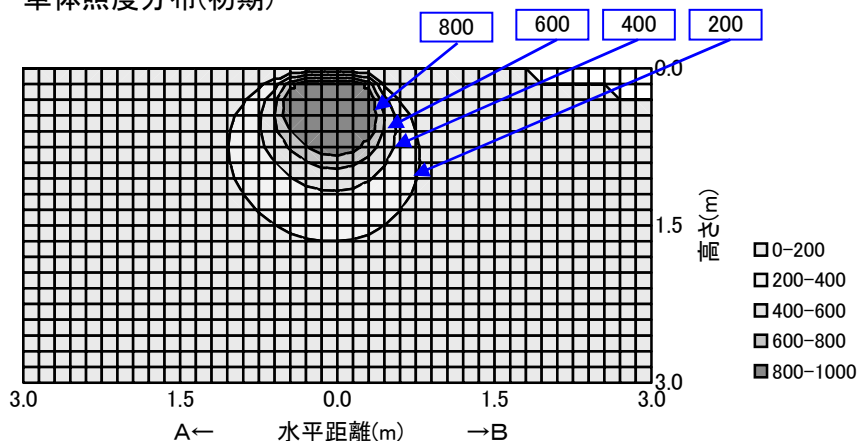

配光曲線

