

日立照明器具 照明特性

形式： WHPM4223A-EU14		反 射 率	天井	80%			70%				50%			30%			0%		
<高出力形>			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
姿図 		0.6	0.46	0.35	0.28	0.44	0.34	0.27	0.22	0.32	0.26	0.22	0.30	0.25	0.21	0.18			
		0.8	0.54	0.43	0.36	0.52	0.42	0.35	0.30	0.40	0.33	0.29	0.37	0.32	0.28	0.25			
		1	0.60	0.49	0.42	0.58	0.48	0.41	0.35	0.45	0.39	0.34	0.42	0.37	0.33	0.30			
		1.25	0.65	0.55	0.48	0.63	0.54	0.47	0.41	0.50	0.45	0.40	0.48	0.42	0.38	0.35			
		1.5	0.69	0.60	0.53	0.66	0.58	0.52	0.47	0.55	0.49	0.45	0.52	0.47	0.43	0.39			
		2	0.74	0.66	0.60	0.72	0.65	0.59	0.54	0.61	0.56	0.52	0.57	0.53	0.50	0.45			
		2.5	0.77	0.71	0.65	0.75	0.69	0.63	0.59	0.65	0.60	0.56	0.61	0.57	0.54	0.49			
		3	0.80	0.74	0.68	0.77	0.72	0.67	0.63	0.67	0.63	0.60	0.64	0.60	0.57	0.52			
光 源		4	0.83	0.78	0.73	0.80	0.76	0.72	0.68	0.71	0.68	0.65	0.67	0.65	0.62	0.57			
品名	Hf蛍光ランプ	5	0.85	0.81	0.77	0.82	0.78	0.75	0.72	0.74	0.71	0.69	0.70	0.68	0.65	0.60			
形式	FHF32EX-N-H	7	0.87	0.84	0.81	0.85	0.82	0.79	0.77	0.78	0.75	0.73	0.73	0.72	0.70	0.64			
光束	9,900 lm	10	0.89	0.87	0.85	0.87	0.85	0.83	0.81	0.80	0.79	0.77	0.76	0.75	0.74	0.68			

器具効率 $F_t = 88.7\%$
 上方光束 $F_u = 11.5\%$
 下方光束 $F_d = 77.2\%$

配光分類

BZ-

最大取付間隔

A-A 1.56 H


B-B 1.24 H

保守率	良	0.73
	中	0.69
	否	0.61

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	192	192	192
10	193	189	190
20	195	175	187
30	195	159	183
40	192	134	173
50	182	107	152
60	169	78	133
70	142	28	113
80	104	21	79
90	66		41
100	76		26
110	65		32
120	48		16
130	27		3
140	8		
150	2		
160			
170			
180			

単体照度分布(初期)

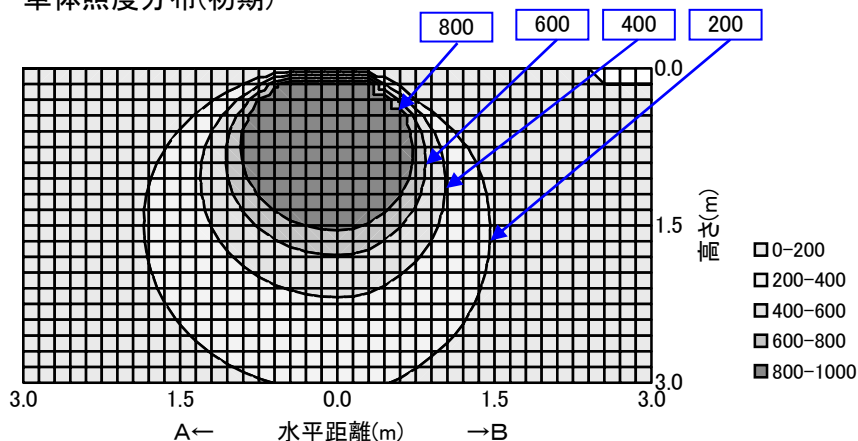

配光曲線

