



日立照明器具 照明特性

形式：WLDE2306WL <電球色(3,000K,Ra85)> <埋込穴Φ150>		反 射 率	天井	80%			70%				50%			30%			0%	
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			床	10%														0%
			室指数	照明率 S/H=1.0														
		0.6	0.67	0.57	0.50	0.66	0.56	0.50	0.46	0.55	0.49	0.45	0.54	0.49	0.45	0.44		
		0.8	0.77	0.68	0.62	0.76	0.67	0.61	0.57	0.66	0.61	0.57	0.65	0.60	0.56	0.55		
		1	0.83	0.75	0.69	0.82	0.74	0.69	0.65	0.73	0.68	0.64	0.72	0.67	0.64	0.62		
		1.25	0.88	0.81	0.76	0.87	0.80	0.75	0.71	0.79	0.74	0.71	0.77	0.74	0.70	0.69		
		1.5	0.92	0.86	0.81	0.91	0.85	0.80	0.77	0.83	0.79	0.76	0.82	0.78	0.76	0.74		
		2	0.96	0.92	0.88	0.95	0.91	0.87	0.84	0.89	0.86	0.83	0.87	0.85	0.82	0.80		
		2.5	0.99	0.95	0.91	0.98	0.94	0.90	0.88	0.92	0.89	0.87	0.90	0.88	0.86	0.83		
		3	1.00	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.86		
光 源		4	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.96	0.94	0.93	0.95	0.93	0.91	0.89		
品名	LED12.3W	5	1.04	1.01	0.99	1.03	1.00	0.98	0.97	0.98	0.97	0.95	0.96	0.95	0.94	0.91		
形式		7	1.06	1.04	1.03	1.05	1.03	1.02	1.00	1.01	1.00	0.99	0.99	0.98	0.97	0.95		
光束	850 lm	10	1.07	1.06	1.05	1.06	1.05	1.04	1.04	1.03	1.02	1.02	1.01	1.01	1.00	0.97		

器具効率 Ft= 100.0%	
上方光束 Fu= 0.0%	
下方光束 Fd= 100.0%	
最大取付間隔	
A-A	1.30 H
B-B	H
保守率	光源寿命 (h)
	40,000 60,000
	良 0.77 0.71
	中 0.73 0.67
	否 0.64 0.59

単体照度分布(初期)

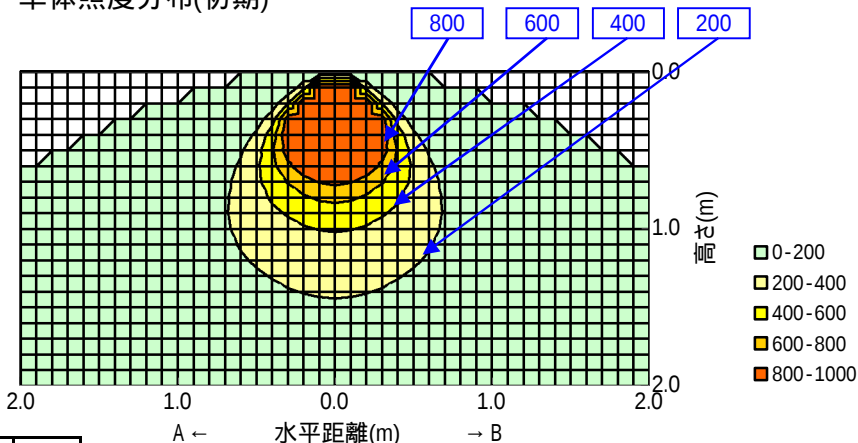

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	488				
10	480				
20	460				
30	429				
40	345				
50	202				
60	73				
70	9				
80	2				
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

配光曲線

