



日立照明器具 照明特性

形式: WLDE2306WN <昼白色(5,000K,Ra75)> <埋込穴Φ150>		天井	80%			70%				50%			30%			0%		
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床		10%														0%
				室指数	照明率 S/H=1.0													

姿図 		0.6	0.67	0.57	0.50	0.66	0.56	0.50	0.46	0.55	0.49	0.45	0.54	0.49	0.45	0.44
		0.8	0.77	0.68	0.62	0.76	0.67	0.61	0.57	0.66	0.61	0.57	0.65	0.60	0.56	0.55
		1	0.83	0.75	0.69	0.82	0.74	0.69	0.65	0.73	0.68	0.64	0.72	0.67	0.64	0.62
		1.25	0.88	0.81	0.76	0.87	0.80	0.75	0.71	0.79	0.74	0.71	0.77	0.74	0.70	0.69
		1.5	0.92	0.86	0.81	0.91	0.85	0.80	0.77	0.83	0.79	0.76	0.82	0.78	0.76	0.74
		2	0.96	0.92	0.88	0.95	0.91	0.87	0.84	0.89	0.86	0.83	0.87	0.85	0.82	0.80
		2.5	0.99	0.95	0.91	0.98	0.94	0.90	0.88	0.92	0.89	0.87	0.90	0.88	0.86	0.83
		3	1.00	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.86
		4	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.96	0.94	0.93	0.95	0.93	0.91	0.89
		5	1.04	1.01	0.99	1.03	1.00	0.98	0.97	0.98	0.97	0.95	0.96	0.95	0.94	0.91
品名	LED12.3W	7	1.06	1.04	1.03	1.05	1.03	1.02	1.00	1.01	1.00	0.99	0.99	0.98	0.97	0.95
形式		10	1.07	1.06	1.05	1.06	1.05	1.04	1.04	1.03	1.02	1.02	1.01	1.01	1.00	0.97
光束	1,120 lm															

器具効率 Ft= 100.0%					
上方光束 Fu= 0.0%					
下方光束 Fd= 100.0%					
最大取付間隔					
A-A	1.30 H				
B-B	H				
保守率	光源寿命 (h)				
	40,000	60,000			
	良	0.77 0.71			
	中	0.73 0.67			
否	0.64 0.59				
光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	488				
10	480				
20	460				
30	429				
40	345				
50	202				
60	73				
70	9				
80	2				
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

单体照度分布(初期)

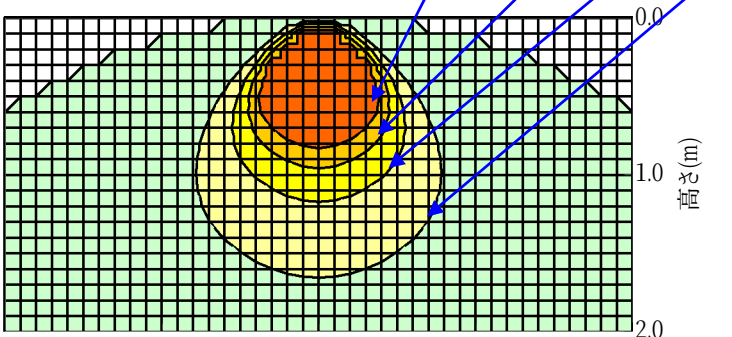

800

600

400

200

0.0
1.0
2.0

高さ(m)

2.0 1.0 0.0 1.0 2.0

A← 水平距離(m) →B

0-200


200-400

400-600

600-800

800-1000

配光曲線

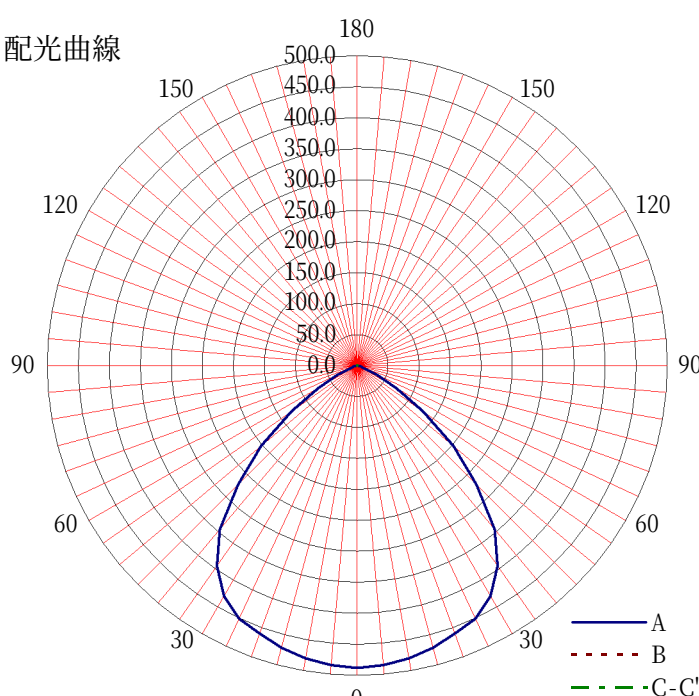

180
150
120
90
60
30
0

500.0
450.0
400.0
350.0
300.0
250.0
200.0
150.0
100.0
50.0
0.0

0
30
60
90
120
150
180

A

B

C-C'