
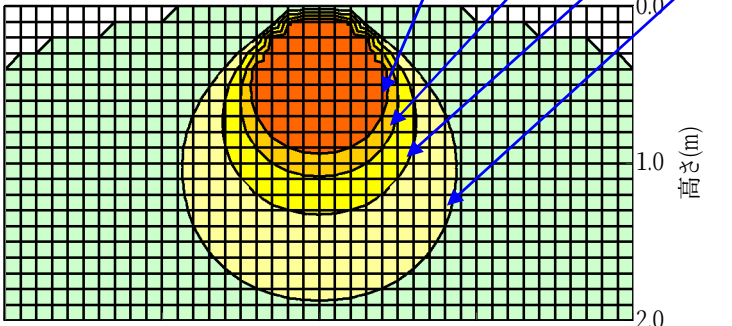
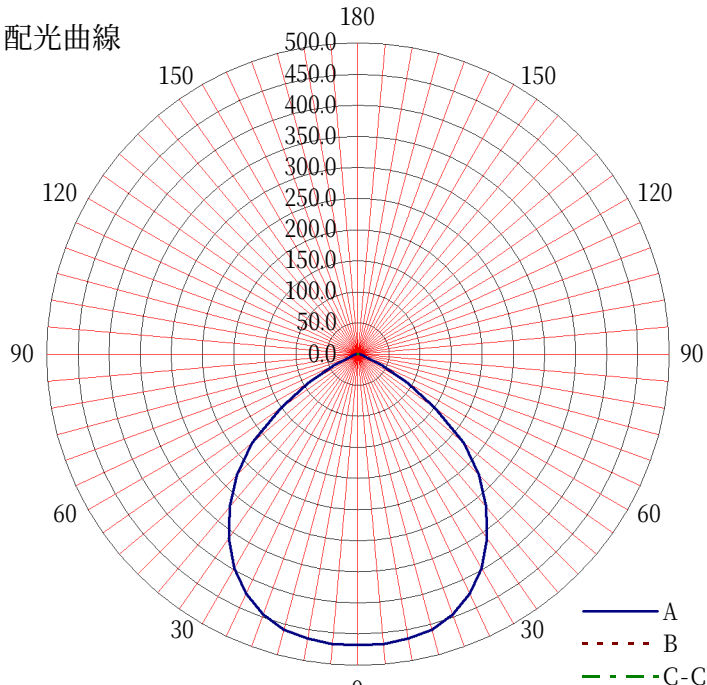


日立照明器具 照明特性

形式: WLDE4306WL <電球色(3,000K,Ra85)> <埋込穴Φ150>		天井	80%			70%				50%			30%			0%		
			70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
		反射率	壁															0%
			床	10%														0%
		室指数	照明率 S/H=1.0															

姿図 		0.6	0.65	0.55	0.48	0.64	0.54	0.48	0.44	0.53	0.48	0.43	0.53	0.47	0.43	0.42
		0.8	0.75	0.66	0.60	0.74	0.65	0.59	0.55	0.64	0.59	0.55	0.63	0.58	0.54	0.53
		1	0.82	0.73	0.67	0.80	0.73	0.67	0.63	0.71	0.66	0.62	0.70	0.65	0.62	0.60
		1.25	0.87	0.80	0.74	0.86	0.79	0.74	0.70	0.77	0.73	0.69	0.76	0.72	0.69	0.67
		1.5	0.91	0.84	0.79	0.90	0.84	0.79	0.75	0.82	0.78	0.74	0.80	0.77	0.74	0.72
		2	0.96	0.90	0.86	0.94	0.89	0.85	0.82	0.88	0.84	0.81	0.86	0.83	0.81	0.78
		2.5	0.98	0.94	0.90	0.97	0.93	0.89	0.86	0.91	0.88	0.85	0.89	0.87	0.84	0.82
		3	1.00	0.96	0.92	0.98	0.95	0.92	0.89	0.93	0.90	0.88	0.91	0.89	0.87	0.84
		4	1.02	0.99	0.96	1.01	0.98	0.95	0.93	0.96	0.94	0.92	0.94	0.92	0.90	0.88
		5	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.94	0.96	0.94	0.93	0.90
光源 品名 LED20.6W 形式 光束 1,500 lm		7	1.05	1.04	1.02	1.04	1.02	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.96	0.94
		10	1.07	1.06	1.05	1.06	1.05	1.04	1.03	1.03	1.02	1.01	1.00	1.00	0.99	0.97

器具効率 Ft= 100.0%		单体照度分布(初期) 															
上方光束 Fu= 0.0%																	
下方光束 Fd= 100.0%																	
最大取付間隔																	
A-A 1.26 H																	
B-B H																	
保守率		光源寿命 (h)		配光曲線 													
		40,000	60,000														
		良	0.77 0.71														
		中	0.73 0.67														
否	0.64 0.59																
光度 (cd/1000 lm)																	
	A-0	B-B	C-0	A'-0	C'-0												
0	467																
10	464																
20	445																
30	397																
40	320																
50	222																
60	92																
70	12																
80	6																
90																	
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	