


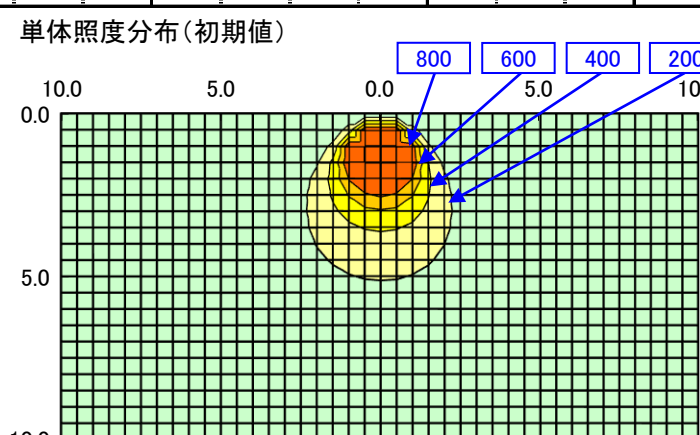


日立照明器具 照明特性

名称: 高天井用LED器具	天井 反射率	80%			70%				50%			30%			0%		
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
形式: WLMTE11AMN-J14A	床 室指数	10%															0%
		固有照明率 S/H=1.0															
＜備考＞ 配光角(広角)	0.6	0.65	0.54	0.48	0.64	0.54	0.48	0.43	0.53	0.47	0.43	0.52	0.47	0.43	0.41		
	0.8	0.74	0.65	0.58	0.73	0.64	0.58	0.54	0.63	0.58	0.53	0.62	0.57	0.53	0.51		
姿図 	1	0.80	0.72	0.66	0.79	0.71	0.65	0.61	0.70	0.64	0.60	0.68	0.64	0.60	0.58		
	1.25	0.86	0.78	0.72	0.84	0.77	0.72	0.68	0.76	0.71	0.67	0.74	0.70	0.67	0.65		
	1.5	0.89	0.83	0.77	0.88	0.82	0.77	0.73	0.80	0.76	0.72	0.79	0.75	0.72	0.70		
	2	0.94	0.89	0.84	0.93	0.88	0.84	0.80	0.86	0.82	0.79	0.84	0.81	0.78	0.76		
	2.5	0.97	0.92	0.88	0.95	0.91	0.87	0.84	0.89	0.86	0.83	0.87	0.85	0.82	0.80		
	3	0.98	0.94	0.91	0.97	0.93	0.90	0.87	0.91	0.89	0.86	0.89	0.87	0.85	0.83		
光源形式 —	4	1.01	0.97	0.95	0.99	0.96	0.94	0.91	0.94	0.92	0.90	0.92	0.90	0.89	0.86		
	5	1.02	1.00	0.97	1.01	0.99	0.96	0.94	0.96	0.95	0.93	0.94	0.93	0.91	0.89		
器具光束 11,000 lm	7	1.04	1.02	1.01	1.03	1.01	1.00	0.98	0.99	0.98	0.97	0.97	0.96	0.95	0.92		
	10	1.06	1.05	1.04	1.05	1.04	1.03	1.02	1.01	1.01	1.00	0.99	0.99	0.98	0.95		
器具効率 Ft= 100%		単体照度分布(初期値)  0-200 200-400 400-600 600-800 800-1000															
上方光束 Fu= 0%																	
下方光束 Fd= 100%																	
最大取付間隔																	
A-A 1.24 H B-B 1.20 H																	
保守率	良	0.81															
	中	0.79															
	否	0.75															
光度 (cd/1000 lm)																	
	A-0	B-B	C-0	A'-0	C'-0												
0	476	476	476														
10	472	474	467														
20	447	448	447														
30	397	385	388														
40	308	282	288														
50	214	189	192														
60	105	93	89														
70	41	41	37														
80	13	12	14														
90																	
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	

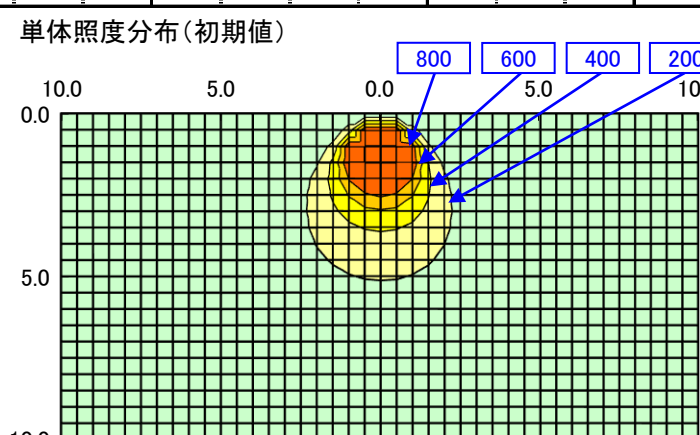

0-200
200-400
400-600
600-800
800-1000

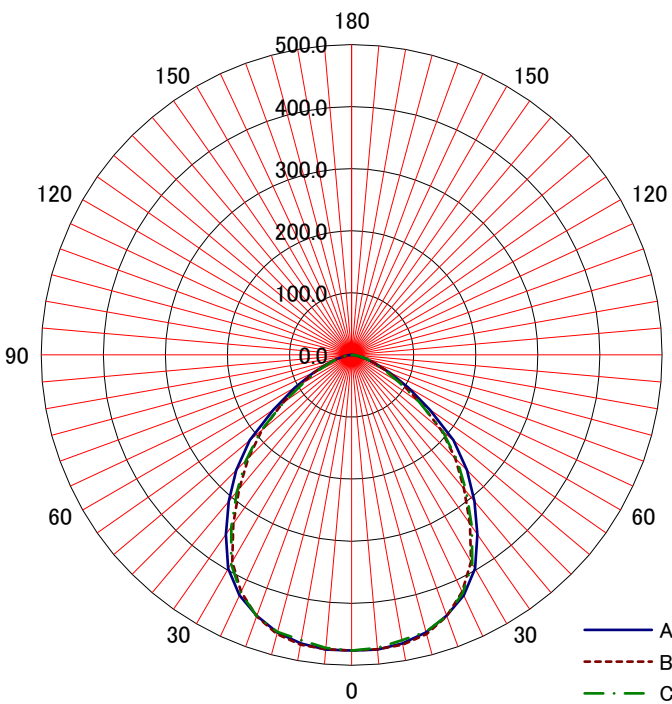

A
B
C-C'