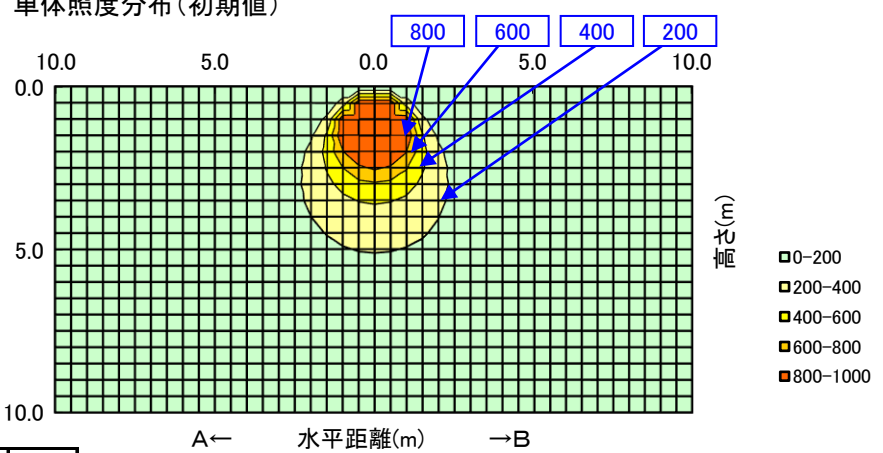
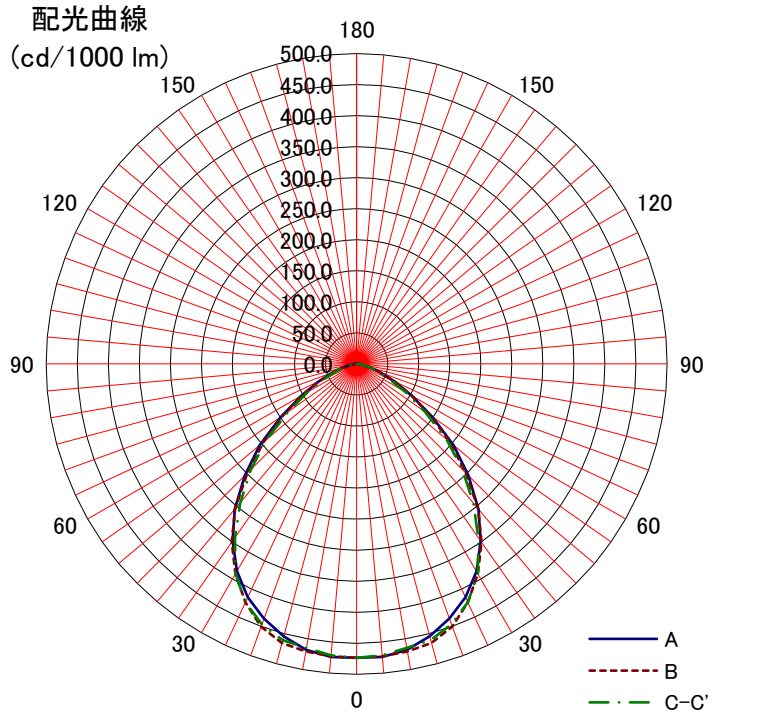


日立照明器具 照明特性

名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%																																																																																																																							
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																							
形式: WLMTE11AMN-J14B		床	10%														0%																																																																																																																						
	室指数	固有照明率 S/H=1.0																																																																																																																																					
<備考>	0.6	0.65	0.54	0.48	0.64	0.54	0.48	0.43	0.53	0.47	0.43	0.52	0.47	0.43	0.41																																																																																																																								
	0.8	0.74	0.65	0.58	0.73	0.64	0.58	0.54	0.63	0.58	0.53	0.62	0.57	0.53	0.51																																																																																																																								
姿図	1	0.81	0.72	0.66	0.79	0.71	0.65	0.61	0.70	0.65	0.61	0.68	0.64	0.60	0.58																																																																																																																								
	1.25	0.86	0.78	0.72	0.85	0.77	0.72	0.68	0.76	0.71	0.67	0.74	0.70	0.67	0.65																																																																																																																								
	1.5	0.90	0.83	0.78	0.88	0.82	0.77	0.73	0.80	0.76	0.72	0.79	0.75	0.72	0.70																																																																																																																								
	2	0.94	0.89	0.84	0.93	0.88	0.84	0.80	0.86	0.83	0.79	0.84	0.81	0.79	0.77																																																																																																																								
	2.5	0.97	0.92	0.88	0.96	0.91	0.88	0.85	0.89	0.86	0.84	0.88	0.85	0.83	0.80																																																																																																																								
	3	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.92	0.89	0.86	0.90	0.87	0.85	0.83																																																																																																																								
光源形式	4	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.92	0.90	0.93	0.91	0.89	0.86																																																																																																																								
	5	1.03	1.00	0.98	1.01	0.99	0.97	0.95	0.97	0.95	0.93	0.95	0.93	0.92	0.89																																																																																																																								
器具光束	7	1.05	1.03	1.01	1.03	1.02	1.00	0.99	1.00	0.98	0.97	0.98	0.96	0.95	0.93																																																																																																																								
	11,000 lm	10	1.06	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.96																																																																																																																								
器具効率 Ft= 100%		単体照度分布(初期値) 																																																																																																																																					
上方光束 Fu= 0%																																																																																																																																							
下方光束 Fd= 100%																																																																																																																																							
最大取付間隔		配光曲線 (cd/1000 lm) 																																																																																																																																					
A-A 1.22 H																																																																																																																																							
B-B 1.22 H																																																																																																																																							
保守率																																																																																																																																							
良	0.83	光度 (cd/1000 lm) <table><tr><td></td><td>A-0</td><td>B-B</td><td>C-0</td><td>A'-0</td><td>C'-0</td></tr><tr><td>0</td><td>473</td><td>473</td><td>473</td><td></td><td></td></tr><tr><td>10</td><td>468</td><td>470</td><td>465</td><td></td><td></td></tr><tr><td>20</td><td>436</td><td>451</td><td>447</td><td></td><td></td></tr><tr><td>30</td><td>386</td><td>391</td><td>390</td><td></td><td></td></tr><tr><td>40</td><td>306</td><td>305</td><td>292</td><td></td><td></td></tr><tr><td>50</td><td>204</td><td>196</td><td>190</td><td></td><td></td></tr><tr><td>60</td><td>103</td><td>102</td><td>91</td><td></td><td></td></tr><tr><td>70</td><td>41</td><td>41</td><td>36</td><td></td><td></td></tr><tr><td>80</td><td>13</td><td>13</td><td>13</td><td></td><td></td></tr><tr><td>90</td><td>1</td><td>1</td><td>1</td><td></td><td></td></tr><tr><td>100</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>110</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></table>															A-0	B-B	C-0	A'-0	C'-0	0	473	473	473			10	468	470	465			20	436	451	447			30	386	391	390			40	306	305	292			50	204	196	190			60	103	102	91			70	41	41	36			80	13	13	13			90	1	1	1			100						110						120						130						140						150						160						170						180					
																A-0	B-B	C-0	A'-0	C'-0																																																																																																																			
0	473															473	473																																																																																																																						
10	468															470	465																																																																																																																						
20	436	451	447																																																																																																																																				
30	386	391	390																																																																																																																																				
40	306	305	292																																																																																																																																				
50	204	196	190																																																																																																																																				
60	103	102	91																																																																																																																																				
70	41	41	36																																																																																																																																				
80	13	13	13																																																																																																																																				
90	1	1	1																																																																																																																																				
100																																																																																																																																							
110																																																																																																																																							
120																																																																																																																																							
130																																																																																																																																							
140																																																																																																																																							
150																																																																																																																																							
160																																																																																																																																							
170																																																																																																																																							
180																																																																																																																																							
中	0.81																																																																																																																																						
	0.76																																																																																																																																						