
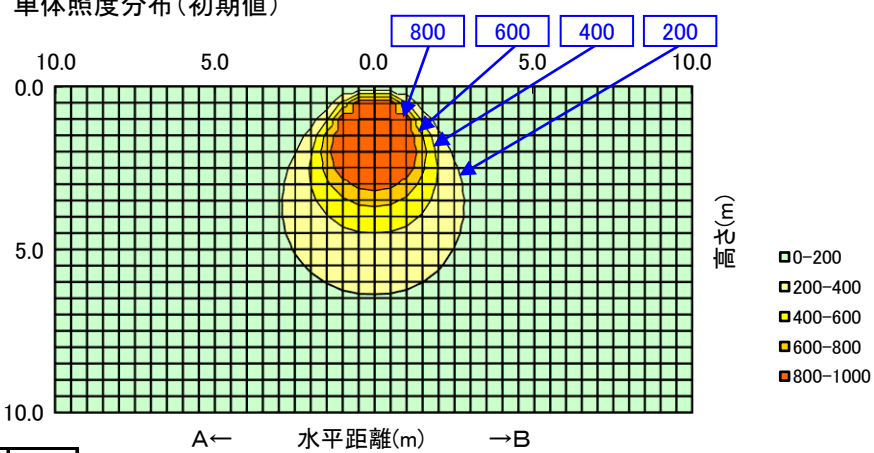
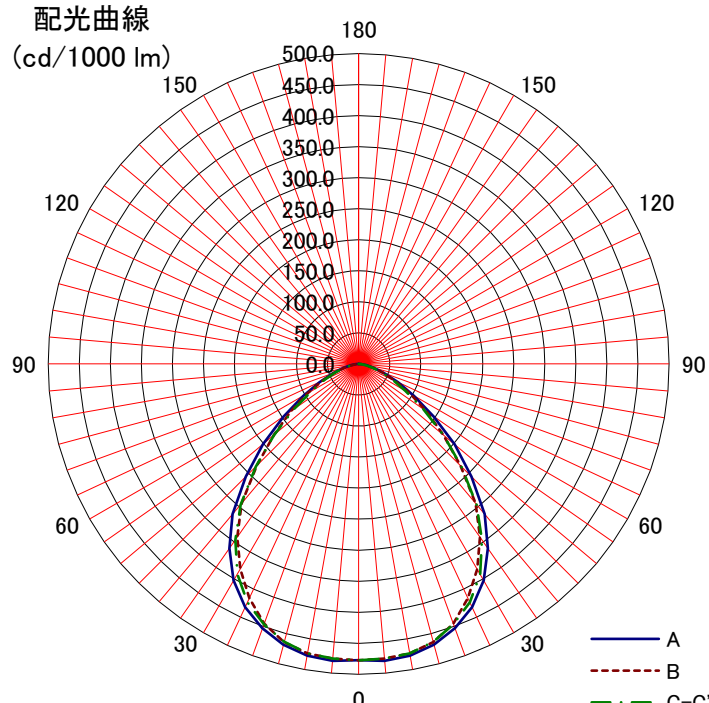


日立照明器具 照明特性

名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: WLMTE17AMN-J14A	室指数	固有照明率 S/H=1.0														
<備考> 配光角(広角)	0.6	0.65	0.54	0.48	0.64	0.54	0.48	0.43	0.53	0.47	0.43	0.52	0.47	0.43	0.41	
	0.8	0.74	0.65	0.58	0.73	0.64	0.58	0.54	0.63	0.58	0.53	0.62	0.57	0.53	0.51	
姿図 	1	0.80	0.72	0.66	0.79	0.71	0.65	0.61	0.70	0.64	0.60	0.68	0.64	0.60	0.58	
	1.25	0.85	0.78	0.72	0.84	0.77	0.72	0.68	0.76	0.71	0.67	0.74	0.70	0.67	0.65	
	1.5	0.89	0.83	0.77	0.88	0.82	0.77	0.73	0.80	0.76	0.72	0.78	0.75	0.72	0.70	
	2	0.94	0.88	0.84	0.93	0.88	0.83	0.80	0.86	0.82	0.79	0.84	0.81	0.78	0.76	
	2.5	0.96	0.92	0.88	0.95	0.91	0.87	0.84	0.89	0.86	0.83	0.87	0.85	0.82	0.80	
	3	0.98	0.94	0.91	0.97	0.93	0.90	0.87	0.91	0.88	0.86	0.89	0.87	0.85	0.82	
	4	1.00	0.97	0.94	0.99	0.96	0.93	0.91	0.94	0.92	0.90	0.92	0.90	0.89	0.86	
光源形式 -	5	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.96	0.94	0.93	0.94	0.93	0.91	0.89	
	7	1.04	1.02	1.00	1.03	1.01	0.99	0.98	0.99	0.98	0.96	0.97	0.96	0.95	0.92	
器具光束 17,000 lm	10	1.05	1.04	1.03	1.04	1.03	1.02	1.01	1.01	1.00	0.99	0.99	0.98	0.98	0.95	

器具効率 Ft= 100%			単体照度分布(初期値) 			
上方光束 Fu= 0%						
下方光束 Fd= 100%						
最大取付間隔						
A-A 1.26 H						
B-B 1.20 H						
保守率						
良 0.81						
中 0.79						
否 0.75						
光度 (cd/1000 lm)						
	A-0	B-B	C-0	A'-0	C'-0	配光曲線 (cd/1000 lm) 
0	477	477	477			
10	477	474	474			
20	453	445	446			
30	403	382	391			
40	316	293	296			
50	202	178	178			
60	103	95	87			
70	44	41	39			
80	12	11	11			
90						
100						
110						
120						
130						
140						
150						
160						
170						
180						