

日立照明器具 照明特性

形式: WMTE0901MN WMTE0902MN 〈250クラス〉 〈ビームの開き:90度相当〉	反 射 率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
		室指数	照明率 S/H=1.0													
光源	0.6	0.6	0.56	0.50	0.65	0.56	0.50	0.45	0.55	0.49	0.45	0.54	0.49	0.45	0.43	
	0.8	0.76	0.67	0.61	0.75	0.66	0.61	0.56	0.65	0.60	0.56	0.64	0.59	0.56	0.54	
	1	0.82	0.74	0.68	0.81	0.74	0.68	0.64	0.72	0.67	0.63	0.71	0.67	0.63	0.61	
	1.25	0.88	0.81	0.75	0.86	0.80	0.75	0.71	0.78	0.74	0.70	0.77	0.73	0.70	0.68	
	1.5	0.92	0.85	0.80	0.90	0.84	0.80	0.76	0.83	0.79	0.76	0.81	0.78	0.75	0.73	
	2	0.96	0.91	0.87	0.95	0.90	0.86	0.83	0.89	0.85	0.82	0.87	0.84	0.82	0.80	
	2.5	0.99	0.94	0.91	0.97	0.93	0.90	0.87	0.92	0.89	0.86	0.90	0.87	0.85	0.83	
	3	1.00	0.96	0.93	0.99	0.95	0.92	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.85	
	4	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.96	0.94	0.92	0.94	0.93	0.91	0.89	
	5	1.04	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.97	0.95	0.96	0.95	0.94	0.91	
品名 LED	7	1.06	1.04	1.02	1.04	1.03	1.01	1.00	1.01	1.00	0.99	0.99	0.98	0.97	0.94	
形式 LED	10	1.07	1.06	1.05	1.06	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.00	1.00	0.97	
光束 9,100 lm																

器具効率 Ft= 100.0%
上方光束 Fu= 0.0%
下方光束 Fd= 100.0%

配光分類
BZ-

最大取付間隔

A-A 1.38 H


B-B 0.02 H

保守率	良	0.79
	中	0.75
	否	0.71

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	397		
10	435		
20	507		
30	401		
40	301		
50	224		
60	97		
70	6		
80			
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

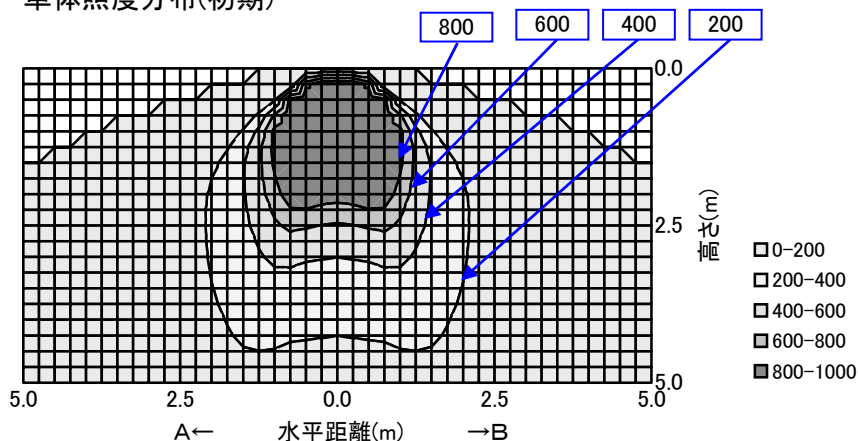

配光曲線

