

日立照明器具 照明特性

形式: WMTE0901NN WMTE0902NN 〈250クラス〉 〈ビームの開き:60度相当〉	反 射 率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
		室指数	照明率 S/H=1.0													
光源	0.6	0.6	0.81	0.74	0.69	0.80	0.73	0.69	0.66	0.73	0.69	0.66	0.72	0.69	0.66	0.65
	0.8	0.8	0.88	0.82	0.78	0.87	0.81	0.78	0.75	0.81	0.77	0.74	0.80	0.77	0.74	0.73
	1	1	0.92	0.87	0.83	0.91	0.86	0.83	0.80	0.85	0.82	0.79	0.84	0.81	0.79	0.78
	1.25	1.25	0.95	0.91	0.87	0.94	0.90	0.87	0.84	0.89	0.86	0.84	0.88	0.85	0.83	0.82
	1.5	1.5	0.98	0.94	0.91	0.97	0.93	0.90	0.88	0.92	0.89	0.87	0.91	0.88	0.87	0.85
	2	2	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.91	0.94	0.92	0.91	0.89
	2.5	2.5	1.02	1.00	0.97	1.01	0.99	0.96	0.95	0.97	0.95	0.94	0.95	0.94	0.93	0.91
	3	3	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.95	0.94	0.92
	4	4	1.04	1.02	1.01	1.03	1.02	1.00	0.98	1.00	0.98	0.97	0.98	0.97	0.96	0.94
	5	5	1.05	1.04	1.02	1.04	1.03	1.02	1.00	1.01	1.00	0.99	0.99	0.98	0.97	0.95
品名 LED	7	7	1.07	1.06	1.05	1.06	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.00	1.00	0.97
形式 LED	10	10	1.08	1.07	1.07	1.07	1.06	1.06	1.05	1.04	1.04	1.03	1.02	1.02	1.01	0.99
光束 9,300 lm																

器具効率 Ft= 100.0%
上方光束 Fu= 0.0%
下方光束 Fd= 100.0%

配光分類

BZ-

最大取付間隔

A-A 0.96 H


B-B H

保守率	良	0.79
	中	0.75
	否	0.71

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	940		
10	950		
20	766		
30	511		
40	222		
50	70		
60	15		
70	3		
80			
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

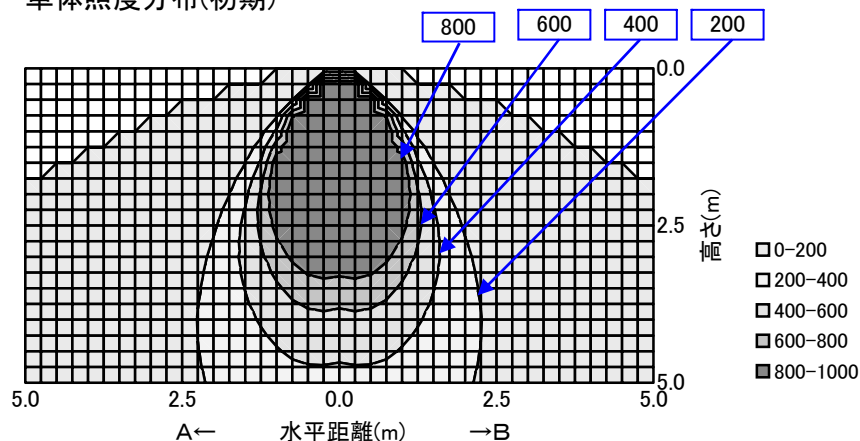

配光曲線

