

日立照明器具 照明特性

形式: WMTE1401MN WMTE1402MN	反 射 率	天井 壁 床	80%			70%				50%			30%			0%
			70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			10%													0%
			照明率 S/H=1.0													
<400クラス> <ビームの開き:90度相当>	室指数	0.6	0.66	0.56	0.50	0.65	0.56	0.50	0.45	0.55	0.49	0.45	0.54	0.49	0.45	0.43
		0.8	0.76	0.67	0.61	0.75	0.67	0.61	0.56	0.65	0.60	0.56	0.64	0.59	0.56	0.54
		1	0.83	0.74	0.68	0.81	0.74	0.68	0.64	0.72	0.67	0.64	0.71	0.67	0.63	0.61
		1.25	0.88	0.81	0.75	0.86	0.80	0.75	0.71	0.78	0.74	0.70	0.77	0.73	0.70	0.68
		1.5	0.92	0.85	0.80	0.90	0.84	0.80	0.76	0.83	0.79	0.76	0.81	0.78	0.75	0.73
		2	0.96	0.91	0.87	0.95	0.90	0.86	0.83	0.89	0.85	0.82	0.87	0.84	0.82	0.80
		2.5	0.99	0.94	0.91	0.97	0.93	0.90	0.87	0.92	0.89	0.86	0.90	0.87	0.85	0.83
		3	1.00	0.96	0.93	0.99	0.95	0.92	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.85
		4	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.96	0.94	0.92	0.94	0.93	0.91	0.89
		5	1.04	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.97	0.95	0.96	0.95	0.94	0.91
光源																
品名	LED															
形式	LED															
光束	13,700 lm															

器具効率 Ft= 100.0%
上方光束 Fu= 0.0%
下方光束 Fd= 100.0%

配光分類
BZ-


最大取付間隔
A-A 1.38 H
B-B 0.02 H

保守率	良	0.79
	中	0.75
	否	0.71

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	404		
10	441		
20	506		
30	403		
40	304		
50	222		
60	93		
70	9		
80			
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

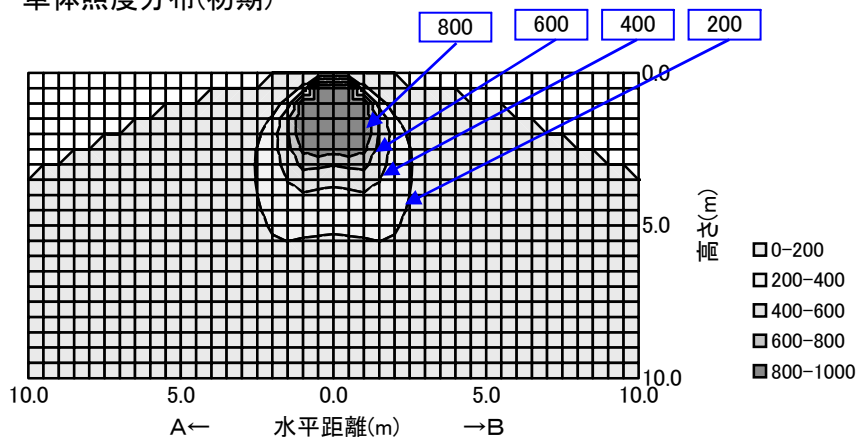

配光曲線

