

日立照明器具 照明特性

形式: WMTE1401NN WMTE1402NN	反 射 率	天井 壁 床	80%			70%				50%			30%			0%
			70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			10%													0%
			照明率 S/H=1.0													
<400クラス> <ビームの開き:60度相当>	室指数	0.6	0.80	0.74	0.69	0.80	0.73	0.69	0.66	0.72	0.69	0.66	0.72	0.68	0.66	0.65
		0.8	0.88	0.82	0.78	0.87	0.81	0.77	0.74	0.80	0.77	0.74	0.79	0.76	0.74	0.73
		1	0.92	0.87	0.83	0.91	0.86	0.82	0.80	0.85	0.82	0.79	0.84	0.81	0.79	0.77
		1.25	0.95	0.91	0.87	0.94	0.90	0.87	0.84	0.89	0.86	0.84	0.88	0.85	0.83	0.82
		1.5	0.98	0.94	0.91	0.97	0.93	0.90	0.88	0.92	0.89	0.87	0.90	0.88	0.86	0.85
		2	1.01	0.97	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.91	0.94	0.92	0.90	0.89
		2.5	1.02	0.99	0.97	1.01	0.99	0.96	0.95	0.97	0.95	0.93	0.95	0.94	0.92	0.91
		3	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.95	0.94	0.92
		4	1.04	1.02	1.01	1.03	1.01	1.00	0.98	1.00	0.98	0.97	0.98	0.97	0.96	0.93
		5	1.05	1.04	1.02	1.04	1.03	1.01	1.00	1.01	1.00	0.99	0.99	0.98	0.97	0.95
光源																
品名	LED															
形式	LED															
光束	14,000 lm															

器具効率 Ft= 100.0%
上方光束 Fu= 0.0%
下方光束 Fd= 100.0%

配光分類
BZ-


最大取付間隔
A-A 0.92 H
B-B H

保守率	良	0.79
	中	0.75
	否	0.71

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	971		
10	940		
20	769		
30	505		
40	227		
50	67		
60	16		
70	4		
80	1		
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

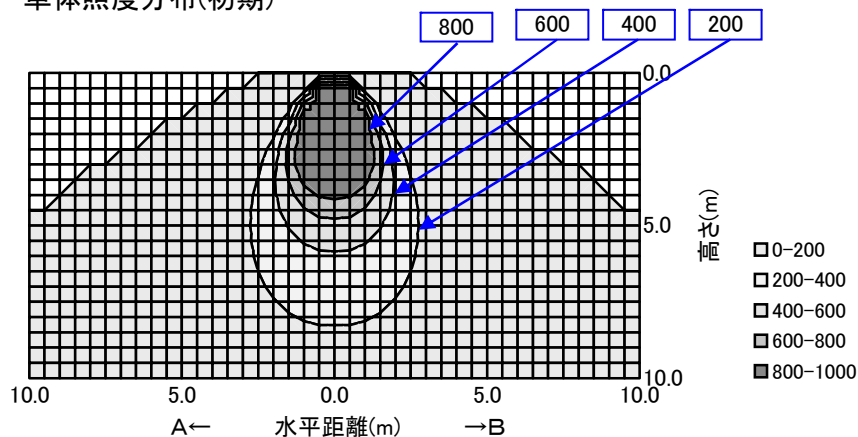

配光曲線

