
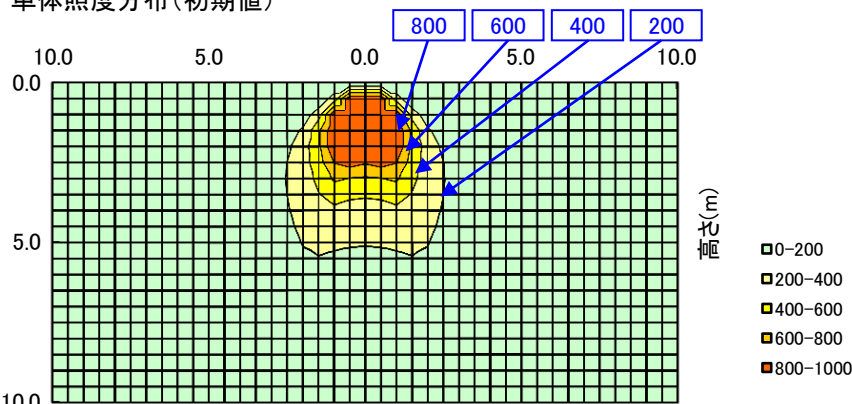
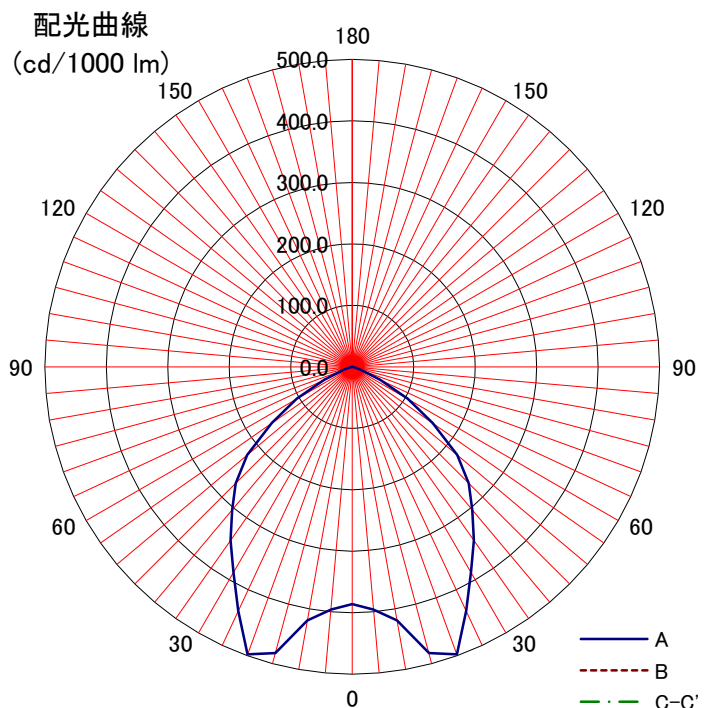


日立照明器具 照明特性

名称: 高天井用LED器具	反 射 率	天井	80%			70%				50%			30%			0%																																																																																																																							
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																							
		床	10%													0%																																																																																																																							
形式: WMTE1403MN-J14B	室指数	固有照明率 S/H=1.0																																																																																																																																					
<備考> 水銀ランプ400クラス ビームの開き角: 90°	0.6	0.66	0.55	0.49	0.64	0.55	0.48	0.44	0.54	0.48	0.44	0.53	0.48	0.44	0.42																																																																																																																								
	0.8	0.76	0.66	0.60	0.74	0.66	0.59	0.55	0.64	0.59	0.55	0.63	0.58	0.55	0.53																																																																																																																								
姿図 	1	0.82	0.73	0.67	0.81	0.73	0.67	0.63	0.71	0.66	0.62	0.70	0.66	0.62	0.60																																																																																																																								
	1.25	0.87	0.80	0.74	0.86	0.79	0.74	0.70	0.78	0.73	0.69	0.76	0.72	0.69	0.67																																																																																																																								
	1.5	0.91	0.85	0.80	0.90	0.84	0.79	0.75	0.82	0.78	0.75	0.81	0.77	0.74	0.72																																																																																																																								
	2	0.96	0.91	0.86	0.94	0.90	0.86	0.82	0.88	0.85	0.82	0.86	0.83	0.81	0.79																																																																																																																								
	2.5	0.98	0.94	0.90	0.97	0.93	0.90	0.87	0.91	0.88	0.86	0.89	0.87	0.85	0.82																																																																																																																								
	3	1.00	0.96	0.93	0.99	0.95	0.92	0.89	0.93	0.91	0.88	0.91	0.89	0.87	0.85																																																																																																																								
	4	1.02	0.99	0.96	1.01	0.98	0.96	0.93	0.96	0.94	0.92	0.94	0.92	0.91	0.88																																																																																																																								
光源形式	5	1.04	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.95	0.93	0.91																																																																																																																								
LED	7	1.06	1.04	1.02	1.04	1.03	1.01	1.00	1.01	0.99	0.98	0.99	0.98	0.97	0.94																																																																																																																								
器具光束	10	1.07	1.06	1.05	1.06	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.00	0.99	0.97																																																																																																																								
13,500 lm																																																																																																																																							
器具効率 Ft= 100%		単体照度分布 (初期値) 																																																																																																																																					
上方光束 Fu= 0.0%																																																																																																																																							
下方光束 Fd= 100.0%																																																																																																																																							
最大取付間隔		配光曲線 (cd/1000 lm) 																																																																																																																																					
A-A 1.40 H																																																																																																																																							
B-B H																																																																																																																																							
保守率																																																																																																																																							
良	0.81	光度 (cd/1000 lm) <table><tr><th></th><th>A-0</th><th>B-B</th><th>C-0</th><th>A'-0</th><th>C'-0</th></tr><tr><td>0</td><td>386</td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td>419</td><td></td><td></td><td></td><td></td></tr><tr><td>20</td><td>498</td><td></td><td></td><td></td><td></td></tr><tr><td>30</td><td>386</td><td></td><td></td><td></td><td></td></tr><tr><td>40</td><td>304</td><td></td><td></td><td></td><td></td></tr><tr><td>50</td><td>223</td><td></td><td></td><td></td><td></td></tr><tr><td>60</td><td>104</td><td></td><td></td><td></td><td></td></tr><tr><td>70</td><td>15</td><td></td><td></td><td></td><td></td></tr><tr><td>80</td><td>1</td><td></td><td></td><td></td><td></td></tr><tr><td>90</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>100</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>110</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></table>															A-0	B-B	C-0	A'-0	C'-0	0	386					10	419					20	498					30	386					40	304					50	223					60	104					70	15					80	1					90						100						110						120						130						140						150						160						170						180					
	A-0															B-B	C-0	A'-0	C'-0																																																																																																																				
0	386																																																																																																																																						
10	419																																																																																																																																						
20	498																																																																																																																																						
30	386																																																																																																																																						
40	304																																																																																																																																						
50	223																																																																																																																																						
60	104																																																																																																																																						
70	15																																																																																																																																						
80	1																																																																																																																																						
90																																																																																																																																							
100																																																																																																																																							
110																																																																																																																																							
120																																																																																																																																							
130																																																																																																																																							
140																																																																																																																																							
150																																																																																																																																							
160																																																																																																																																							
170																																																																																																																																							
180																																																																																																																																							
中	0.79																																																																																																																																						
否	0.75																																																																																																																																						