
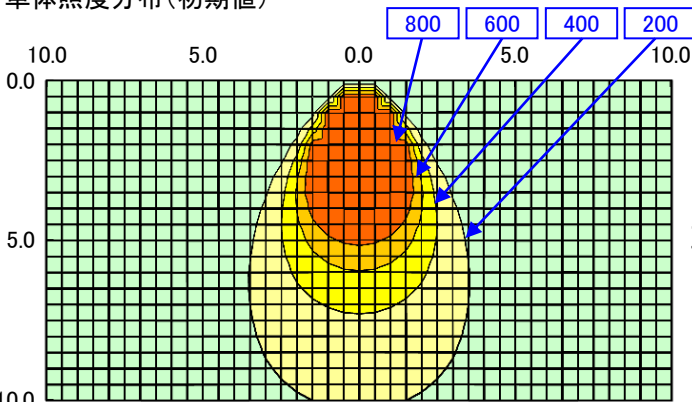

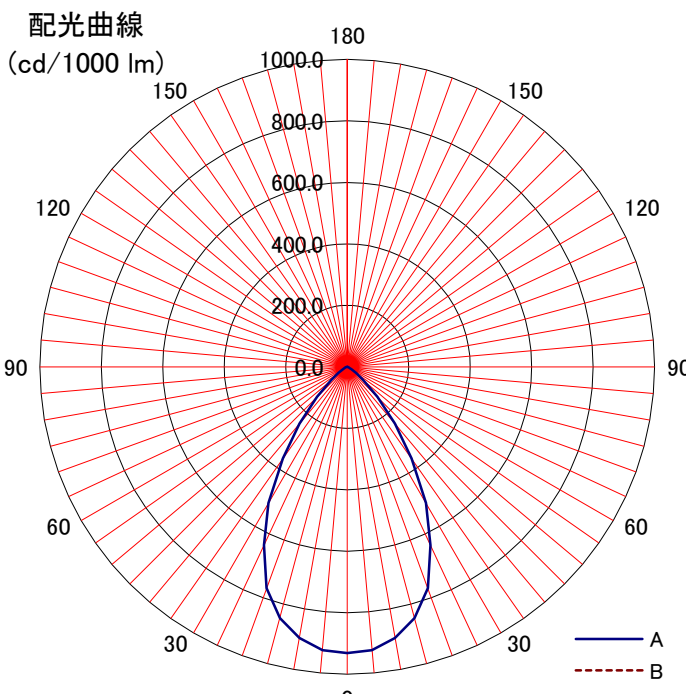


日立照明器具 照明特性

名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
形式: WMTE2203NN-J14B	室指数	固有照明率 S/H=1.0														
＜備考＞ マルチライトランプ400クラス ビームの開き角: 60°	0.6	0.80	0.73	0.68	0.79	0.73	0.68	0.65	0.72	0.68	0.65	0.71	0.68	0.65	0.64	
	0.8	0.87	0.81	0.77	0.86	0.81	0.77	0.74	0.80	0.76	0.74	0.79	0.76	0.73	0.72	
姿図 	1	0.92	0.86	0.82	0.91	0.86	0.82	0.79	0.85	0.81	0.79	0.84	0.81	0.78	0.77	
	1.25	0.95	0.90	0.87	0.94	0.90	0.86	0.84	0.89	0.86	0.83	0.87	0.85	0.83	0.81	
	1.5	0.98	0.94	0.90	0.97	0.93	0.90	0.87	0.91	0.89	0.87	0.90	0.88	0.86	0.84	
	2	1.01	0.97	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.91	0.94	0.92	0.90	0.88	
	2.5	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.97	0.95	0.93	0.95	0.94	0.92	0.90	
	3	1.03	1.01	0.98	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.95	0.94	0.92	
光源形式	4	1.04	1.02	1.01	1.03	1.01	1.00	0.98	1.00	0.98	0.97	0.98	0.97	0.96	0.93	
LED	5	1.05	1.04	1.02	1.04	1.03	1.01	1.00	1.01	1.00	0.99	0.99	0.98	0.97	0.95	
器具光束	7	1.07	1.06	1.05	1.06	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.00	1.00	0.97	
22,800 lm	10	1.08	1.07	1.07	1.07	1.06	1.06	1.05	1.04	1.04	1.03	1.02	1.02	1.01	0.99	
器具効率 Ft= 100%		単体照度分布 (初期値)  0-200 200-400 400-600 600-800 800-1000														
上方光束 Fu= 0.0%																
下方光束 Fd= 100.0%																
最大取付間隔																
A-A 0.96 H																
B-B H																
保守率	良	0.81		配光曲線 (cd/1000 lm)  A B C-C'												
	中	0.79														
	否	0.75														
光 度 (cd/1000 lm)		A-0	B-B	C-0	A'-0	C'-0										
0		932														
10		896														
20		766														
30		512														
40		241														
50		66														
60		16														
70		5														
80																
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																