

日立照明器具 照明特性

形式: WMTE2701NN WMTE2702NN 〈700クラス〉 〈ビームの開き:60度相当〉	反 射 率	天井 壁 床	80%			70%				50%			30%			0%
			70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			10%													0%
			照明率 S/H=1.0													
光源	0.6		0.82	0.75	0.71	0.81	0.75	0.71	0.68	0.74	0.71	0.68	0.74	0.70	0.68	0.67
	0.8		0.89	0.83	0.79	0.88	0.83	0.79	0.76	0.82	0.79	0.76	0.81	0.78	0.76	0.75
	1		0.93	0.88	0.84	0.92	0.87	0.84	0.81	0.86	0.83	0.81	0.85	0.83	0.81	0.79
	1.25		0.96	0.92	0.88	0.95	0.91	0.88	0.86	0.90	0.87	0.85	0.89	0.86	0.85	0.83
	1.5		0.99	0.95	0.92	0.98	0.94	0.91	0.89	0.93	0.90	0.88	0.91	0.89	0.88	0.86
	2		1.01	0.98	0.96	1.00	0.97	0.95	0.93	0.96	0.94	0.92	0.95	0.93	0.91	0.90
	2.5		1.03	1.00	0.98	1.02	0.99	0.97	0.95	0.98	0.96	0.94	0.96	0.95	0.93	0.91
	3		1.03	1.01	0.99	1.02	1.00	0.98	0.97	0.99	0.97	0.96	0.97	0.96	0.94	0.92
	4		1.05	1.03	1.01	1.04	1.02	1.00	0.99	1.00	0.99	0.98	0.98	0.97	0.96	0.94
	5		1.06	1.04	1.03	1.04	1.03	1.02	1.01	1.01	1.00	0.99	0.99	0.99	0.98	0.95
品名 LED	7		1.07	1.06	1.05	1.06	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.00	1.00	0.97
形式 LED	10		1.08	1.07	1.07	1.07	1.06	1.06	1.05	1.04	1.04	1.03	1.02	1.02	1.02	0.99
光束 28,000 lm																

器具効率 Ft= 100.0%
上方光束 Fu= 0.0%
下方光束 Fd= 100.0%

配光分類
BZ-

最大取付間隔

A-A 0.92 H


B-B 0.02 H

保守率	良	0.79
	中	0.75
	否	0.71

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	994		
10	1041		
20	815		
30	483		
40	220		
50	59		
60	13		
70			
80			
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

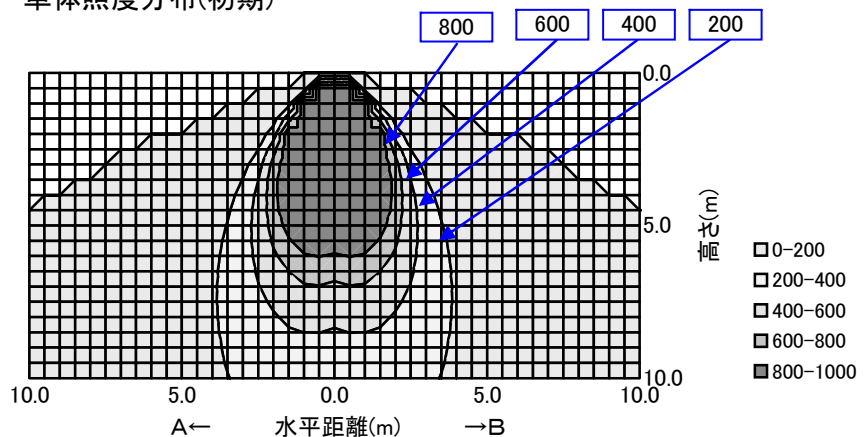

配光曲線

