


# 日立照明器具 照明特性

| 名称: 直管形LED搭載器具                                                                          | 反射率  | 天井          | 80%  |      |      | 70%  |      |      |      | 50%  |      |      | 30%  |      |      | 0%   |
|-----------------------------------------------------------------------------------------|------|-------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
|                                                                                         |      | 壁           | 70%  | 50%  | 30%  | 70%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 0%   |
|                                                                                         |      | 床           | 10%  |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 形式: WNKE4121-JM14AE2                                                                    | 室指数  | 照明率 S/H=1.0 |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| <備考>                                                                                    | 0.6  | 0.51        | 0.39 | 0.32 | 0.50 | 0.39 | 0.31 | 0.26 | 0.37 | 0.31 | 0.26 | 0.36 | 0.30 | 0.26 | 0.23 |      |
|                                                                                         | 0.8  | 0.60        | 0.48 | 0.40 | 0.58 | 0.47 | 0.40 | 0.34 | 0.46 | 0.39 | 0.34 | 0.44 | 0.38 | 0.33 | 0.31 |      |
| 姿図<br> | 1    | 0.66        | 0.55 | 0.47 | 0.64 | 0.54 | 0.46 | 0.40 | 0.52 | 0.45 | 0.40 | 0.50 | 0.44 | 0.39 | 0.36 |      |
|                                                                                         | 1.25 | 0.71        | 0.61 | 0.53 | 0.69 | 0.60 | 0.52 | 0.47 | 0.57 | 0.51 | 0.46 | 0.55 | 0.50 | 0.45 | 0.42 |      |
|                                                                                         | 1.5  | 0.75        | 0.66 | 0.58 | 0.73 | 0.64 | 0.57 | 0.52 | 0.62 | 0.56 | 0.51 | 0.60 | 0.54 | 0.50 | 0.47 |      |
|                                                                                         | 2    | 0.81        | 0.72 | 0.66 | 0.79 | 0.71 | 0.65 | 0.59 | 0.68 | 0.63 | 0.58 | 0.66 | 0.61 | 0.57 | 0.54 |      |
|                                                                                         | 2.5  | 0.84        | 0.77 | 0.71 | 0.82 | 0.75 | 0.70 | 0.65 | 0.73 | 0.68 | 0.63 | 0.70 | 0.66 | 0.62 | 0.59 |      |
|                                                                                         | 3    | 0.86        | 0.80 | 0.74 | 0.84 | 0.78 | 0.73 | 0.68 | 0.76 | 0.71 | 0.67 | 0.73 | 0.69 | 0.66 | 0.62 |      |
|                                                                                         | 光源   | 4           | 0.90 | 0.84 | 0.79 | 0.88 | 0.83 | 0.78 | 0.74 | 0.80 | 0.76 | 0.72 | 0.77 | 0.74 | 0.71 | 0.67 |
| 品名 直管形LEDランプ                                                                            | 5    | 0.92        | 0.87 | 0.83 | 0.90 | 0.86 | 0.82 | 0.78 | 0.83 | 0.79 | 0.76 | 0.80 | 0.77 | 0.74 | 0.71 |      |
| 形式 LDK40SS・D/15/23NE                                                                    | 7    | 0.94        | 0.91 | 0.88 | 0.93 | 0.89 | 0.86 | 0.84 | 0.86 | 0.84 | 0.82 | 0.84 | 0.82 | 0.79 | 0.76 |      |
| 光束 2,330 lm                                                                             | 10   | 0.97        | 0.94 | 0.92 | 0.95 | 0.93 | 0.90 | 0.88 | 0.90 | 0.88 | 0.86 | 0.87 | 0.85 | 0.84 | 0.80 |      |

器具効率 Ft= 94.6%  
 上方光束 Fu= 3.4%  
 下方光束 Fd= 91.2%


## 最大取付間隔

|     |      |      |
|-----|------|------|
| A-A | 1.32 | H    |
| B-B | 1.26 | H    |
| 保守率 | 良    | 0.86 |
|     | 中    | 0.81 |
|     | 否    | 0.72 |

## 光度 (cd/1000 lm)

|     | A-0 | B-B | C-0 | A'-0 | C'-0 |
|-----|-----|-----|-----|------|------|
| 0   | 261 | 261 | 261 |      |      |
| 10  | 255 | 257 | 255 |      |      |
| 20  | 246 | 241 | 241 |      |      |
| 30  | 232 | 222 | 222 |      |      |
| 40  | 210 | 184 | 197 |      |      |
| 50  | 188 | 150 | 168 |      |      |
| 60  | 165 | 112 | 139 |      |      |
| 70  | 142 | 68  | 109 |      |      |
| 80  | 119 | 31  | 86  |      |      |
| 90  | 95  |     | 65  |      |      |
| 100 | 25  |     | 4   |      |      |
| 110 |     |     |     |      |      |
| 120 |     |     |     |      |      |
| 130 |     |     |     |      |      |
| 140 |     |     |     |      |      |
| 150 |     |     |     |      |      |
| 160 |     |     |     |      |      |
| 170 |     |     |     |      |      |
| 180 |     |     |     |      |      |

## 単体照度分布 (初期値)

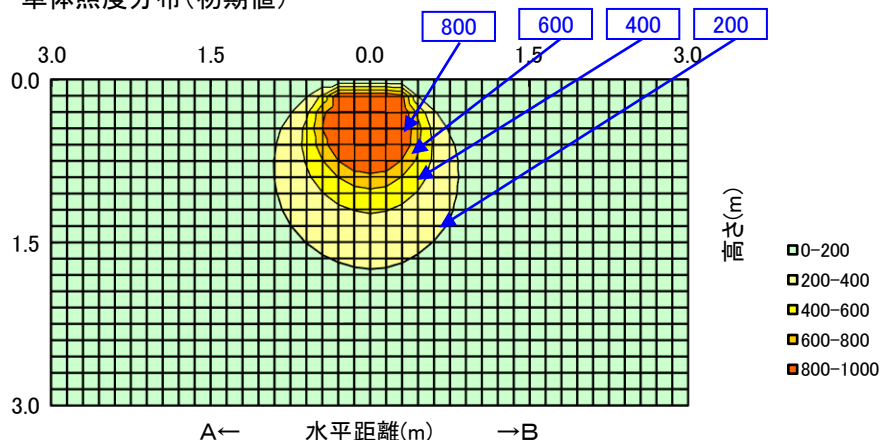

## 配光曲線 (cd/1000 lm)

