


日立照明器具 照明特性


名称: 直管形LED搭載器具	反 射 率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: WNKE4121-JM14AE2	室指数	照明率 S/H=1.0														
＜備考＞	0.6	0.51	0.39	0.32	0.50	0.39	0.31	0.26	0.37	0.31	0.26	0.36	0.30	0.26	0.23	
	0.8	0.60	0.48	0.40	0.58	0.47	0.40	0.34	0.46	0.39	0.34	0.44	0.38	0.33	0.31	
	1	0.66	0.55	0.47	0.64	0.54	0.46	0.40	0.52	0.45	0.40	0.50	0.44	0.39	0.36	
	1.25	0.71	0.61	0.53	0.69	0.60	0.52	0.47	0.57	0.51	0.46	0.55	0.50	0.45	0.42	
	1.5	0.75	0.66	0.58	0.73	0.64	0.57	0.52	0.62	0.56	0.51	0.60	0.54	0.50	0.47	
	2	0.81	0.72	0.66	0.79	0.71	0.65	0.59	0.68	0.63	0.58	0.66	0.61	0.57	0.54	
	2.5	0.84	0.77	0.71	0.82	0.75	0.70	0.65	0.73	0.68	0.63	0.70	0.66	0.62	0.59	
	3	0.86	0.80	0.74	0.84	0.78	0.73	0.68	0.76	0.71	0.67	0.73	0.69	0.66	0.62	
	4	0.90	0.84	0.79	0.88	0.83	0.78	0.74	0.80	0.76	0.72	0.77	0.74	0.71	0.67	
品名 直管形LEDランプ	5	0.92	0.87	0.83	0.90	0.86	0.82	0.78	0.83	0.79	0.76	0.80	0.77	0.74	0.71	
形式 LDK40SS-N/15/24NE	7	0.94	0.91	0.88	0.93	0.89	0.86	0.84	0.86	0.84	0.82	0.84	0.82	0.79	0.76	
光束 2,400 lm	10	0.97	0.94	0.92	0.95	0.93	0.90	0.88	0.90	0.88	0.86	0.87	0.85	0.84	0.80	

器具効率 Ft= 94.6%
 上方光束 Fu= 3.4%
 下方光束 Fd= 91.2%

最大取付間隔			
A-A	1.32	H	
B-B	1.26	H	
保守率	良	0.86	
	中	0.81	
	否	0.72	

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	261	261	261		
10	255	257	255		
20	246	241	241		
30	232	222	222		
40	210	184	197		
50	188	150	168		
60	165	112	139		
70	142	68	109		
80	119	31	86		
90	95		65		
100	25		4		
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期値)

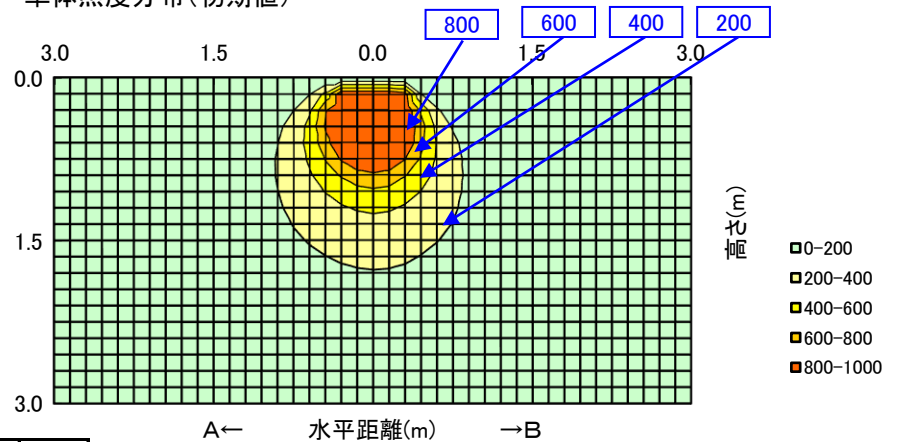

配光曲線
(cd/1000 lm)

