
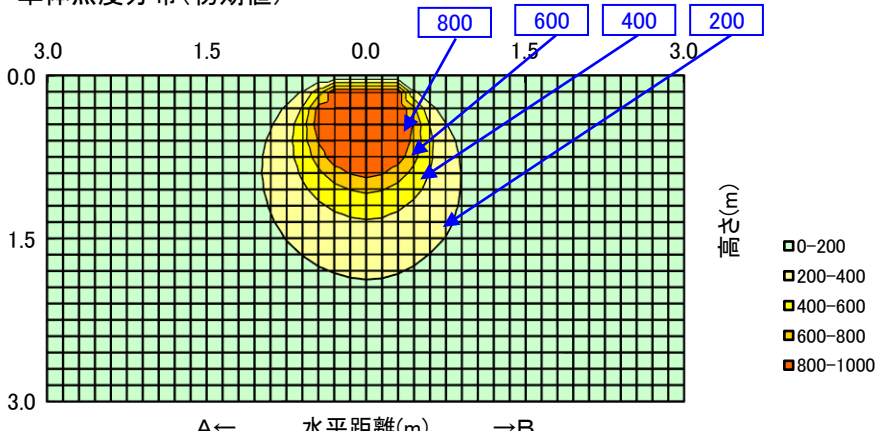
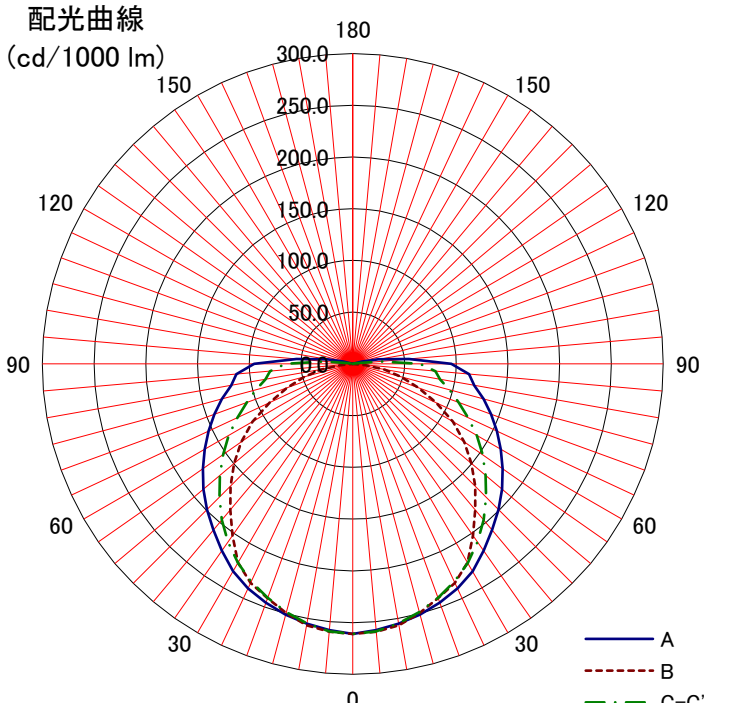


日立照明器具 照明特性																
名称: 直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
形式: WNKE4121-JM14AE2	室指数	照明率 S/H=1.0														
<備考>	0.6	0.51	0.39	0.32	0.50	0.39	0.31	0.26	0.37	0.31	0.26	0.36	0.30	0.26	0.23	
	0.8	0.60	0.48	0.40	0.58	0.47	0.40	0.34	0.46	0.39	0.34	0.44	0.38	0.33	0.31	
姿図 	1	0.66	0.55	0.47	0.64	0.54	0.46	0.40	0.52	0.45	0.40	0.50	0.44	0.39	0.36	
	1.25	0.71	0.61	0.53	0.69	0.60	0.52	0.47	0.57	0.51	0.46	0.55	0.50	0.45	0.42	
	1.5	0.75	0.66	0.58	0.73	0.64	0.57	0.52	0.62	0.56	0.51	0.60	0.54	0.50	0.47	
	2	0.81	0.72	0.66	0.79	0.71	0.65	0.59	0.68	0.63	0.58	0.66	0.61	0.57	0.54	
	2.5	0.84	0.77	0.71	0.82	0.75	0.70	0.65	0.73	0.68	0.63	0.70	0.66	0.62	0.59	
	3	0.86	0.80	0.74	0.84	0.78	0.73	0.68	0.76	0.71	0.67	0.73	0.69	0.66	0.62	
光源	4	0.90	0.84	0.79	0.88	0.83	0.78	0.74	0.80	0.76	0.72	0.77	0.74	0.71	0.67	
品名 直管形LEDランプ	5	0.92	0.87	0.83	0.90	0.86	0.82	0.78	0.83	0.79	0.76	0.80	0.77	0.74	0.71	
形式 LDK40SS・N/17/27NE	7	0.94	0.91	0.88	0.93	0.89	0.86	0.84	0.86	0.84	0.82	0.84	0.82	0.79	0.76	
光束 2,700 lm	10	0.97	0.94	0.92	0.95	0.93	0.90	0.88	0.90	0.88	0.86	0.87	0.85	0.84	0.80	
器具効率 Ft= 94.6%		単体照度分布(初期値) 														
上方光束 Fu= 3.4%																
下方光束 Fd= 91.2%																
最大取付間隔																
A-A		1.32	H													
B-B		1.26	H													
保守率	良	0.86														
	中	0.81														
	否	0.72														
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm) 														
	A-0	B-B	C-0	A'-0	C'-0											
0	261	261	261													
10	255	257	255													
20	246	241	241													
30	232	222	222													
40	210	184	197													
50	188	150	168													
60	165	112	139													
70	142	68	109													
80	119	31	86													
90	95		65													
100	25		4													
110																
120																
130																
140																
150																
160																
170																
180																