



日立照明器具 照明特性

名称: 直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: WNKE4223-JM14AE2	室指数	照明率 S/H=1.0														
〈備考〉	0.6	0.50	0.39	0.31	0.49	0.38	0.31	0.26	0.37	0.30	0.26	0.36	0.30	0.25	0.23	
	0.8	0.58	0.47	0.40	0.57	0.46	0.39	0.34	0.45	0.38	0.33	0.43	0.38	0.33	0.31	
姿図 	1	0.64	0.53	0.46	0.62	0.52	0.45	0.40	0.51	0.44	0.39	0.49	0.43	0.39	0.36	
	1.25	0.69	0.60	0.52	0.68	0.59	0.52	0.46	0.57	0.50	0.45	0.55	0.49	0.45	0.42	
	1.5	0.73	0.64	0.57	0.72	0.63	0.57	0.51	0.61	0.55	0.51	0.59	0.54	0.50	0.47	
	2	0.79	0.71	0.65	0.77	0.70	0.64	0.59	0.68	0.62	0.58	0.65	0.61	0.57	0.54	
	2.5	0.82	0.75	0.70	0.80	0.74	0.69	0.64	0.72	0.67	0.63	0.69	0.65	0.62	0.59	
	3	0.84	0.78	0.73	0.83	0.77	0.72	0.68	0.75	0.70	0.67	0.72	0.69	0.65	0.62	
光源	4	0.87	0.83	0.78	0.86	0.81	0.77	0.73	0.79	0.75	0.72	0.76	0.73	0.71	0.68	
品名 直管形LEDランプ	5	0.90	0.85	0.82	0.88	0.84	0.81	0.77	0.81	0.78	0.76	0.79	0.77	0.74	0.71	
形式 LDK40SS・D/15/23NE	7	0.92	0.89	0.86	0.91	0.88	0.85	0.82	0.85	0.83	0.81	0.83	0.81	0.79	0.76	
光束 4,660 lm	10	0.94	0.92	0.90	0.93	0.91	0.89	0.87	0.88	0.86	0.85	0.86	0.84	0.83	0.80	

器具効率 Ft= 91.3%					
上方光束 Fu= 1.9%					
下方光束 Fd= 89.3%					
最大取付間隔					
A-A		1.36 H			
B-B		1.24 H			
保守率	良	0.86			
	中	0.81			
	否	0.72			
光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	258	258	258		
10	255	255	254		
20	247	238	242		
30	234	215	225		
40	215	178	201		
50	192	145	170		
60	171	107	142		
70	148	63	118		
80	102	25	78		
90	53	1	36		
100	8	2	1		
110	1	1	1		
120	1	1	1		
130					
140					
150					
160					
170					
180					


単体照度分布 (初期値)

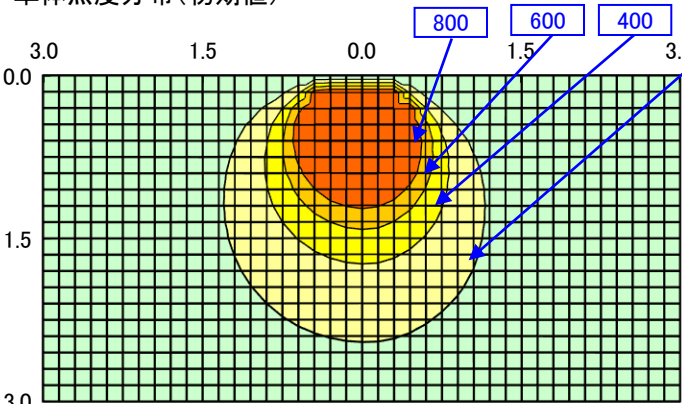

単位: lx


0-200
200-400
400-600
600-800
800-1000

配光曲線 (cd/1000 lm)

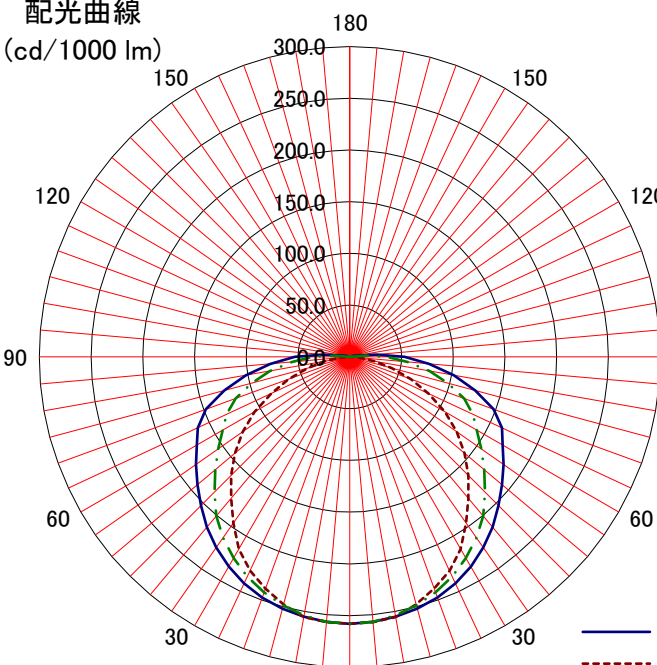

A
B
C-C'

単体照度分布(初期値)

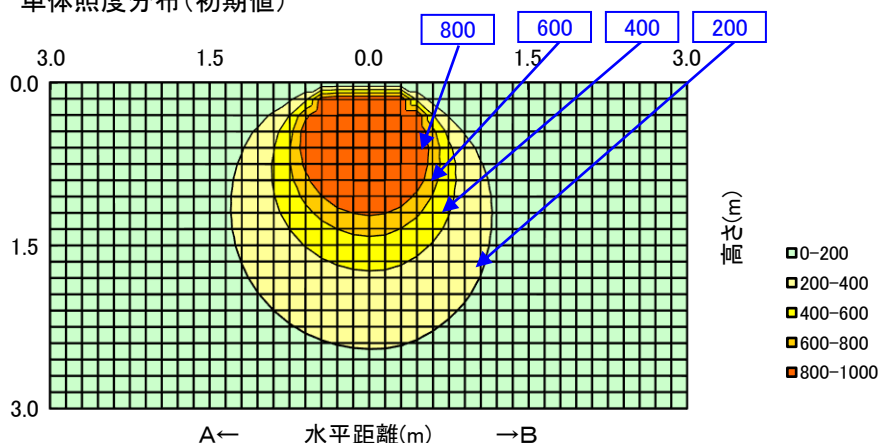

配光曲線
(cd/1000 lm)

