

日立照明器具 照明特性

形式: WNM4101-EN14		天井	80%			70%				50%			30%			0%
<定格出力形>		反射率	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		壁	10%													
		床	0%													
		室指数	照明率 S/H=1.0													
姿図 		0.6	0.37	0.27	0.21	0.36	0.27	0.21	0.17	0.25	0.20	0.16	0.23	0.19	0.15	0.13
		0.8	0.44	0.34	0.27	0.42	0.33	0.27	0.22	0.31	0.25	0.21	0.29	0.24	0.20	0.18
		1	0.48	0.39	0.32	0.46	0.38	0.31	0.27	0.35	0.30	0.25	0.33	0.28	0.24	0.21
		1.25	0.52	0.44	0.37	0.50	0.42	0.36	0.31	0.39	0.34	0.30	0.37	0.32	0.29	0.25
		1.5	0.56	0.48	0.41	0.53	0.46	0.40	0.35	0.43	0.38	0.34	0.40	0.36	0.32	0.28
		2	0.60	0.53	0.47	0.58	0.51	0.46	0.41	0.48	0.43	0.39	0.45	0.41	0.37	0.33
		2.5	0.63	0.56	0.51	0.60	0.55	0.50	0.46	0.51	0.47	0.43	0.48	0.44	0.41	0.37
		3	0.65	0.59	0.54	0.62	0.57	0.53	0.49	0.53	0.50	0.46	0.50	0.47	0.44	0.39
		4	0.67	0.63	0.59	0.65	0.61	0.57	0.53	0.57	0.54	0.51	0.53	0.51	0.48	0.43
		5	0.69	0.65	0.62	0.67	0.63	0.60	0.57	0.59	0.56	0.54	0.56	0.53	0.51	0.46
品名	蛍光ランプ	7	0.71	0.68	0.65	0.69	0.66	0.64	0.61	0.62	0.60	0.58	0.59	0.57	0.55	0.50
形式	FLR40SW(/36)	10	0.73	0.71	0.69	0.71	0.69	0.67	0.65	0.65	0.63	0.62	0.61	0.60	0.58	0.53
光束	3,000 lm															

器具効率 Ft= 74.1%

上方光束 Fu= 11.1%

下方光束 Fd= 63.0%

配光分類

BZ-

最大取付間隔

A-A 1.66 H

B-B 1.24 H

保守率

良

0.74

中

0.70


否

0.62


光度 (cd/1000 lm)

	A-0	B-B	C-0
0	133	133	133
10	136	130	131
20	140	123	127
30	144	109	125
40	145	92	122
50	148	69	119
60	144	50	110
70	135	25	96
80	125	15	80
90	118		73
100	118		78
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

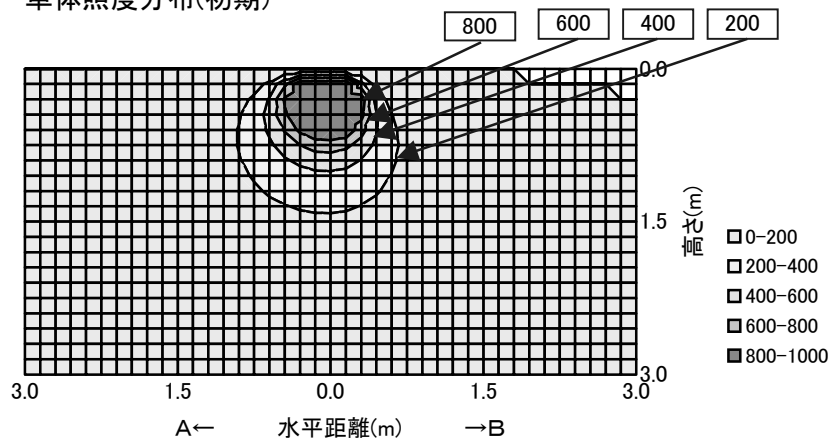

配光曲線

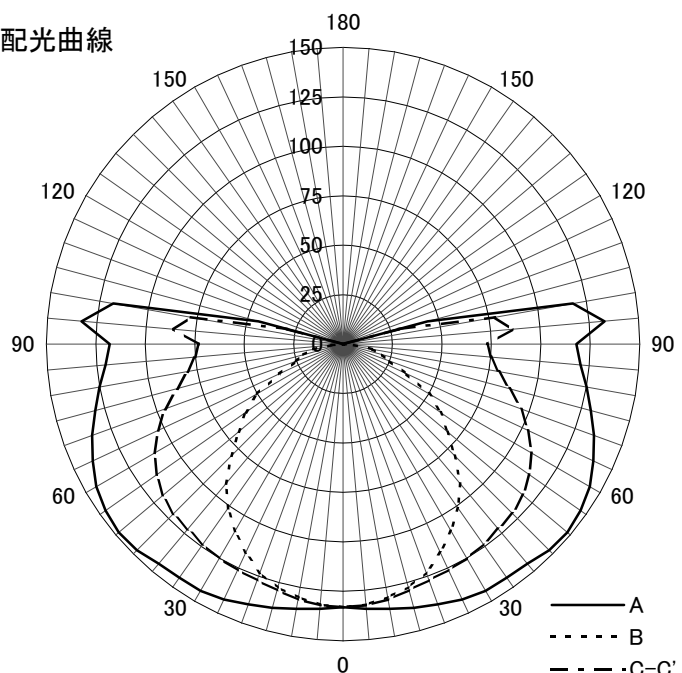

WNM4101-EN14(R0)

日立ライティング株式会社