


日立照明器具 照明特性


形式: WNM4201-EN14 ＜定格出力形＞	反射率	天井 壁 床	80%			70%				50%			30%			0%
			70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			10%													0%
			室指数 照明率 S/H=1.0													
姿図 		0.6	0.46	0.34	0.27	0.44	0.33	0.26	0.21	0.31	0.25	0.20	0.29	0.23	0.19	0.16
		0.8	0.54	0.42	0.35	0.51	0.41	0.34	0.29	0.38	0.32	0.27	0.35	0.30	0.26	0.22
		1	0.59	0.48	0.41	0.56	0.47	0.39	0.34	0.43	0.37	0.32	0.40	0.35	0.30	0.26
		1.25	0.64	0.54	0.47	0.61	0.52	0.45	0.40	0.48	0.42	0.38	0.45	0.40	0.35	0.31
		1.5	0.68	0.59	0.52	0.65	0.57	0.50	0.45	0.52	0.47	0.42	0.48	0.44	0.40	0.35
		2	0.73	0.65	0.59	0.70	0.63	0.57	0.52	0.58	0.53	0.49	0.54	0.50	0.46	0.41
		2.5	0.76	0.69	0.63	0.73	0.67	0.61	0.57	0.62	0.57	0.53	0.57	0.54	0.50	0.44
		3	0.79	0.72	0.67	0.76	0.70	0.65	0.60	0.65	0.61	0.57	0.60	0.57	0.53	0.47
		4	0.82	0.77	0.72	0.79	0.74	0.70	0.66	0.69	0.65	0.62	0.64	0.61	0.58	0.52
		5	0.84	0.80	0.76	0.81	0.77	0.73	0.70	0.72	0.68	0.66	0.66	0.64	0.62	0.55
光源																
品名	蛍光ランプ															
形式	FLR40SW(/36)															
光束	6,000 lm															
		7	0.87	0.83	0.80	0.83	0.80	0.78	0.75	0.75	0.73	0.70	0.70	0.68	0.66	0.59
		10	0.89	0.86	0.84	0.86	0.83	0.81	0.79	0.78	0.76	0.74	0.73	0.71	0.70	0.63

器具効率 Ft= 89.8%		
上方光束 Fu= 17.3%		
下方光束 Fd= 72.5%		
配光分類		
BZ-		
最大取付間隔		
A-A	1.50	H
B-B	1.26	H
保守率	良	0.74
	中	0.70
	否	0.62
光度 (cd/1000 lm)		
	A-0	B-B
0	176	176
10	174	172
20	172	162
30	170	147
40	168	126
50	159	100
60	150	71
70	148	41
80	129	14
90	83	53
100	75	44
110	64	41
120	62	43
130	57	24
140	31	7
150	7	1
160		
170		
180		

単体照度分布(初期)

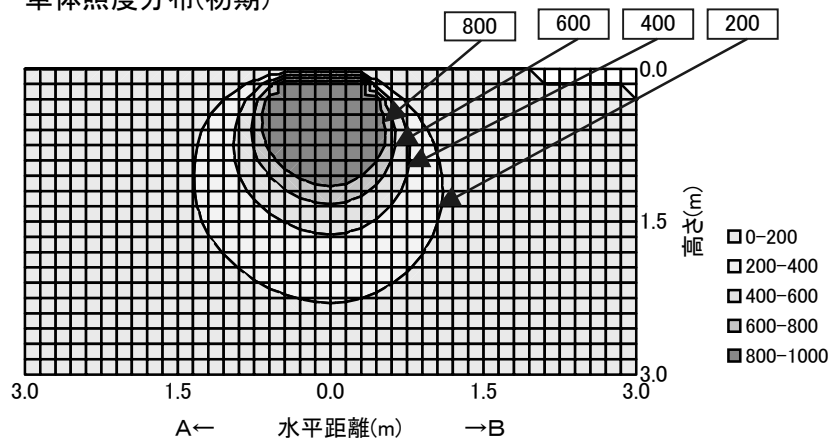

配光曲線

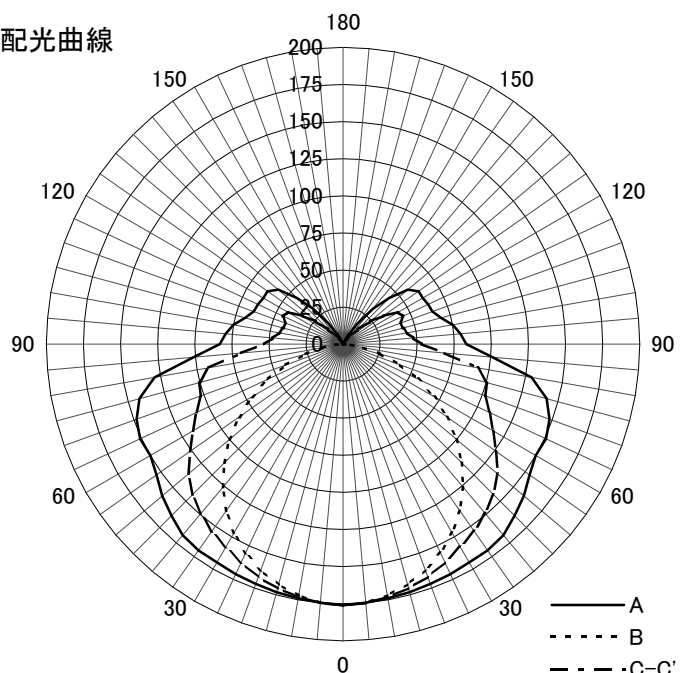

WNM4201-EN14(R0)

日立ライティング株式会社