

日立照明器具 照明特性

名称：直管形LED搭載器具		反射率	天井	80%			70%				50%			30%			0%
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
形式：WNME2101-J14AA			床	10%													
		室指数	照明率 S/H=1.0														
<備考>		0.6	0.50	0.38	0.30	0.48	0.37	0.30	0.24	0.34	0.28	0.23	0.32	0.26	0.22	0.19	
		0.8	0.58	0.47	0.39	0.56	0.45	0.38	0.32	0.42	0.36	0.31	0.39	0.34	0.29	0.26	
姿図 		1	0.64	0.53	0.45	0.61	0.51	0.44	0.38	0.48	0.41	0.36	0.44	0.39	0.34	0.30	
		1.25	0.70	0.59	0.51	0.67	0.57	0.50	0.44	0.53	0.47	0.42	0.49	0.44	0.40	0.35	
		1.5	0.74	0.64	0.57	0.71	0.62	0.55	0.50	0.58	0.52	0.47	0.54	0.49	0.45	0.40	
		2	0.79	0.71	0.64	0.76	0.69	0.62	0.57	0.64	0.59	0.54	0.59	0.55	0.51	0.46	
		2.5	0.83	0.75	0.69	0.79	0.73	0.67	0.62	0.68	0.63	0.59	0.63	0.59	0.56	0.50	
		3	0.85	0.79	0.73	0.82	0.76	0.71	0.66	0.71	0.66	0.63	0.66	0.62	0.59	0.53	
		光源	4	0.88	0.83	0.78	0.85	0.80	0.76	0.72	0.75	0.71	0.68	0.70	0.67	0.64	0.57
品名	直管形LEDランプ	5	0.90	0.86	0.82	0.87	0.83	0.79	0.76	0.78	0.74	0.72	0.72	0.70	0.67	0.61	
形式	LDK20SS-D/10/12NA	7	0.93	0.90	0.86	0.90	0.87	0.84	0.81	0.81	0.79	0.76	0.76	0.74	0.72	0.65	
光束	1,260 lm	10	0.95	0.93	0.90	0.92	0.90	0.88	0.86	0.84	0.82	0.81	0.79	0.77	0.76	0.69	

器具効率 $F_t = 96.1\%$

上方光束 $F_U = 17.2\%$

下方光束 Fd= 78.9%

最大取付間隔


A-A	1.38	H
B-B	1.24	H

保守率	良	0.86
	中	0.81
	否	0.72

光 度 (cd/1000 lm)

	A-0	B-B	C-0	A'-0	C'-0
0	212	212	212		
10	211	208	209		
20	204	193	200		
30	193	173	184		
40	184	151	166		
50	168	117	145		
60	153	89	124		
70	137	51	103		
80	116	21	82		
90	99		65		
100	83		52		
110	67		40		
120	52		35		
130	47		22		
140	23		1		
150	1		1		
160	1		1		
170	1		1		
180					

单体照度分布(初期値)

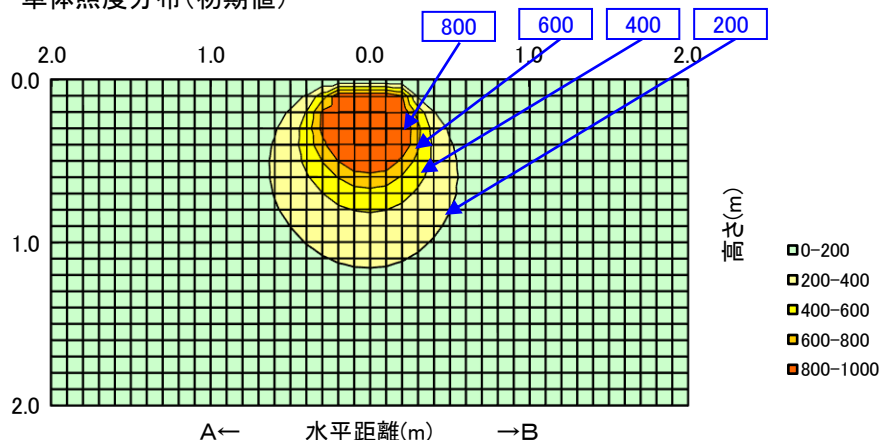

配光曲線
(cd/1000 lm)

