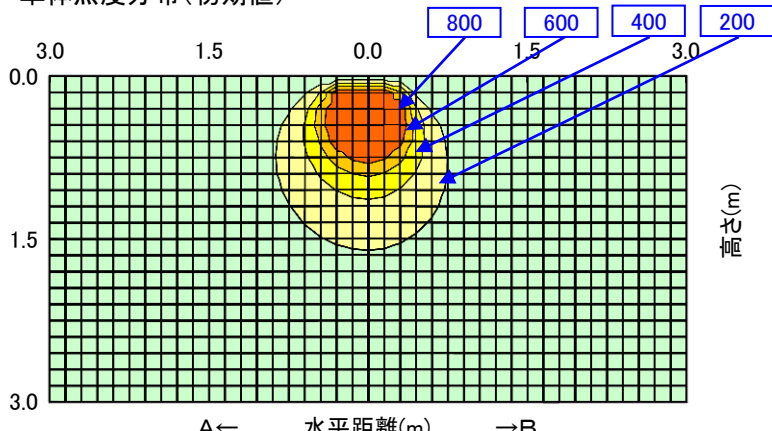
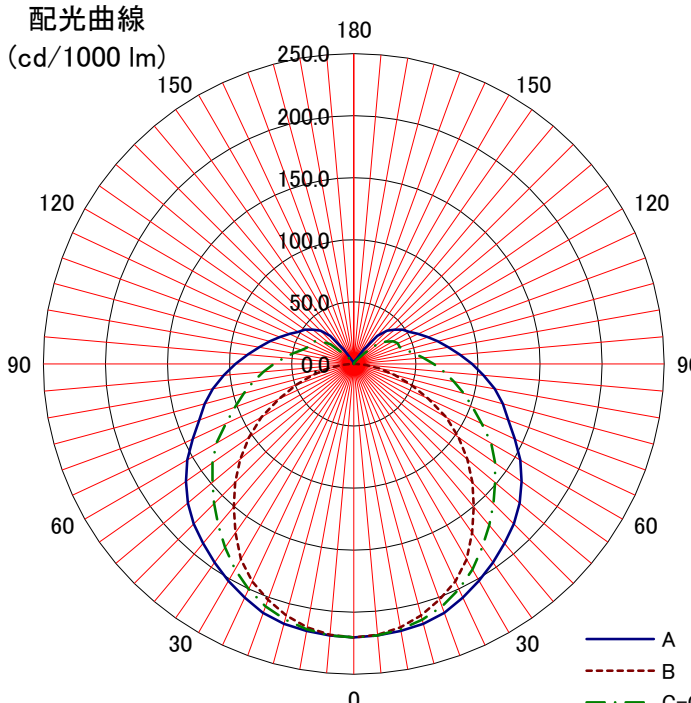


日立照明器具 照明特性

名称:直管形LED搭載器具		天井	80%			70%				50%			30%			0%			
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
				床	10%														0%
形式:WNME4101-JM14AE2		室指数		照明率 S/H=1.0															
<備考>		0.6	0.51	0.39	0.31	0.49	0.38	0.30	0.25	0.35	0.29	0.24	0.33	0.27	0.23	0.20			
		0.8	0.60	0.48	0.40	0.57	0.46	0.39	0.33	0.43	0.37	0.32	0.40	0.35	0.30	0.27			
姿図 		1	0.65	0.54	0.46	0.63	0.52	0.45	0.39	0.49	0.42	0.37	0.45	0.40	0.35	0.31			
		1.25	0.71	0.60	0.53	0.68	0.58	0.51	0.45	0.54	0.48	0.43	0.51	0.45	0.41	0.36			
		1.5	0.75	0.65	0.58	0.72	0.63	0.56	0.51	0.59	0.53	0.48	0.55	0.50	0.46	0.41			
		2	0.81	0.72	0.65	0.77	0.70	0.64	0.58	0.65	0.60	0.55	0.61	0.56	0.52	0.47			
		2.5	0.84	0.77	0.70	0.81	0.74	0.68	0.63	0.69	0.64	0.60	0.64	0.60	0.57	0.51			
		3	0.86	0.80	0.74	0.83	0.77	0.72	0.67	0.72	0.68	0.64	0.67	0.64	0.60	0.54			
光源		4	0.90	0.84	0.79	0.86	0.81	0.77	0.73	0.76	0.72	0.69	0.71	0.68	0.65	0.59			
品名	直管形LEDランプ	5	0.92	0.87	0.83	0.89	0.84	0.81	0.77	0.79	0.76	0.73	0.74	0.71	0.69	0.62			
形式	LDK40SS-D/15/23NE	7	0.94	0.91	0.88	0.91	0.88	0.85	0.82	0.83	0.80	0.78	0.77	0.75	0.73	0.66			
光束	2,330 lm	10	0.97	0.94	0.92	0.94	0.91	0.89	0.87	0.86	0.84	0.82	0.80	0.79	0.77	0.70			
器具効率 Ft= 97.3%			単体照度分布(初期値) 																
上方光束 Fu= 17.1%																			
下方光束 Fd= 80.2%																			
最大取付間隔			配光曲線 																
A-A 1.38 H																			
B-B 1.24 H																			
保守率	良	0.88																	
	中	0.86																	
	否	0.81																	
光度 (cd/1000 lm)																			
	A-0	B-B															C-0	A'-0	C'-0
0	220	220															220		
10	218	216															217		
20	214	202	208																
30	202	182	191																
40	189	150	170																
50	175	119	149																
60	155	86	128																
70	133	49	102																
80	115	21	82																
90	95	2	64																
100	77		49																
110	64		39																
120	52		37																
130	43		25																
140	30		5																
150	5		2																
160	2																		
170																			
180																			