



日立照明器具 照明特性

名称: 直管形LED搭載器具	反射率	80%			70%				50%			30%			0%
		天井	壁	床	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
形式: WNME4101-JM14AE2		10%													
室指数	照明率 S/H=1.0														
<備考>	0.6	0.51	0.39	0.31	0.49	0.38	0.30	0.25	0.35	0.29	0.24	0.33	0.27	0.23	0.20
	0.8	0.60	0.48	0.40	0.57	0.46	0.39	0.33	0.43	0.37	0.32	0.40	0.35	0.30	0.27
姿図 	1	0.65	0.54	0.46	0.63	0.52	0.45	0.39	0.49	0.42	0.37	0.45	0.40	0.35	0.31
	1.25	0.71	0.60	0.53	0.68	0.58	0.51	0.45	0.54	0.48	0.43	0.51	0.45	0.41	0.36
	1.5	0.75	0.65	0.58	0.72	0.63	0.56	0.51	0.59	0.53	0.48	0.55	0.50	0.46	0.41
	2	0.81	0.72	0.65	0.77	0.70	0.64	0.58	0.65	0.60	0.55	0.61	0.56	0.52	0.47
	2.5	0.84	0.77	0.70	0.81	0.74	0.68	0.63	0.69	0.64	0.60	0.64	0.60	0.57	0.51
	3	0.86	0.80	0.74	0.83	0.77	0.72	0.67	0.72	0.68	0.64	0.67	0.64	0.60	0.54
光源	4	0.90	0.84	0.79	0.86	0.81	0.77	0.73	0.76	0.72	0.69	0.71	0.68	0.65	0.59
品名 直管形LEDランプ	5	0.92	0.87	0.83	0.89	0.84	0.81	0.77	0.79	0.76	0.73	0.74	0.71	0.69	0.62
形式 LDK40SS-N/15/24NE	7	0.94	0.91	0.88	0.91	0.88	0.85	0.82	0.83	0.80	0.78	0.77	0.75	0.73	0.66
光束 2,400 lm	10	0.97	0.94	0.92	0.94	0.91	0.89	0.87	0.86	0.84	0.82	0.80	0.79	0.77	0.70
器具効率 Ft= 97.3%															
上方光束 Fu= 17.1%															
下方光束 Fd= 80.2%															
最大取付間隔															
A-A		1.38		H											
B-B		1.24		H											
保守率	良	0.88													
	中	0.86													
	否	0.81													
光度 (cd/1000 lm)															
	A-0	B-B	C-0	A'-0	C'-0										
0	220	220	220												
10	218	216	217												
20	214	202	208												
30	202	182	191												
40	189	150	170												
50	175	119	149												
60	155	86	128												
70	133	49	102												
80	115	21	82												
90	95	2	64												
100	77		49												
110	64		39												
120	52		37												
130	43		25												
140	30		5												
150	5		2												
160	2														
170															
180															

単体照度分布(初期値)

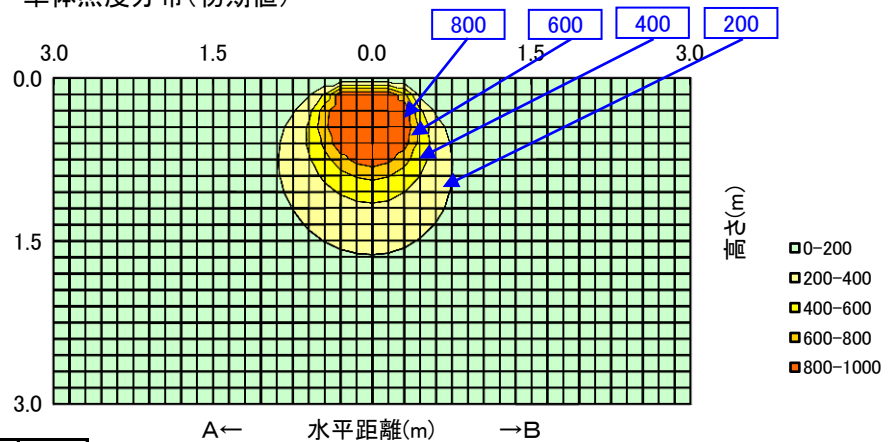

配光曲線 (cd/1000 lm)

