


## 日立照明器具 照明特性


名称: 直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
	床	10%														0%
形式: WNME4101-JM14AE2	室指数	照明率 S/H=1.0														
<備考>	0.6	0.51	0.39	0.31	0.49	0.38	0.30	0.25	0.35	0.29	0.24	0.33	0.27	0.23	0.20	
	0.8	0.60	0.48	0.40	0.57	0.46	0.39	0.33	0.43	0.37	0.32	0.40	0.35	0.30	0.27	
姿図 	1	0.65	0.54	0.46	0.63	0.52	0.45	0.39	0.49	0.42	0.37	0.45	0.40	0.35	0.31	
	1.25	0.71	0.60	0.53	0.68	0.58	0.51	0.45	0.54	0.48	0.43	0.51	0.45	0.41	0.36	
	1.5	0.75	0.65	0.58	0.72	0.63	0.56	0.51	0.59	0.53	0.48	0.55	0.50	0.46	0.41	
	2	0.81	0.72	0.65	0.77	0.70	0.64	0.58	0.65	0.60	0.55	0.61	0.56	0.52	0.47	
	2.5	0.84	0.77	0.70	0.81	0.74	0.68	0.63	0.69	0.64	0.60	0.64	0.60	0.57	0.51	
	3	0.86	0.80	0.74	0.83	0.77	0.72	0.67	0.72	0.68	0.64	0.67	0.64	0.60	0.54	
	4	0.90	0.84	0.79	0.86	0.81	0.77	0.73	0.76	0.72	0.69	0.71	0.68	0.65	0.59	
光源	5	0.92	0.87	0.83	0.89	0.84	0.81	0.77	0.79	0.76	0.73	0.74	0.71	0.69	0.62	
品名 直管形LEDランプ	形式 LDK40SS-N/17/27NE	7	0.94	0.91	0.88	0.91	0.88	0.85	0.82	0.83	0.80	0.78	0.77	0.75	0.73	0.66
光束 2,700 lm	10	0.97	0.94	0.92	0.94	0.91	0.89	0.87	0.86	0.84	0.82	0.80	0.79	0.77	0.70	

器具効率 Ft= 97.3%  
 上方光束 Fu= 17.1%  
 下方光束 Fd= 80.2%

最大取付間隔		
A-A	1.38	H
B-B	1.24	H
保守率	良	0.88
	中	0.86
	否	0.81

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	220	220	220		
10	218	216	217		
20	214	202	208		
30	202	182	191		
40	189	150	170		
50	175	119	149		
60	155	86	128		
70	133	49	102		
80	115	21	82		
90	95	2	64		
100	77		49		
110	64		39		
120	52		37		
130	43		25		
140	30		5		
150	5		2		
160	2				
170					
180					

単体照度分布(初期値)

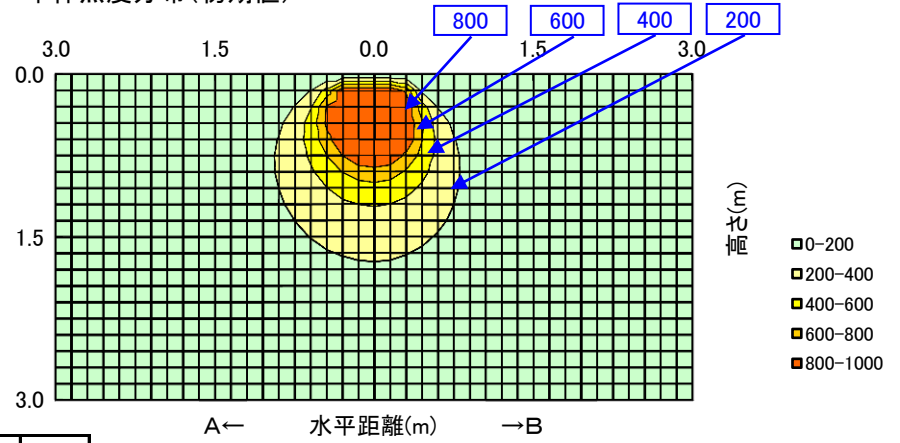

配光曲線 (cd/1000 lm)

