

日立照明器具 照明特性

名称: 直管形LED搭載器具		反 射 率	天井	80%			70%				50%			30%			0%
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
形式: WNME4201-JM14AE2			床	10%													
		室指数	照明率 S/H=1.0														
<備考>		0.6	0.50	0.38	0.31	0.48	0.37	0.30	0.25	0.35	0.29	0.24	0.33	0.27	0.23	0.20	
		0.8	0.59	0.47	0.39	0.56	0.46	0.38	0.33	0.43	0.36	0.31	0.40	0.35	0.30	0.27	
姿図 		1	0.65	0.53	0.45	0.62	0.52	0.44	0.39	0.48	0.42	0.37	0.45	0.40	0.35	0.32	
		1.25	0.70	0.60	0.52	0.67	0.58	0.51	0.45	0.54	0.48	0.43	0.51	0.45	0.41	0.37	
		1.5	0.74	0.65	0.57	0.71	0.63	0.56	0.50	0.59	0.53	0.48	0.55	0.50	0.46	0.41	
		2	0.80	0.71	0.65	0.77	0.69	0.63	0.58	0.65	0.60	0.55	0.61	0.56	0.53	0.47	
		2.5	0.83	0.76	0.70	0.80	0.73	0.68	0.63	0.69	0.64	0.60	0.64	0.61	0.57	0.52	
		3	0.85	0.79	0.73	0.82	0.76	0.71	0.67	0.72	0.67	0.64	0.67	0.64	0.60	0.55	
		4	0.89	0.83	0.79	0.86	0.81	0.76	0.72	0.76	0.72	0.69	0.71	0.68	0.65	0.59	
光源		5	0.91	0.86	0.82	0.88	0.84	0.80	0.77	0.79	0.76	0.73	0.74	0.71	0.69	0.63	
品名	直管形LEDランプ	7	0.93	0.90	0.87	0.90	0.87	0.84	0.82	0.82	0.80	0.78	0.77	0.75	0.74	0.67	
形式	LDK40SS-N/15/24NE	10	0.96	0.93	0.91	0.93	0.90	0.88	0.86	0.85	0.84	0.82	0.80	0.79	0.78	0.71	
光束	4,800 lm																


器具効率 Ft= 95.6%
 上方光束 Fu= 14.8%
 下方光束 Fd= 80.8%

最大取付間隔		
A-A	1.38	H
B-B	1.22	H
保守率	良	0.88
	中	0.86
	否	0.81

光度 (cd/1000 lm)

	A-0	B-B	C-0	A'-0	C'-0
0	221	221	221		
10	219	216	218		
20	214	204	209		
30	204	182	193		
40	190	152	172		
50	176	124	152		
60	157	89	127		
70	139	51	104		
80	123	20	87		
90	76	1	50		
100	67		40		
110	54		34		
120	44		28		
130	35		23		
140	29		16		
150	16		1		
160					
170					
180					

単体照度分布(初期値)

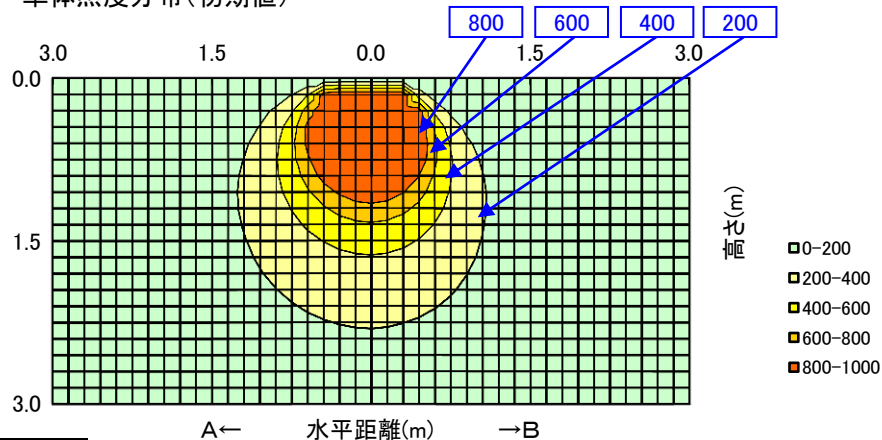

配光曲線
(cd/1000 lm)

