

日立照明器具 照明特性


名称:直管形LED搭載器具		反 射 率	天井	80%			70%				50%			30%			0%
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
形式:WPKE11161-J24AC			床	10%													
		室指数	照明率 S/H=1.0														
＜備考＞		0.6	0.53	0.41	0.33	0.52	0.40	0.33	0.27	0.39	0.32	0.27	0.38	0.32	0.27	0.25	
		0.8	0.62	0.50	0.42	0.61	0.50	0.42	0.36	0.48	0.41	0.36	0.47	0.41	0.36	0.34	
姿図 		1	0.69	0.57	0.49	0.67	0.56	0.49	0.43	0.55	0.48	0.43	0.53	0.47	0.42	0.40	
		1.25	0.75	0.64	0.56	0.73	0.63	0.56	0.50	0.61	0.55	0.50	0.60	0.54	0.49	0.47	
		1.5	0.79	0.70	0.62	0.77	0.69	0.62	0.56	0.67	0.61	0.56	0.65	0.59	0.55	0.53	
		2	0.85	0.77	0.70	0.83	0.76	0.70	0.65	0.74	0.68	0.64	0.72	0.67	0.63	0.61	
		2.5	0.89	0.82	0.76	0.87	0.80	0.75	0.70	0.78	0.74	0.69	0.76	0.72	0.69	0.66	
		3	0.91	0.85	0.80	0.89	0.84	0.79	0.75	0.82	0.77	0.74	0.79	0.76	0.73	0.70	
		4	0.94	0.89	0.85	0.93	0.88	0.84	0.81	0.86	0.83	0.79	0.84	0.81	0.78	0.75	
品名	直管形LEDランプ	5	0.97	0.92	0.89	0.95	0.91	0.88	0.85	0.89	0.86	0.83	0.87	0.84	0.82	0.79	
形式	LDK110S-N/42/69NC	7	0.99	0.96	0.93	0.98	0.95	0.92	0.90	0.93	0.91	0.89	0.91	0.89	0.87	0.84	
光束	6,900 lm	10	1.01	0.99	0.97	1.00	0.98	0.96	0.94	0.96	0.94	0.93	0.94	0.92	0.91	0.88	

器具効率 $F_t = 97.0\%$
 上方光束 $F_u = 0.0\%$
 下方光束 $F_d = 97.0\%$

最大取付間隔		
A-A	1.44	H
B-B	1.30	H
保守率	良	0.86
	中	0.81
	否	0.72

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	267	267	267		
10	264	265	265		
20	260	252	257		
30	253	231	240		
40	245	207	220		
50	235	180	194		
60	201	151	164		
70	121	120	129		
80	42	55	83		
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布 (初期値)

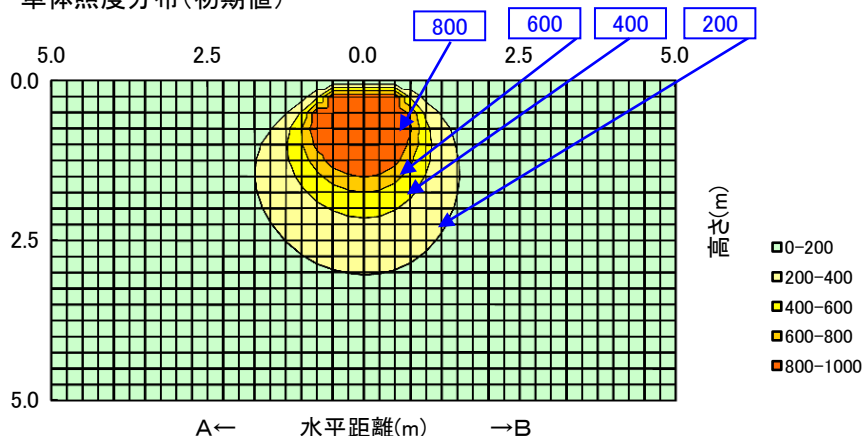

配光曲線
(cd/1000 lm)

