

日立照明器具 照明特性


名称:直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式:WPKE11261-J24AC	室指数	照明率 S/H=1.0														
	<備考>	0.6	0.53	0.41	0.34	0.52	0.41	0.33	0.28	0.40	0.33	0.28	0.39	0.33	0.28	0.26
	0.8	0.62	0.50	0.43	0.60	0.50	0.42	0.37	0.48	0.42	0.37	0.47	0.41	0.36	0.34	
	姿図	1	0.68	0.57	0.49	0.66	0.56	0.49	0.43	0.55	0.48	0.43	0.53	0.47	0.43	0.41
	1.25	0.73	0.64	0.56	0.72	0.63	0.56	0.50	0.61	0.55	0.50	0.59	0.54	0.49	0.47	
	1.5	0.78	0.69	0.62	0.76	0.68	0.61	0.56	0.66	0.60	0.55	0.64	0.59	0.55	0.52	
	2	0.83	0.76	0.69	0.82	0.75	0.69	0.64	0.72	0.67	0.63	0.70	0.66	0.62	0.60	
	2.5	0.87	0.80	0.74	0.85	0.79	0.74	0.69	0.77	0.72	0.68	0.75	0.71	0.67	0.65	
	3	0.89	0.83	0.78	0.87	0.82	0.77	0.73	0.80	0.76	0.72	0.78	0.74	0.71	0.69	
	光源	4	0.92	0.87	0.83	0.91	0.86	0.82	0.79	0.84	0.81	0.78	0.82	0.79	0.76	0.74
品名:直管形LEDランプ°	5	0.94	0.90	0.87	0.93	0.89	0.86	0.83	0.87	0.84	0.81	0.85	0.82	0.80	0.77	
形式:LDK110S-N/42/69NC	7	0.97	0.94	0.91	0.95	0.93	0.90	0.88	0.90	0.88	0.86	0.88	0.86	0.85	0.82	
光束:13,800 lm	10	0.99	0.97	0.95	0.97	0.95	0.94	0.92	0.93	0.92	0.90	0.91	0.90	0.89	0.86	

器具効率 $F_t = 94.5\%$
 上方光束 $F_u = 0.2\%$
 下方光束 $F_d = 94.4\%$

最大取付間隔		
A-A	1.32	H
B-B	1.26	H
保守率	良	0.86
	中	0.81
	否	0.72

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	289	289	289		
10	287	284	286		
20	274	269	273		
30	255	243	248		
40	232	209	221		
50	203	170	186		
60	174	127	151		
70	141	80	117		
80	81	32	77		
90	4	3	4		
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布 (初期値)

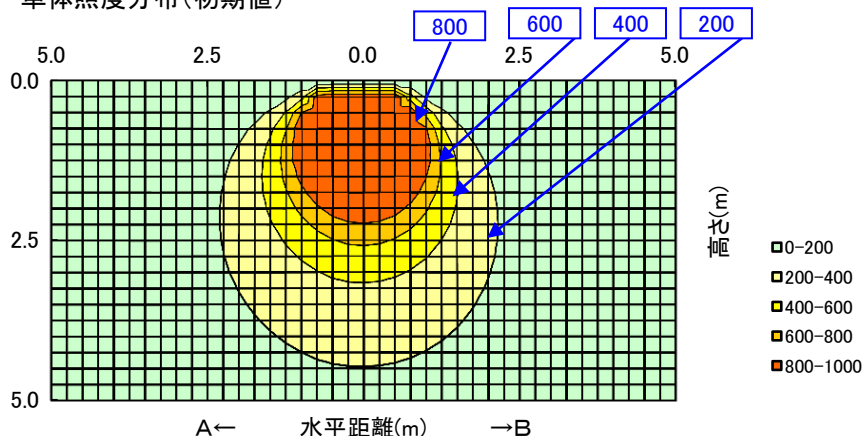

配光曲線
(cd/1000 lm)

