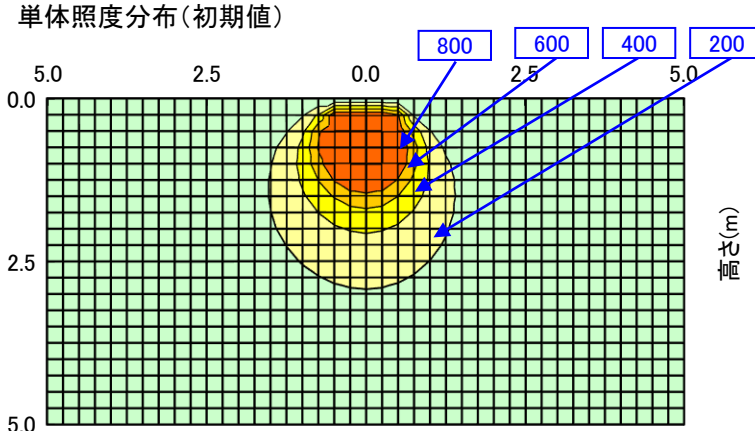
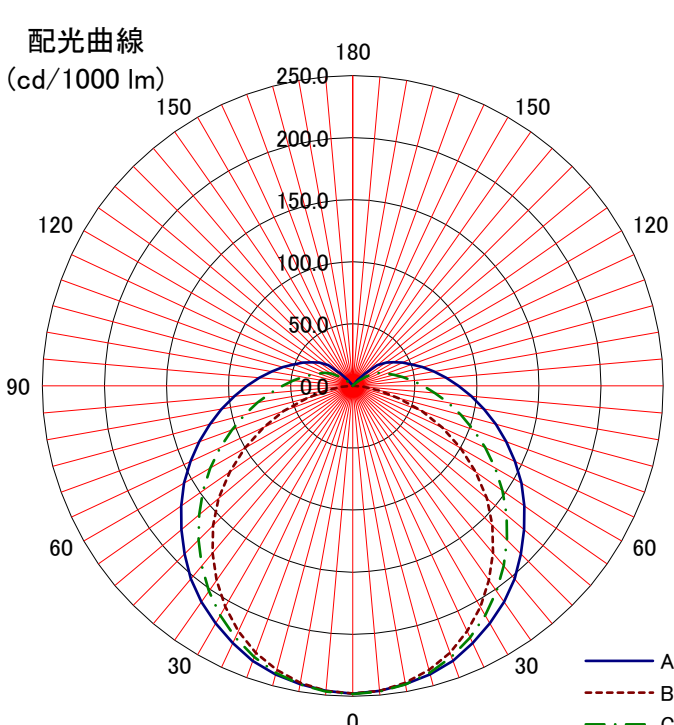


日立照明器具 照明特性																																																																																																																																								
名称: 直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%																																																																																																																								
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																								
		床	10%														0%																																																																																																																							
形式: WPME11161-J24AC	室指数	照明率 S/H=1.0																																																																																																																																						
<備考>	0.6	0.52	0.40	0.33	0.50	0.39	0.32	0.27	0.37	0.31	0.26	0.35	0.29	0.25	0.22																																																																																																																									
	0.8	0.61	0.49	0.41	0.59	0.48	0.41	0.35	0.45	0.39	0.34	0.43	0.37	0.33	0.30																																																																																																																									
姿図 	1	0.67	0.56	0.48	0.65	0.54	0.47	0.41	0.51	0.45	0.40	0.49	0.43	0.38	0.35																																																																																																																									
	1.25	0.73	0.62	0.55	0.70	0.61	0.53	0.48	0.57	0.51	0.46	0.54	0.49	0.44	0.40																																																																																																																									
	1.5	0.77	0.67	0.60	0.74	0.65	0.59	0.53	0.62	0.56	0.51	0.58	0.53	0.49	0.45																																																																																																																									
	2	0.82	0.74	0.68	0.80	0.72	0.66	0.61	0.68	0.63	0.59	0.64	0.60	0.56	0.52																																																																																																																									
	2.5	0.86	0.79	0.73	0.83	0.77	0.71	0.66	0.72	0.68	0.63	0.68	0.64	0.61	0.56																																																																																																																									
	3	0.88	0.82	0.76	0.85	0.80	0.74	0.70	0.75	0.71	0.67	0.71	0.68	0.64	0.59																																																																																																																									
	4	0.92	0.86	0.81	0.89	0.84	0.80	0.76	0.79	0.76	0.72	0.75	0.72	0.69	0.64																																																																																																																									
光源	5	0.94	0.89	0.85	0.91	0.87	0.83	0.80	0.82	0.79	0.76	0.78	0.75	0.73	0.67																																																																																																																									
品名 直管形LEDランプ	7	0.96	0.93	0.90	0.94	0.91	0.88	0.85	0.86	0.83	0.81	0.81	0.80	0.78	0.72																																																																																																																									
形式 LDK110S・N/42/69NC	10	0.98	0.96	0.94	0.96	0.94	0.91	0.89	0.89	0.87	0.85	0.84	0.83	0.82	0.76																																																																																																																									
光束 6,900 lm																																																																																																																																								
器具効率 Ft= 97.7%		単体照度分布(初期値) 																																																																																																																																						
上方光束 Fu= 12.2%																																																																																																																																								
下方光束 Fd= 85.6%																																																																																																																																								
最大取付間隔		配光曲線 																																																																																																																																						
A-A 1.34 H																																																																																																																																								
B-B 1.24 H																																																																																																																																								
保守率																																																																																																																																								
良	0.88																																																																																																																																							
中	0.86																																																																																																																																							
否	0.81																																																																																																																																							
光度 (cd/1000 lm)		<table><tr><th></th><th>A-0</th><th>B-B</th><th>C-0</th><th>A'-0</th><th>C'-0</th></tr><tr><td>0</td><td>248</td><td>248</td><td>248</td><td></td><td></td></tr><tr><td>10</td><td>244</td><td>243</td><td>244</td><td></td><td></td></tr><tr><td>20</td><td>236</td><td>229</td><td>232</td><td></td><td></td></tr><tr><td>30</td><td>221</td><td>205</td><td>213</td><td></td><td></td></tr><tr><td>40</td><td>203</td><td>176</td><td>189</td><td></td><td></td></tr><tr><td>50</td><td>180</td><td>141</td><td>162</td><td></td><td></td></tr><tr><td>60</td><td>157</td><td>100</td><td>133</td><td></td><td></td></tr><tr><td>70</td><td>132</td><td>59</td><td>104</td><td></td><td></td></tr><tr><td>80</td><td>107</td><td>22</td><td>78</td><td></td><td></td></tr><tr><td>90</td><td>85</td><td>1</td><td>57</td><td></td><td></td></tr><tr><td>100</td><td>67</td><td>0</td><td>41</td><td></td><td></td></tr><tr><td>110</td><td>51</td><td></td><td>29</td><td></td><td></td></tr><tr><td>120</td><td>38</td><td></td><td>20</td><td></td><td></td></tr><tr><td>130</td><td>26</td><td></td><td>7</td><td></td><td></td></tr><tr><td>140</td><td>6</td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td>0</td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></table>																A-0	B-B	C-0	A'-0	C'-0	0	248	248	248			10	244	243	244			20	236	229	232			30	221	205	213			40	203	176	189			50	180	141	162			60	157	100	133			70	132	59	104			80	107	22	78			90	85	1	57			100	67	0	41			110	51		29			120	38		20			130	26		7			140	6					150	0					160						170						180					
	A-0	B-B	C-0	A'-0	C'-0																																																																																																																																			
0	248	248	248																																																																																																																																					
10	244	243	244																																																																																																																																					
20	236	229	232																																																																																																																																					
30	221	205	213																																																																																																																																					
40	203	176	189																																																																																																																																					
50	180	141	162																																																																																																																																					
60	157	100	133																																																																																																																																					
70	132	59	104																																																																																																																																					
80	107	22	78																																																																																																																																					
90	85	1	57																																																																																																																																					
100	67	0	41																																																																																																																																					
110	51		29																																																																																																																																					
120	38		20																																																																																																																																					
130	26		7																																																																																																																																					
140	6																																																																																																																																							
150	0																																																																																																																																							
160																																																																																																																																								
170																																																																																																																																								
180																																																																																																																																								