

日立照明器具 照明特性


名称: 直管形LED搭載器具	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
形式: WPME4121-JM14AE2	床	10%														0%
	室指数	照明率 S/H=1.0														
<備考>	0.6	0.50	0.39	0.31	0.48	0.37	0.30	0.25	0.35	0.29	0.24	0.33	0.27	0.23	0.20	
	0.8	0.59	0.47	0.39	0.57	0.46	0.38	0.33	0.43	0.36	0.32	0.40	0.35	0.30	0.27	
	1	0.65	0.54	0.46	0.62	0.52	0.45	0.39	0.49	0.42	0.37	0.45	0.40	0.36	0.32	
	1.25	0.70	0.60	0.52	0.67	0.58	0.51	0.45	0.54	0.48	0.43	0.51	0.45	0.41	0.37	
	1.5	0.74	0.65	0.57	0.71	0.63	0.56	0.50	0.59	0.53	0.48	0.55	0.50	0.46	0.41	
	2	0.80	0.72	0.65	0.77	0.69	0.63	0.58	0.65	0.60	0.55	0.61	0.56	0.52	0.47	
	2.5	0.83	0.76	0.70	0.80	0.73	0.68	0.63	0.69	0.64	0.60	0.64	0.60	0.57	0.51	
	3	0.85	0.79	0.73	0.82	0.76	0.71	0.67	0.72	0.67	0.64	0.67	0.64	0.60	0.54	
光源	4	0.89	0.83	0.79	0.86	0.81	0.76	0.72	0.76	0.72	0.69	0.71	0.68	0.65	0.59	
品名 直管形LEDランプ	5	0.91	0.86	0.82	0.88	0.84	0.80	0.76	0.79	0.75	0.72	0.74	0.71	0.69	0.62	
形式 LDK40SS-D/17/26NE	7	0.93	0.90	0.87	0.90	0.87	0.84	0.82	0.82	0.80	0.77	0.77	0.75	0.73	0.67	
光束 2,620 lm	10	0.96	0.93	0.91	0.93	0.90	0.88	0.86	0.85	0.83	0.82	0.80	0.79	0.77	0.71	

器具効率 Ft= 95.9%
 上方光束 Fu= 15.3%
 下方光束 Fd= 80.5%

最大取付間隔		
A-A	1.36	H
B-B	1.24	H
保守率	良	0.88
	中	0.86
	否	0.81

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	223	223	223		
10	220	220	219		
20	215	207	211		
30	203	185	194		
40	188	155	171		
50	173	121	150		
60	155	87	126		
70	135	50	103		
80	113	21	82		
90	94		63		
100	76		48		
110	62		39		
120	49		29		
130	36		14		
140	18				
150					
160					
170					
180					

単体照度分布(初期値)

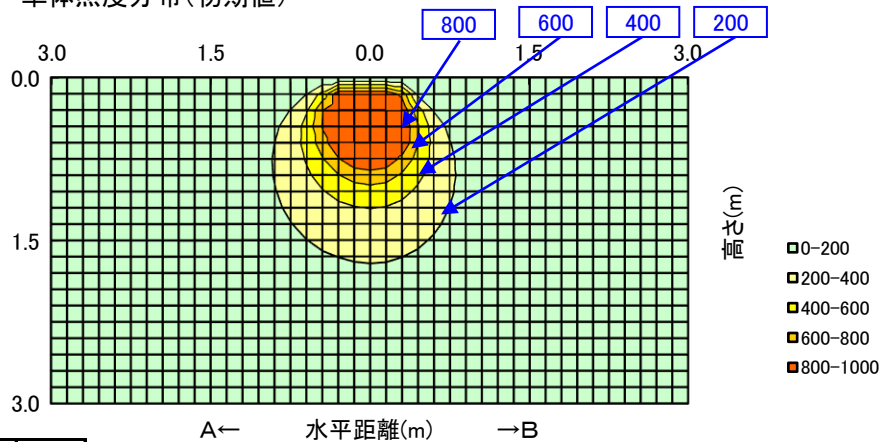

配光曲線 (cd/1000 lm)

