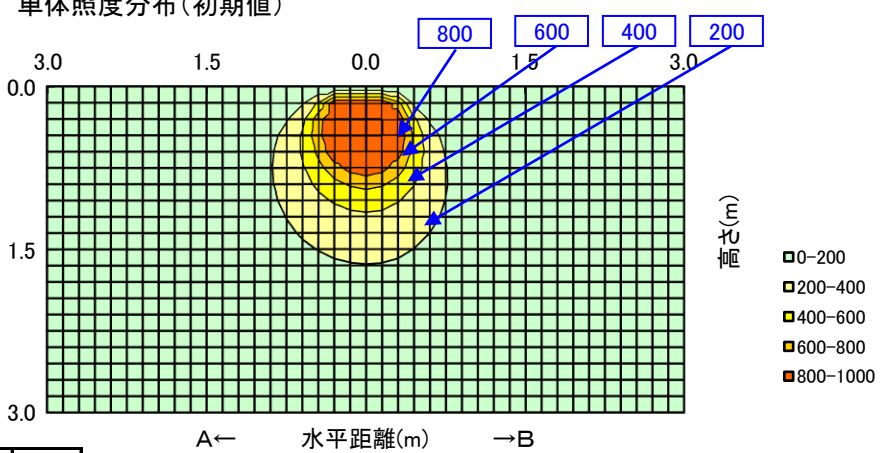
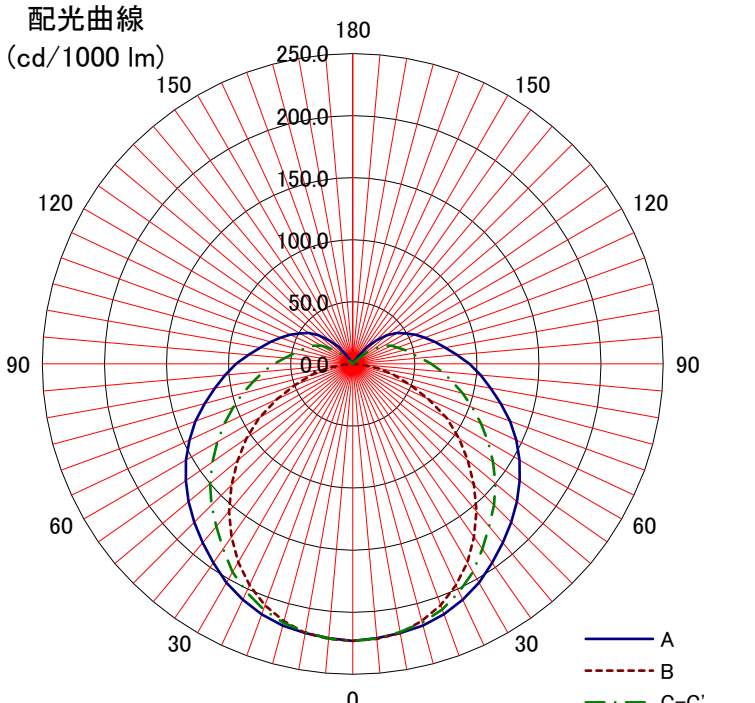


日立照明器具 照明特性																
名称: 直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
形式: WPME4121-JM14AE2	室指数	照明率 S/H=1.0														
〈備考〉	0.6	0.50	0.39	0.31	0.48	0.37	0.30	0.25	0.35	0.29	0.24	0.33	0.27	0.23	0.20	
	0.8	0.59	0.47	0.39	0.57	0.46	0.38	0.33	0.43	0.36	0.32	0.40	0.35	0.30	0.27	
姿図 	1	0.65	0.54	0.46	0.62	0.52	0.45	0.39	0.49	0.42	0.37	0.45	0.40	0.36	0.32	
	1.25	0.70	0.60	0.52	0.67	0.58	0.51	0.45	0.54	0.48	0.43	0.51	0.45	0.41	0.37	
	1.5	0.74	0.65	0.57	0.71	0.63	0.56	0.50	0.59	0.53	0.48	0.55	0.50	0.46	0.41	
	2	0.80	0.72	0.65	0.77	0.69	0.63	0.58	0.65	0.60	0.55	0.61	0.56	0.52	0.47	
	2.5	0.83	0.76	0.70	0.80	0.73	0.68	0.63	0.69	0.64	0.60	0.64	0.60	0.57	0.51	
	3	0.85	0.79	0.73	0.82	0.76	0.71	0.67	0.72	0.67	0.64	0.67	0.64	0.60	0.54	
	4	0.89	0.83	0.79	0.86	0.81	0.76	0.72	0.76	0.72	0.69	0.71	0.68	0.65	0.59	
光源	5	0.91	0.86	0.82	0.88	0.84	0.80	0.76	0.79	0.75	0.72	0.74	0.71	0.69	0.62	
品名 直管形LEDランプ	7	0.93	0.90	0.87	0.90	0.87	0.84	0.82	0.82	0.80	0.77	0.77	0.75	0.73	0.67	
形式 LDK40SS・N/15/24NE	10	0.96	0.93	0.91	0.93	0.90	0.88	0.86	0.85	0.83	0.82	0.80	0.79	0.77	0.71	
光束 2,400 lm																
器具効率 Ft= 95.9%		単体照度分布(初期値) 														
上方光束 Fu= 15.3%																
下方光束 Fd= 80.5%																
最大取付間隔		配光曲線 (cd/1000 lm) 														
A-A 1.36 H																
B-B 1.24 H																
保守率																
良	0.88															
中	0.86															
否	0.81															
光度 (cd/1000 lm)		器具効率 Ft= 95.9% 上方光束 Fu= 15.3% 下方光束 Fd= 80.5% 最大取付間隔 A-A 1.36 H B-B 1.24 H 保守率 良 0.88 中 0.86 否 0.81 光度 (cd/1000 lm)														
A-0																
B-B																
C-0																
0	223	223	223	A'-0	C'-0											
10	220	220	219													
20	215	207	211													
30	203	185	194													
40	188	155	171													
50	173	121	150													
60	155	87	126													
70	135	50	103													
80	113	21	82													
90	94		63													
100	76		48													
110	62		39													
120	49		29													
130	36		14													
140	18															
150																
160																
170																
180																