



日立照明器具 照明特性

名称: 高天井用LEDランプ (アームタイプ)	反 射 率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: WSBME1101MNC	室指数	固有照明率 S/H=1.0														
＜備考＞ 	0.6	0.62	0.51	0.44	0.61	0.51	0.44	0.39	0.50	0.43	0.39	0.49	0.43	0.39	0.37	
	0.8	0.72	0.62	0.55	0.71	0.62	0.55	0.50	0.60	0.55	0.50	0.59	0.54	0.50	0.48	
	1	0.79	0.70	0.63	0.78	0.69	0.63	0.58	0.68	0.62	0.58	0.66	0.62	0.58	0.56	
	1.25	0.85	0.77	0.71	0.83	0.76	0.70	0.66	0.74	0.69	0.65	0.73	0.68	0.65	0.63	
	1.5	0.89	0.82	0.76	0.88	0.81	0.76	0.72	0.79	0.75	0.71	0.78	0.74	0.71	0.68	
	2	0.94	0.88	0.84	0.93	0.87	0.83	0.80	0.86	0.82	0.79	0.84	0.81	0.78	0.76	
	2.5	0.97	0.92	0.88	0.95	0.91	0.87	0.84	0.89	0.86	0.83	0.87	0.85	0.82	0.80	
	3	0.99	0.94	0.91	0.97	0.93	0.90	0.87	0.91	0.89	0.86	0.90	0.87	0.85	0.83	
	4	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.92	0.90	0.93	0.91	0.89	0.86	
	5	1.03	1.00	0.98	1.01	0.99	0.97	0.95	0.97	0.95	0.93	0.95	0.93	0.92	0.89	
光源形式	7	1.05	1.03	1.01	1.03	1.02	1.00	0.99	1.00	0.98	0.97	0.98	0.97	0.96	0.93	
器具光束 10,000 lm	10	1.06	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.99	0.96	

器具効率 Ft= 100%					
上方光束 Fu= 0%					
下方光束 Fd= 100%					
最大取付間隔					
A-A		1.46 H			
B-B		H			
保守率	良	0.81			
	中	0.79			
	否	0.75			
光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	377				
10	377				
20	380				
30	374				
40	329				
50	227				
60	119				
70	35				
80					
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期値)

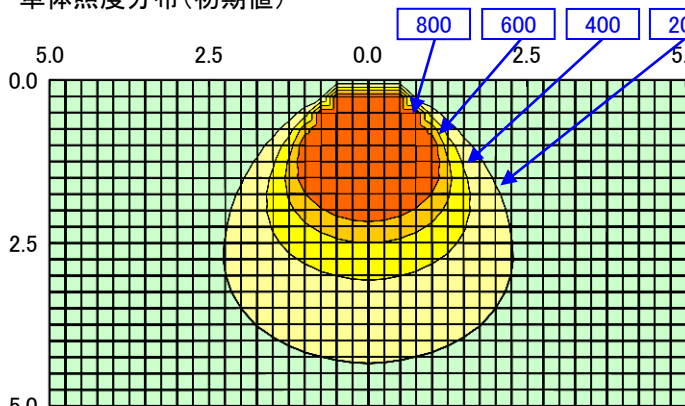

800 600 400 200

5.0 2.5 0.0 2.5 5.0


0.0 2.5 5.0

A← 水平距離(m) →B

(E) 照度

- 0-200
- 200-400
- 400-600
- 600-800
- 800-1000

配光曲線
(cd/1000 lm)

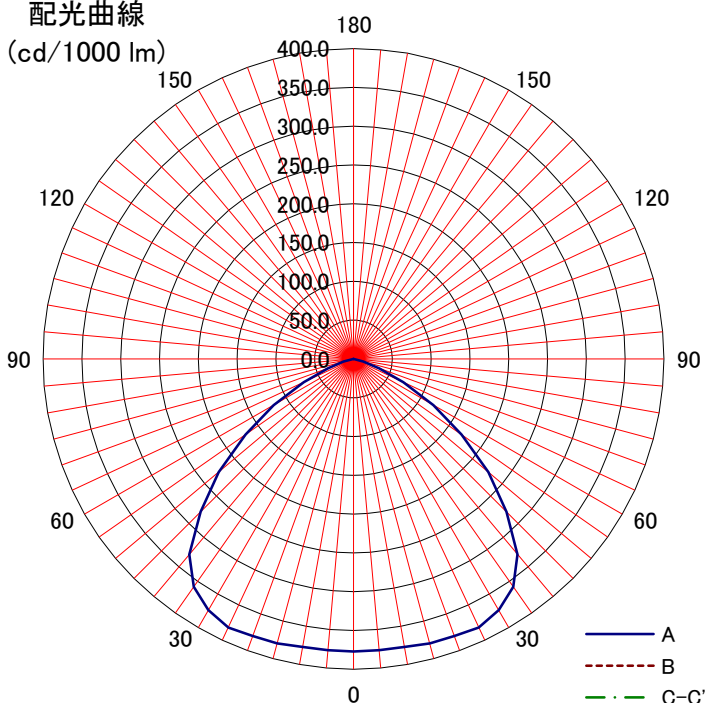

180 150 150 120 120 90 90 60 60 30 30 0

400.0 350.0 300.0 250.0 200.0 150.0 100.0 50.0 0.0

A B C-C'