
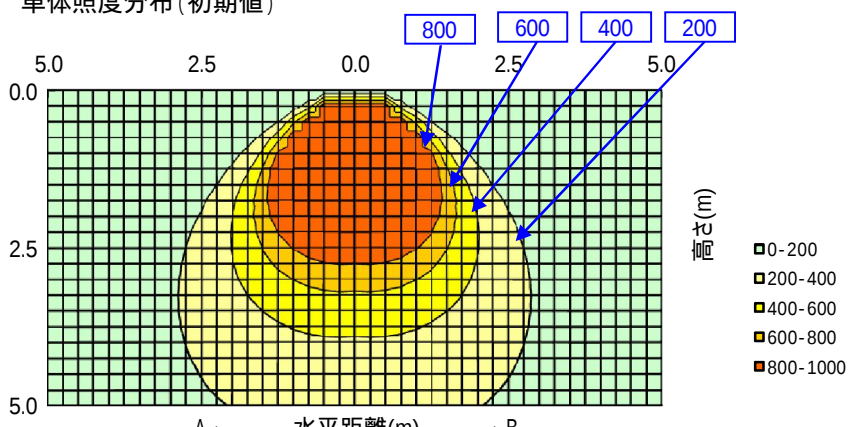
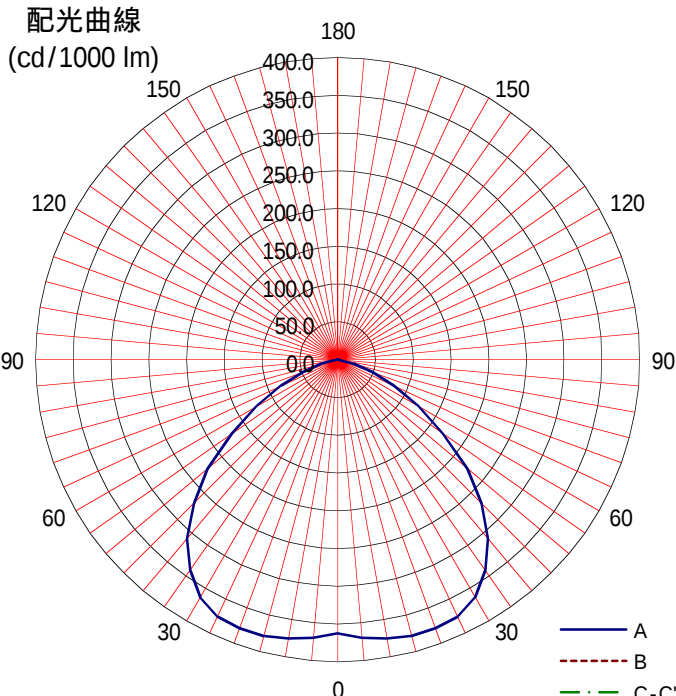


日立照明器具 照明特性

名称: 高天井用LEDラング (アームタイプ)	反射率	天井	80%			70%				50%			30%			0%																																																																																																																								
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																								
		床	10%														0%																																																																																																																							
形式: WSBME1601MN	室指数	固有照明率 S/H=1.0																																																																																																																																						
<備考>	0.6	0.62	0.51	0.43	0.61	0.50	0.43	0.38	0.49	0.43	0.38	0.48	0.42	0.38	0.36																																																																																																																									
	0.8	0.72	0.62	0.55	0.71	0.61	0.54	0.49	0.60	0.54	0.49	0.58	0.53	0.49	0.47																																																																																																																									
姿図 	1	0.79	0.69	0.62	0.77	0.68	0.62	0.57	0.67	0.61	0.57	0.66	0.60	0.56	0.55																																																																																																																									
	1.25	0.84	0.76	0.70	0.83	0.75	0.69	0.65	0.73	0.68	0.64	0.72	0.67	0.64	0.62																																																																																																																									
	1.5	0.88	0.81	0.75	0.87	0.80	0.75	0.71	0.78	0.74	0.70	0.77	0.73	0.69	0.67																																																																																																																									
	2	0.94	0.88	0.83	0.92	0.87	0.82	0.78	0.85	0.81	0.78	0.83	0.80	0.77	0.75																																																																																																																									
	2.5	0.97	0.91	0.87	0.95	0.90	0.87	0.83	0.89	0.85	0.82	0.87	0.84	0.81	0.79																																																																																																																									
	3	0.98	0.94	0.90	0.97	0.93	0.89	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.82																																																																																																																									
	4	1.01	0.97	0.94	1.00	0.96	0.93	0.91	0.94	0.92	0.90	0.92	0.90	0.88	0.86																																																																																																																									
光源形式 -	5	1.03	1.00	0.97	1.01	0.99	0.96	0.94	0.97	0.95	0.93	0.95	0.93	0.91	0.89																																																																																																																									
器具光束	7	1.05	1.03	1.01	1.03	1.02	1.00	0.98	0.99	0.98	0.97	0.97	0.96	0.95	0.92																																																																																																																									
16,800 lm	10	1.06	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.98	0.95																																																																																																																									
器具効率 Ft= 100%		単体照度分布 (初期値) 																																																																																																																																						
上方光束 Fu= 0%																																																																																																																																								
下方光束 Fd= 100%																																																																																																																																								
最大取付間隔		配光曲線 (cd/1000 lm) 																																																																																																																																						
A-A 1.44 H																																																																																																																																								
B-B H																																																																																																																																								
保守率	良	0.81	<table><tr><td></td><td>A-0</td><td>B-B</td><td>C-0</td><td>A'-0</td><td>C'-0</td></tr><tr><td>0</td><td>363</td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td>375</td><td></td><td></td><td></td><td></td></tr><tr><td>20</td><td>379</td><td></td><td></td><td></td><td></td></tr><tr><td>30</td><td>364</td><td></td><td></td><td></td><td></td></tr><tr><td>40</td><td>310</td><td></td><td></td><td></td><td></td></tr><tr><td>50</td><td>224</td><td></td><td></td><td></td><td></td></tr><tr><td>60</td><td>123</td><td></td><td></td><td></td><td></td></tr><tr><td>70</td><td>49</td><td></td><td></td><td></td><td></td></tr><tr><td>80</td><td>6</td><td></td><td></td><td></td><td></td></tr><tr><td>90</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>100</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>110</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></table>															A-0	B-B	C-0	A'-0	C'-0	0	363					10	375					20	379					30	364					40	310					50	224					60	123					70	49					80	6					90						100						110						120						130						140						150						160						170						180					
	A-0	B-B															C-0	A'-0	C'-0																																																																																																																					
0	363																																																																																																																																							
10	375																																																																																																																																							
20	379																																																																																																																																							
30	364																																																																																																																																							
40	310																																																																																																																																							
50	224																																																																																																																																							
60	123																																																																																																																																							
70	49																																																																																																																																							
80	6																																																																																																																																							
90																																																																																																																																								
100																																																																																																																																								
110																																																																																																																																								
120																																																																																																																																								
130																																																																																																																																								
140																																																																																																																																								
150																																																																																																																																								
160																																																																																																																																								
170																																																																																																																																								
180																																																																																																																																								
	中	0.79																																																																																																																																						
	否	0.75																																																																																																																																						
光度 (cd/1000 lm)																																																																																																																																								