
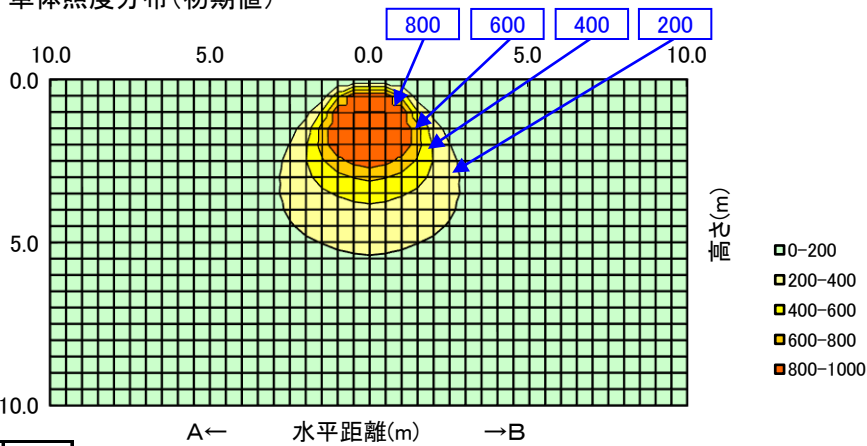
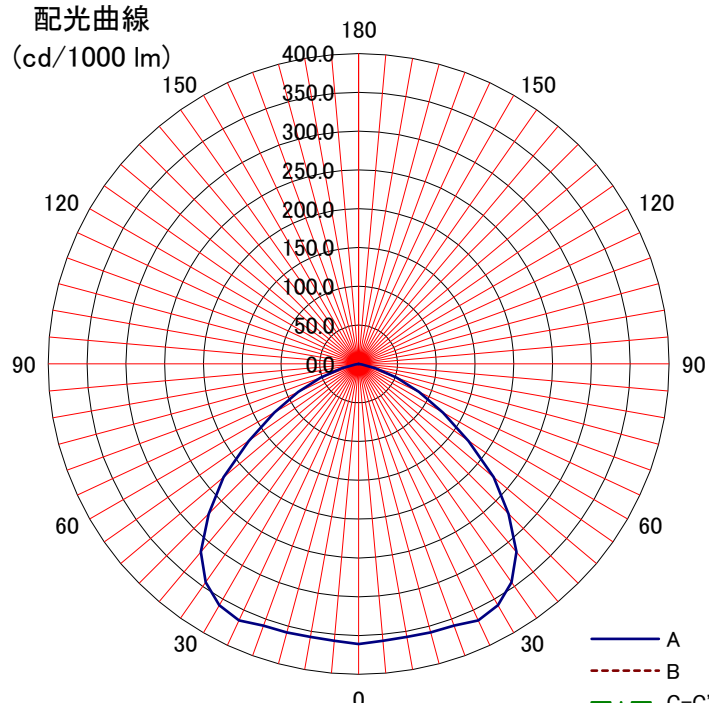


日立照明器具 照明特性																
名称: 高天井用LEDランプ (アームタイプ)	反 射 率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
形式: WSBME16AMNC1	室指数	固有照明率 S/H=1.0														
<備考>	0.6	0.61	0.50	0.42	0.60	0.49	0.42	0.37	0.48	0.42	0.37	0.47	0.41	0.37	0.35	
	0.8	0.71	0.61	0.54	0.70	0.60	0.53	0.48	0.59	0.53	0.48	0.58	0.52	0.48	0.46	
	1	0.78	0.68	0.62	0.76	0.68	0.61	0.56	0.66	0.60	0.56	0.65	0.60	0.56	0.54	
	1.25	0.84	0.75	0.69	0.82	0.74	0.69	0.64	0.73	0.68	0.63	0.71	0.67	0.63	0.61	
	1.5	0.88	0.81	0.75	0.86	0.80	0.74	0.70	0.78	0.73	0.69	0.76	0.72	0.69	0.67	
	2	0.93	0.87	0.82	0.92	0.86	0.82	0.78	0.84	0.80	0.77	0.83	0.79	0.76	0.74	
	2.5	0.96	0.91	0.87	0.95	0.90	0.86	0.83	0.88	0.85	0.82	0.86	0.83	0.81	0.78	
	3	0.98	0.94	0.90	0.97	0.93	0.89	0.86	0.91	0.87	0.85	0.89	0.86	0.84	0.81	
光源形式	4	1.01	0.97	0.94	0.99	0.96	0.93	0.91	0.94	0.91	0.89	0.92	0.90	0.88	0.85	
-	5	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.96	0.94	0.92	0.94	0.93	0.91	0.88	
器具光束	7	1.04	1.02	1.01	1.03	1.01	1.00	0.98	0.99	0.98	0.96	0.97	0.96	0.95	0.92	
16,100 lm	10	1.06	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.00	0.99	0.99	0.98	0.95	
器具効率 Ft= 100%		単体照度分布(初期値) 														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔		配光曲線 (cd/1000 lm) 														
A-A 1.46 H																
B-B H																
保守率	良 0.81															
	中 0.79															
	否 0.75															
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	361															
10	357															
20	359															
30	359															
40	316															
50	227															
60	126															
70	52															
80	4															
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																