
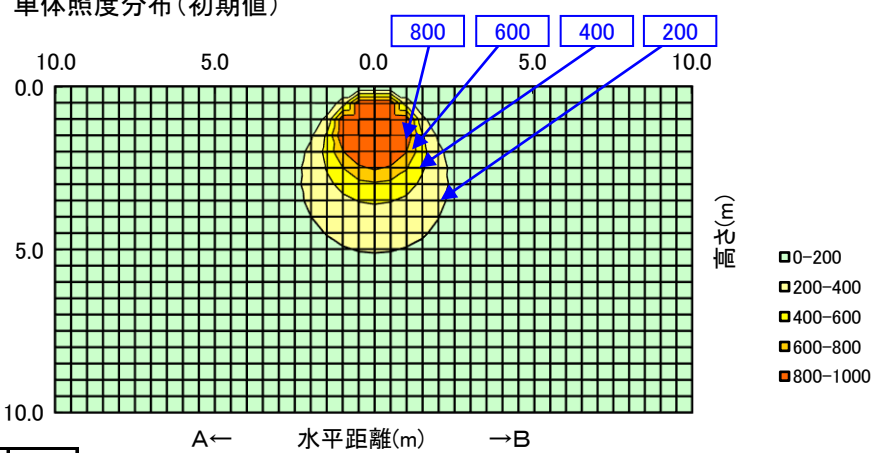
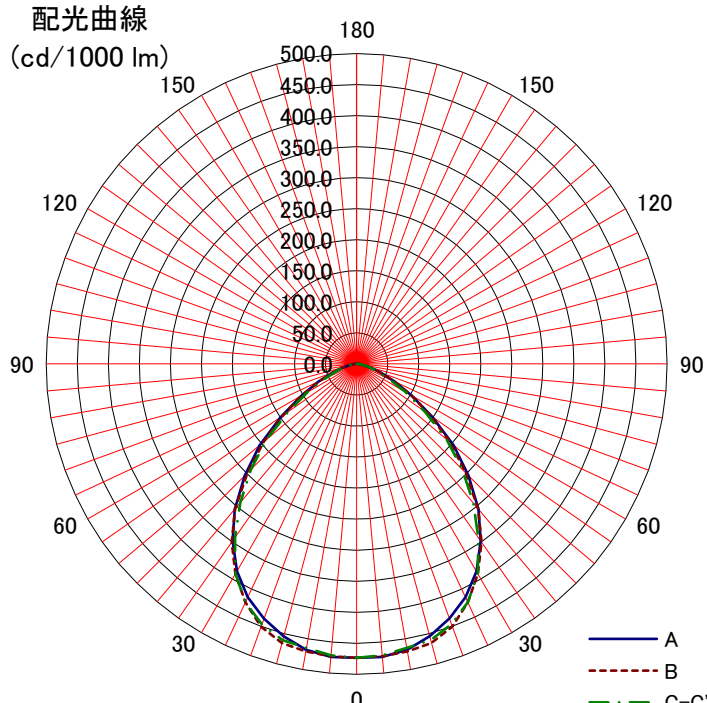


日立照明器具 照明特性

名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: WSMTE11AMN-J14B	室指数	固有照明率 S/H=1.0														
〈備考〉	0.6	0.65	0.54	0.48	0.64	0.54	0.48	0.43	0.53	0.47	0.43	0.52	0.47	0.43	0.41	
	0.8	0.74	0.65	0.58	0.73	0.64	0.58	0.54	0.63	0.58	0.53	0.62	0.57	0.53	0.51	
姿図 	1	0.81	0.72	0.66	0.79	0.71	0.65	0.61	0.70	0.65	0.61	0.68	0.64	0.60	0.58	
	1.25	0.86	0.78	0.72	0.85	0.77	0.72	0.68	0.76	0.71	0.67	0.74	0.70	0.67	0.65	
	1.5	0.90	0.83	0.78	0.88	0.82	0.77	0.73	0.80	0.76	0.72	0.79	0.75	0.72	0.70	
	2	0.94	0.89	0.84	0.93	0.88	0.84	0.80	0.86	0.83	0.79	0.84	0.81	0.79	0.77	
	2.5	0.97	0.92	0.88	0.96	0.91	0.88	0.85	0.89	0.86	0.84	0.88	0.85	0.83	0.80	
	3	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.92	0.89	0.86	0.90	0.87	0.85	0.83	
	4	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.92	0.90	0.93	0.91	0.89	0.86	
光源形式 -	5	1.03	1.00	0.98	1.01	0.99	0.97	0.95	0.97	0.95	0.93	0.95	0.93	0.92	0.89	
器具光束 11,000 lm	7	1.05	1.03	1.01	1.03	1.02	1.00	0.99	1.00	0.98	0.97	0.98	0.96	0.95	0.93	
	10	1.06	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.98	0.96	
器具効率 Ft= 100%		単体照度分布(初期値) 														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔																
A-A 1.22 H																
B-B 1.22 H																
保守率	良	0.83	配光曲線 (cd/1000 lm) 													
	中	0.81														
	否	0.76														
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	473	473	473													
10	468	470	465													
20	436	451	447													
30	386	391	390													
40	306	305	292													
50	204	196	190													
60	103	102	91													
70	41	41	36													
80	13	13	13													
90	1	1	1													
100																
110																
120																
130																
140																
150																
160																
170																
180																