

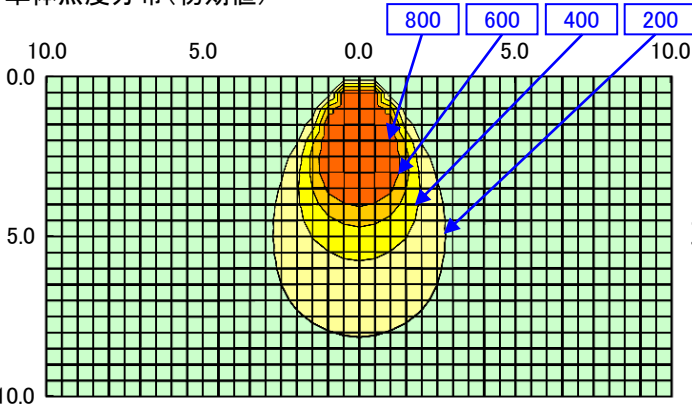


日立照明器具 照明特性

名称: 高天井用LED器具	反 射 率	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%													0%	
形式: WSMTE1403NN-J14B	室指数	固有照明率 S/H=1.0															
<備考> 水銀ランプ 400クラス ビームの開き角: 60° 姿図 		0.6	0.79	0.72	0.68	0.79	0.72	0.68	0.65	0.71	0.67	0.64	0.71	0.67	0.64	0.63	
		0.8	0.87	0.81	0.76	0.86	0.80	0.76	0.73	0.79	0.76	0.73	0.78	0.75	0.73	0.71	
	1	0.91	0.86	0.82	0.90	0.85	0.81	0.79	0.84	0.81	0.78	0.83	0.80	0.78	0.76		
	1.25	0.95	0.90	0.86	0.94	0.89	0.86	0.83	0.88	0.85	0.83	0.87	0.84	0.82	0.81		
	1.5	0.97	0.93	0.90	0.96	0.92	0.89	0.87	0.91	0.88	0.86	0.90	0.88	0.86	0.84		
	2	1.00	0.97	0.94	0.99	0.96	0.94	0.91	0.95	0.93	0.91	0.93	0.91	0.90	0.88		
	2.5	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.97	0.95	0.93	0.95	0.93	0.92	0.90		
	3	1.03	1.00	0.98	1.02	0.99	0.97	0.96	0.98	0.96	0.94	0.96	0.95	0.93	0.91		
	光源形式	4	1.04	1.02	1.00	1.03	1.01	1.00	0.98	0.99	0.98	0.97	0.98	0.96	0.95	0.93	
	LED	5	1.05	1.04	1.02	1.04	1.03	1.01	1.00	1.01	0.99	0.98	0.99	0.98	0.97	0.95	
器具光束	7	1.07	1.05	1.04	1.05	1.04	1.04	1.03	1.02	1.02	1.01	1.01	1.00	0.99	0.97		
14,200 lm	10	1.08	1.07	1.06	1.07	1.06	1.05	1.05	1.04	1.03	1.03	1.02	1.02	1.01	0.99		
器具効率 Ft= 100%		単体照度分布 (初期値)  A← 水平距離(m) →B															
上方光束 Fu= 0.0%																	
下方光束 Fd= 100.0%																	
最大取付間隔																	
A-A 0.94 H																	
B-B H																	
保守率	良																0.81
	中																0.79
	否																0.75
光度 (cd/1000 lm)																	
	A-0	B-B	C-0	A'-0	C'-0												
0	933																
10	889																
20	760																
30	500																
40	245																
50	70																
60	17																
70	5																
80	2																
90																	
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	

配光曲線	
(cd/1000 lm)	
	
A	—
B	- - -
C-C'	- · -

配光曲線
(cd/1000 lm)

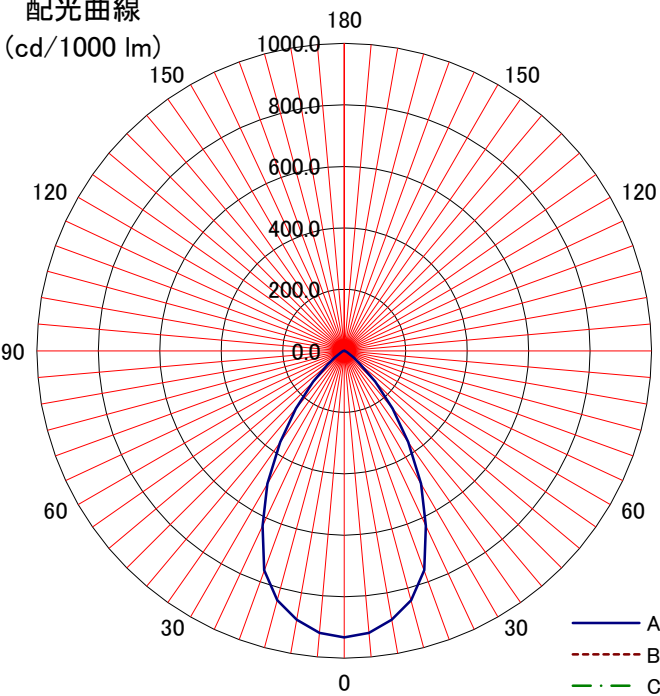