
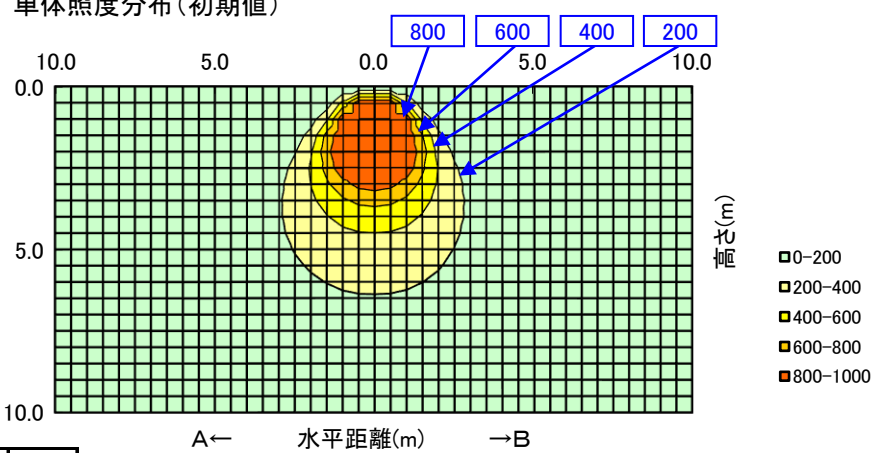
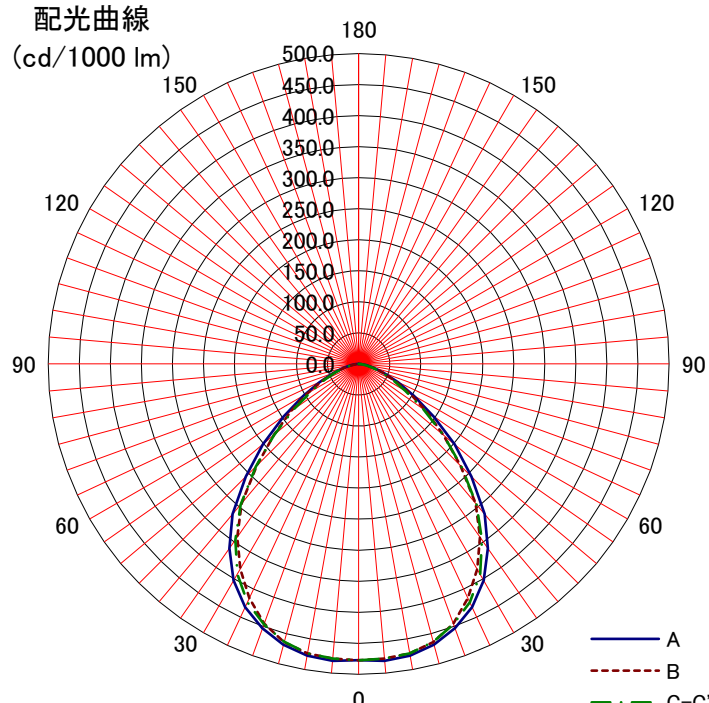


日立照明器具 照明特性

名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: WSMTE17AMN-J14A	室指数	固有照明率 S/H=1.0														
<備考> 配光角(広角)	0.6	0.65	0.54	0.48	0.64	0.54	0.48	0.43	0.53	0.47	0.43	0.52	0.47	0.43	0.41	
	0.8	0.74	0.65	0.58	0.73	0.64	0.58	0.54	0.63	0.58	0.53	0.62	0.57	0.53	0.51	
姿図 	1	0.80	0.72	0.66	0.79	0.71	0.65	0.61	0.70	0.64	0.60	0.68	0.64	0.60	0.58	
	1.25	0.85	0.78	0.72	0.84	0.77	0.72	0.68	0.76	0.71	0.67	0.74	0.70	0.67	0.65	
	1.5	0.89	0.83	0.77	0.88	0.82	0.77	0.73	0.80	0.76	0.72	0.78	0.75	0.72	0.70	
	2	0.94	0.88	0.84	0.93	0.88	0.83	0.80	0.86	0.82	0.79	0.84	0.81	0.78	0.76	
	2.5	0.96	0.92	0.88	0.95	0.91	0.87	0.84	0.89	0.86	0.83	0.87	0.85	0.82	0.80	
	3	0.98	0.94	0.91	0.97	0.93	0.90	0.87	0.91	0.88	0.86	0.89	0.87	0.85	0.82	
光源形式 -	4	1.00	0.97	0.94	0.99	0.96	0.93	0.91	0.94	0.92	0.90	0.92	0.90	0.89	0.86	
	5	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.96	0.94	0.93	0.94	0.93	0.91	0.89	
器具光束 17,000 lm	7	1.04	1.02	1.00	1.03	1.01	0.99	0.98	0.99	0.98	0.96	0.97	0.96	0.95	0.92	
	10	1.05	1.04	1.03	1.04	1.03	1.02	1.01	1.01	1.00	0.99	0.99	0.98	0.98	0.95	
器具効率 Ft= 100%		単体照度分布(初期値) 														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔																
A-A 1.26 H																
B-B 1.20 H																
保守率	良	0.81														
	中	0.79														
	否	0.75														
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm) 														
	A-0 B-B C-0 A'-0 C'-0															
0	477 477 477															
10	477 474 474															
20	453 445 446															
30	403 382 391															
40	316 293 296															
50	202 178 178															
60	103 95 87															
70	44 41 39															
80	12 11 11															
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																