
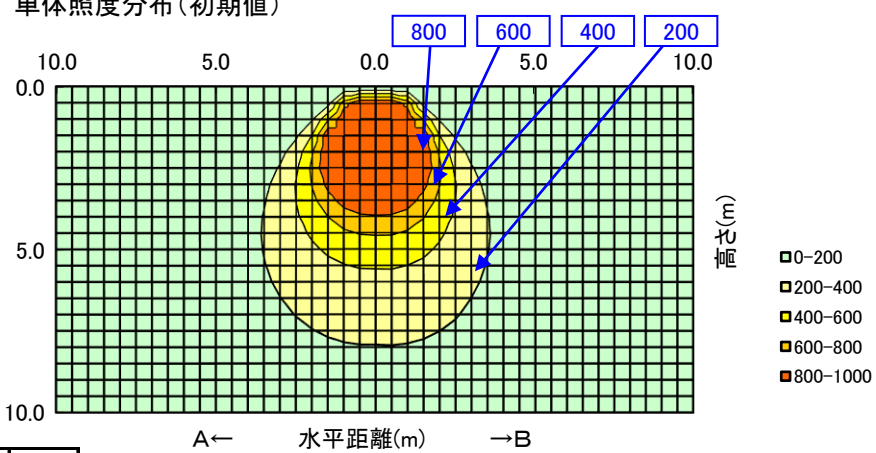
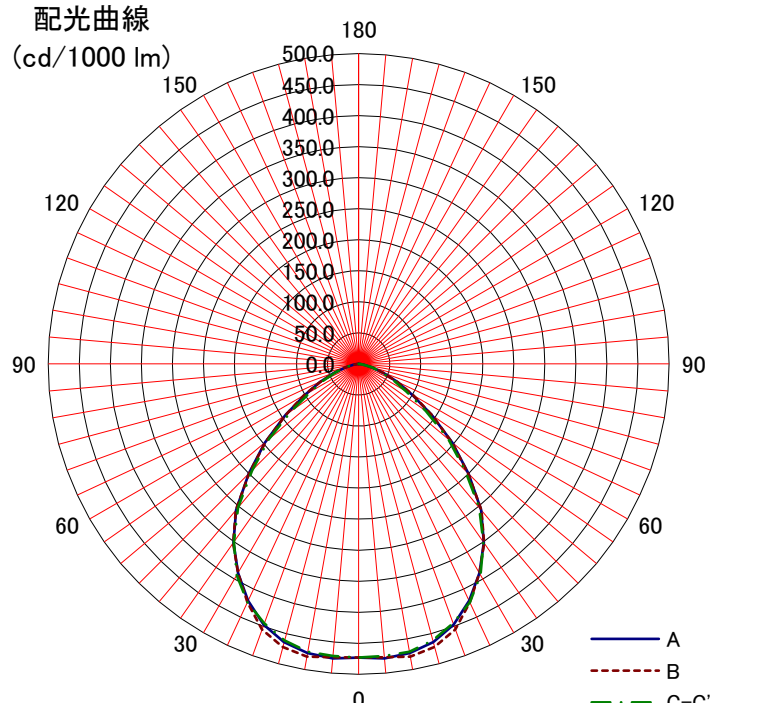


日立照明器具 照明特性																	
名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%													0%	
形式: WSMTE28BMN-J24A	室指数	固有照明率 S/H=1.0															
<備考> 姿図 	0.6	0.65	0.55	0.48	0.64	0.54	0.48	0.43	0.53	0.47	0.43	0.52	0.47	0.43	0.41		
	0.8	0.75	0.65	0.59	0.74	0.65	0.59	0.54	0.63	0.58	0.54	0.62	0.57	0.53	0.52		
	1	0.81	0.72	0.66	0.80	0.72	0.66	0.61	0.70	0.65	0.61	0.69	0.64	0.61	0.59		
	1.25	0.86	0.79	0.73	0.85	0.78	0.72	0.68	0.76	0.71	0.68	0.75	0.71	0.67	0.65		
	1.5	0.90	0.83	0.78	0.89	0.82	0.78	0.74	0.81	0.76	0.73	0.79	0.75	0.72	0.70		
	2	0.95	0.89	0.85	0.93	0.88	0.84	0.81	0.87	0.83	0.80	0.85	0.82	0.79	0.77		
	2.5	0.97	0.93	0.89	0.96	0.92	0.88	0.85	0.90	0.87	0.84	0.88	0.85	0.83	0.81		
	3	0.99	0.95	0.92	0.98	0.94	0.91	0.88	0.92	0.89	0.87	0.90	0.88	0.86	0.83		
光源形式	4	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.91	0.93	0.91	0.89	0.87		
	5	1.03	1.00	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.94	0.95	0.94	0.92	0.90		
器具光束	7	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.97	0.98	0.97	0.96	0.93		
	26,500 lm	10	1.07	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.01	1.00	0.99	0.96		
器具効率 Ft= 100%		単体照度分布(初期値) 															
上方光束 Fu= 0%																	
下方光束 Fd= 100%																	
最大取付間隔																	
保守率																	
光度 (cd/1000 lm)																	
	A-0	B-B	C-0	A'-0	C'-0	配光曲線 (cd/1000 lm) 											
0	473	473	473														
10	473	479	471														
20	447	455	445														
30	389	389	393														
40	307	308	302														
50	197	196	188														
60	100	102	89														
70	43	43	40														
80	9	10	10														
90																	
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	