
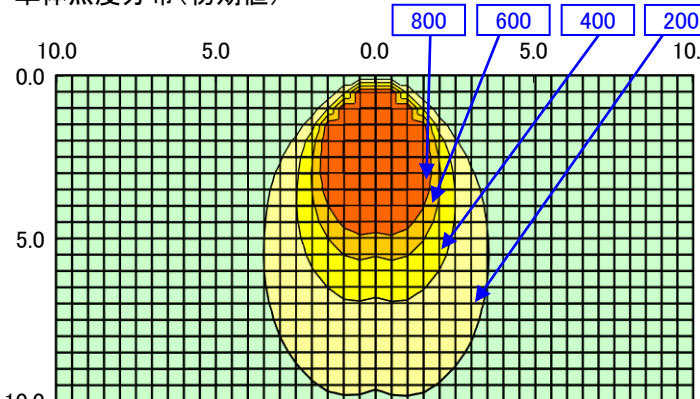
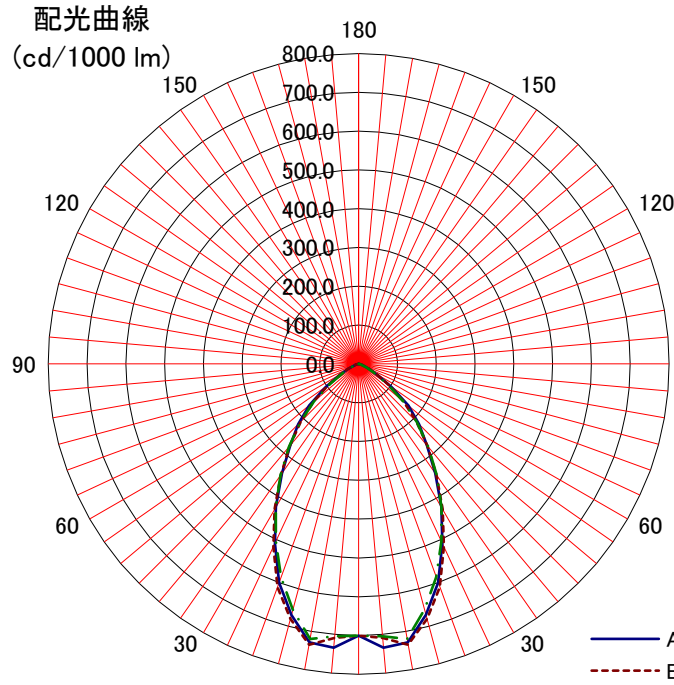


日立照明器具 照明特性

名称: 高天井用LED器具	天井 反射率	80%			70%				50%			30%			0%																																																																																																																									
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																								
形式: WSMTE28BNN-J24A	床	10%																																																																																																																																						
		室指数	固有照明率 S/H=1.0																																																																																																																																					
<備考>	0.6	0.72	0.63	0.58	0.71	0.63	0.58	0.54	0.62	0.57	0.54	0.61	0.57	0.54	0.52																																																																																																																									
	0.8	0.81	0.73	0.68	0.80	0.73	0.68	0.64	0.71	0.67	0.64	0.71	0.66	0.63	0.62																																																																																																																									
姿図 	1	0.86	0.79	0.74	0.85	0.79	0.74	0.70	0.77	0.73	0.70	0.76	0.73	0.70	0.68																																																																																																																									
	1.25	0.90	0.84	0.80	0.89	0.84	0.79	0.76	0.82	0.79	0.76	0.81	0.78	0.75	0.73																																																																																																																									
	1.5	0.94	0.88	0.84	0.92	0.88	0.84	0.81	0.86	0.83	0.80	0.85	0.82	0.79	0.78																																																																																																																									
	2	0.97	0.93	0.90	0.96	0.92	0.89	0.86	0.91	0.88	0.86	0.89	0.87	0.85	0.83																																																																																																																									
	2.5	0.99	0.96	0.93	0.98	0.95	0.92	0.90	0.93	0.91	0.89	0.92	0.90	0.88	0.86																																																																																																																									
	3	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.91	0.93	0.91	0.90	0.87																																																																																																																									
光源形式	4	1.02	1.00	0.98	1.01	0.99	0.97	0.95	0.97	0.95	0.94	0.95	0.94	0.92	0.90																																																																																																																									
	5	1.04	1.02	1.00	1.02	1.01	0.99	0.97	0.99	0.97	0.96	0.97	0.96	0.94	0.92																																																																																																																									
器具光束 26,500 lm	7	1.05	1.04	1.03	1.04	1.03	1.02	1.01	1.01	1.00	0.99	0.99	0.98	0.97	0.95																																																																																																																									
	10	1.07	1.06	1.05	1.05	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.00	1.00	0.97																																																																																																																									
器具効率 Ft= 99%		単体照度分布 (初期値) 																																																																																																																																						
上方光束 Fu= 0%																																																																																																																																								
下方光束 Fd= 99%																																																																																																																																								
最大取付間隔		配光曲線 (cd/1000 lm) 																																																																																																																																						
A-A 1.00 H																																																																																																																																								
B-B 1.02 H																																																																																																																																								
保守率																																																																																																																																								
良	0.83	<table><tr><th>光度 (cd/1000 lm)</th><th>A-0</th><th>B-B</th><th>C-0</th><th>A'-0</th><th>C'-0</th></tr><tr><td>0</td><td>700</td><td>700</td><td>700</td><td></td><td></td></tr><tr><td>10</td><td>729</td><td>735</td><td>720</td><td></td><td></td></tr><tr><td>20</td><td>600</td><td>612</td><td>585</td><td></td><td></td></tr><tr><td>30</td><td>426</td><td>433</td><td>427</td><td></td><td></td></tr><tr><td>40</td><td>273</td><td>276</td><td>280</td><td></td><td></td></tr><tr><td>50</td><td>167</td><td>152</td><td>150</td><td></td><td></td></tr><tr><td>60</td><td>57</td><td>55</td><td>45</td><td></td><td></td></tr><tr><td>70</td><td>12</td><td>12</td><td>7</td><td></td><td></td></tr><tr><td>80</td><td>3</td><td>3</td><td>3</td><td></td><td></td></tr><tr><td>90</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>100</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>110</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></table>															光度 (cd/1000 lm)	A-0	B-B	C-0	A'-0	C'-0	0	700	700	700			10	729	735	720			20	600	612	585			30	426	433	427			40	273	276	280			50	167	152	150			60	57	55	45			70	12	12	7			80	3	3	3			90						100						110						120						130						140						150						160						170						180					
光度 (cd/1000 lm)	A-0																B-B	C-0	A'-0	C'-0																																																																																																																				
0	700																700	700																																																																																																																						
10	729																735	720																																																																																																																						
20	600																612	585																																																																																																																						
30	426																433	427																																																																																																																						
40	273	276	280																																																																																																																																					
50	167	152	150																																																																																																																																					
60	57	55	45																																																																																																																																					
70	12	12	7																																																																																																																																					
80	3	3	3																																																																																																																																					
90																																																																																																																																								
100																																																																																																																																								
110																																																																																																																																								
120																																																																																																																																								
130																																																																																																																																								
140																																																																																																																																								
150																																																																																																																																								
160																																																																																																																																								
170																																																																																																																																								
180																																																																																																																																								
中	0.81																																																																																																																																							
否	0.76																																																																																																																																							