
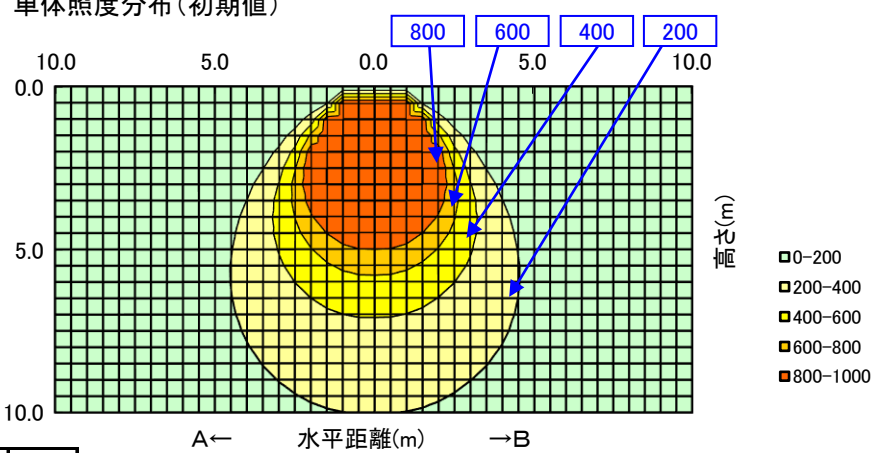
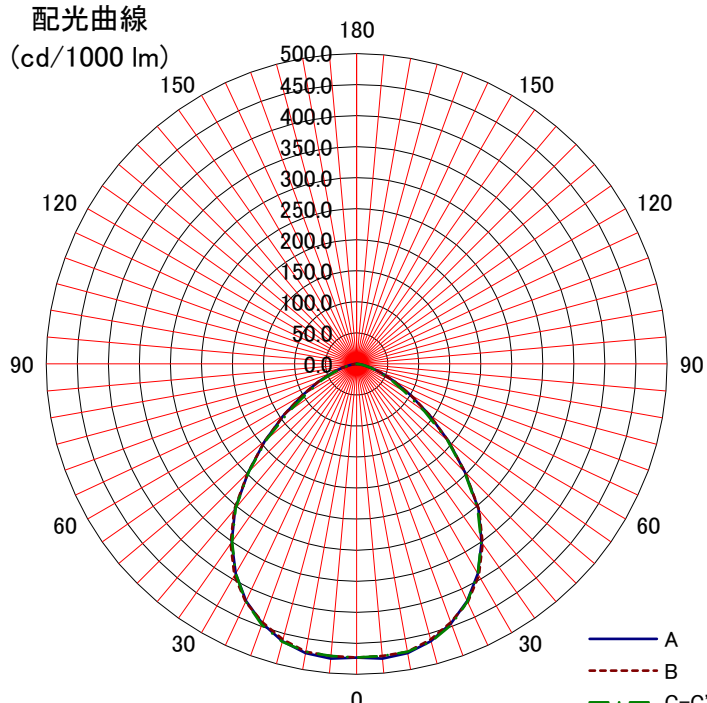


日立照明器具 照明特性

名称: 高天井用LED器具		反射率	天井 壁 床	80%			70%				50%			30%			0%
				70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
形式: WSMTE44BMN-J24A		室指数	固有照明率 S/H=1.0														
			10%														
<備考>		0.6	0.65	0.55	0.48	0.64	0.54	0.48	0.43	0.53	0.47	0.43	0.52	0.47	0.43	0.41	
		0.8	0.75	0.65	0.59	0.73	0.65	0.58	0.54	0.63	0.58	0.54	0.62	0.57	0.53	0.52	
姿図 		1	0.81	0.72	0.66	0.79	0.71	0.66	0.61	0.70	0.65	0.61	0.69	0.64	0.60	0.59	
		1.25	0.86	0.78	0.73	0.85	0.78	0.72	0.68	0.76	0.71	0.67	0.75	0.70	0.67	0.65	
		1.5	0.90	0.83	0.78	0.88	0.82	0.77	0.73	0.81	0.76	0.73	0.79	0.75	0.72	0.70	
		2	0.95	0.89	0.85	0.93	0.88	0.84	0.81	0.86	0.83	0.80	0.85	0.82	0.79	0.77	
		2.5	0.97	0.93	0.89	0.96	0.92	0.88	0.85	0.90	0.87	0.84	0.88	0.85	0.83	0.81	
		3	0.99	0.95	0.91	0.98	0.94	0.91	0.88	0.92	0.89	0.87	0.90	0.88	0.85	0.83	
光源形式		4	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.90	0.93	0.91	0.89	0.87	
器具光束 42,500 lm		5	1.03	1.00	0.98	1.01	0.99	0.97	0.95	0.97	0.95	0.93	0.95	0.93	0.92	0.89	
		7	1.05	1.03	1.01	1.04	1.02	1.00	0.99	1.00	0.98	0.97	0.98	0.97	0.96	0.93	
		10	1.06	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.99	0.96	
器具効率 Ft= 100%		単体照度分布(初期値) 															
上方光束 Fu= 0%																	
下方光束 Fd= 100%																	
最大取付間隔																	
A-A		1.22	H														
B-B		1.24	H														
保守率	良	0.83															
	中	0.81															
	否	0.76															
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm) 															
	A-0	B-B	C-0	A'-0	C'-0												
0	473	473	473														
10	473	471	471														
20	445	443	447														
30	390	394	390														
40	305	307	303														
50	193	193	190														
60	100	101	89														
70	42	42	39														
80	11	10	11														
90																	
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	