

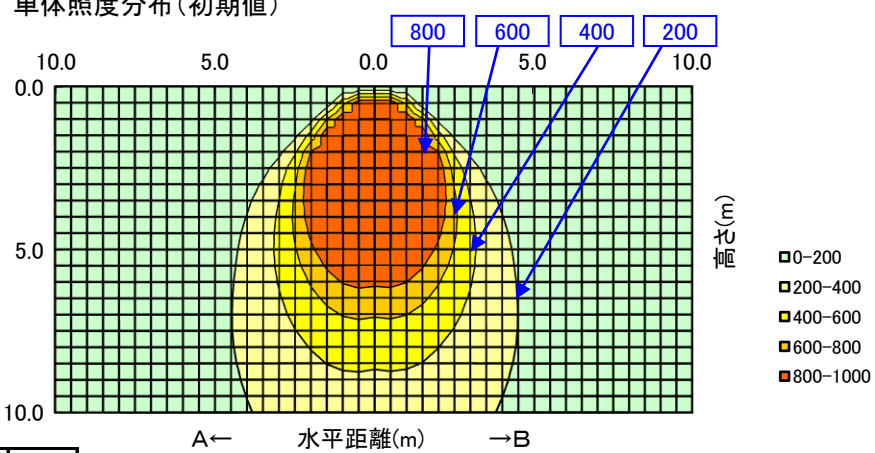


日立照明器具 照明特性

名称: 高天井用LED器具		反射率	天井 壁 床	80%			70%				50%			30%			0%																	
				70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																	
形式: WSMTE44BNN-J24A		室指数	固有照明率 S/H=1.0																															
			10%																															
<備考>		0.6	0.72	0.64	0.58	0.71	0.63	0.58	0.54	0.62	0.57	0.54	0.61	0.57	0.54	0.52																		
		0.8	0.81	0.73	0.68	0.80	0.73	0.68	0.64	0.72	0.67	0.64	0.71	0.67	0.63	0.62																		
姿図 		1	0.86	0.79	0.74	0.85	0.79	0.74	0.70	0.77	0.73	0.70	0.76	0.73	0.70	0.68																		
		1.25	0.91	0.85	0.80	0.90	0.84	0.80	0.76	0.82	0.79	0.76	0.81	0.78	0.75	0.73																		
		1.5	0.94	0.88	0.84	0.93	0.88	0.84	0.81	0.86	0.83	0.80	0.85	0.82	0.79	0.78																		
		2	0.98	0.93	0.90	0.97	0.93	0.89	0.87	0.91	0.88	0.86	0.89	0.87	0.85	0.83																		
		2.5	1.00	0.96	0.93	0.99	0.95	0.92	0.90	0.93	0.91	0.89	0.92	0.90	0.88	0.86																		
		3	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.91	0.93	0.91	0.90	0.88																		
光源形式 -		4	1.03	1.00	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.94	0.95	0.94	0.93	0.90																		
		5	1.04	1.02	1.00	1.03	1.01	0.99	0.98	0.99	0.97	0.96	0.97	0.96	0.95	0.92																		
器具光束 42,500 lm		7	1.06	1.04	1.03	1.04	1.03	1.02	1.01	1.01	1.00	0.99	0.99	0.98	0.98	0.95																		
		10	1.07	1.06	1.05	1.06	1.05	1.04	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.97																		
器具効率 Ft= 100%		単体照度分布(初期値) 																																
上方光束 Fu= 0%																																		
下方光束 Fd= 100%																																		
最大取付間隔																																		
A-A 1.00 H																																		
B-B 1.00 H																																		
保守率	良	0.83																																
	中	0.81																																
	否	0.76																																
光度 (cd/1000 lm)																																		
	A-0																B-B	C-0	A'-0	C'-0														
0	709																709	709																
10	717																709	710																
20	594																588	603																
30	431																433	434																
40	272	275	271																															
50	165	162	154																															
60	53	58	47																															
70	14	12	8																															
80	3	4	4																															
90																																		
100																																		
110																																		
120																																		
130																																		
140																																		
150																																		
160																																		
170																																		
180																																		
配光曲線 (cd/1000 lm)																																		
																		180	150	120	90	60	30	0	30	60	90	120	150	180				
																		800.0	700.0	600.0	500.0	400.0	300.0	200.0	100.0	0.0	100.0	200.0	300.0	400.0	500.0	600.0	700.0	800.0
																		A	B	C-C'														

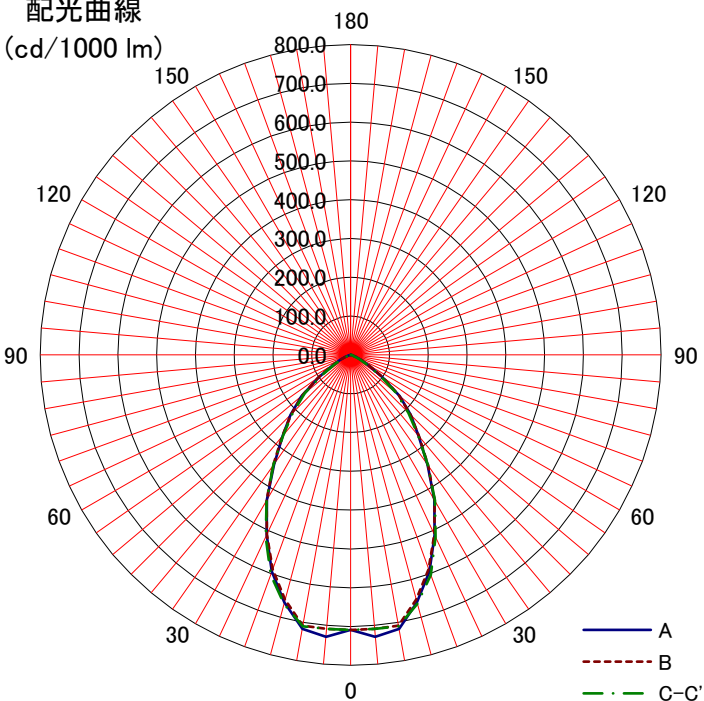