
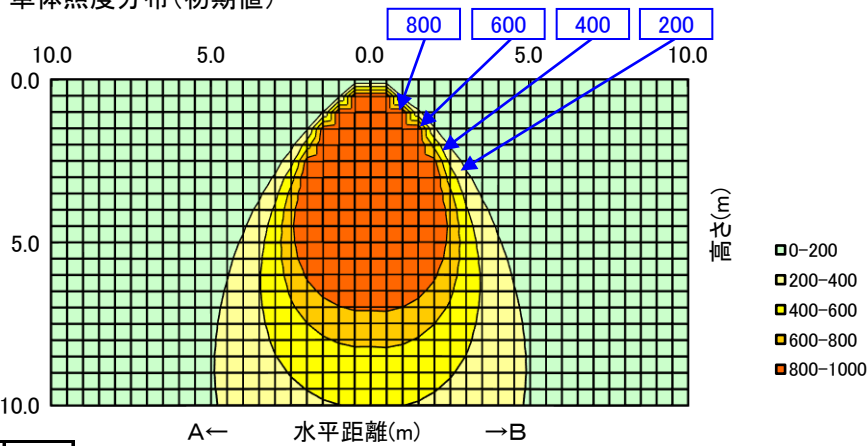
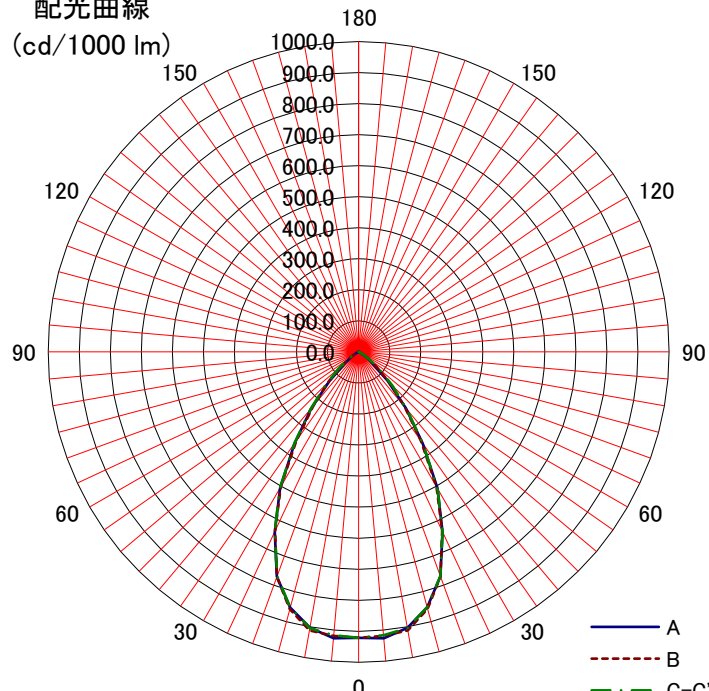


日立照明器具 照明特性

名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%																																																																																																																							
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																							
		床	10%														0%																																																																																																																						
形式: WXMTE44ANN-J24A	室指数	固有照明率 S/H=1.0																																																																																																																																					
<備考> 配光角(中角)	0.6	0.80	0.73	0.69	0.79	0.73	0.68	0.65	0.72	0.68	0.65	0.71	0.68	0.65	0.64																																																																																																																								
	0.8	0.88	0.81	0.77	0.87	0.81	0.77	0.74	0.80	0.76	0.74	0.79	0.76	0.74	0.72																																																																																																																								
姿図 	1	0.92	0.86	0.83	0.91	0.86	0.82	0.79	0.85	0.82	0.79	0.84	0.81	0.79	0.77																																																																																																																								
	1.25	0.96	0.91	0.87	0.95	0.90	0.87	0.84	0.89	0.86	0.83	0.88	0.85	0.83	0.81																																																																																																																								
	1.5	0.98	0.94	0.91	0.97	0.93	0.90	0.88	0.92	0.89	0.87	0.91	0.88	0.86	0.85																																																																																																																								
	2	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.91	0.94	0.92	0.91	0.89																																																																																																																								
	2.5	1.03	1.00	0.97	1.02	0.99	0.97	0.95	0.97	0.95	0.94	0.96	0.94	0.93	0.91																																																																																																																								
	3	1.04	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.97	0.95	0.97	0.95	0.94	0.92																																																																																																																								
	光源形式	4	1.05	1.03	1.01	1.04	1.02	1.00	0.99	1.00	0.99	0.97	0.98	0.97	0.96	0.94																																																																																																																							
器具光束 43,800 lm	5	1.06	1.04	1.03	1.05	1.03	1.02	1.01	1.01	1.00	0.99	0.99	0.99	0.98	0.95																																																																																																																								
	7	1.07	1.06	1.05	1.06	1.05	1.04	1.03	1.03	1.02	1.02	1.01	1.01	1.00	0.97																																																																																																																								
	10	1.08	1.08	1.07	1.07	1.07	1.06	1.05	1.05	1.04	1.04	1.03	1.02	1.02	0.99																																																																																																																								
器具効率 Ft= 100%		単体照度分布(初期値) 																																																																																																																																					
上方光束 Fu= 0%																																																																																																																																							
下方光束 Fd= 100%																																																																																																																																							
最大取付間隔		配光曲線 (cd/1000 lm) 																																																																																																																																					
A-A 0.96 H B-B 0.96 H																																																																																																																																							
保守率	良	0.81																																																																																																																																					
	中	0.79																																																																																																																																					
	否	0.75																																																																																																																																					
光度 (cd/1000 lm)		<table><tr><th></th><th>A-0</th><th>B-B</th><th>C-0</th><th>A'-0</th><th>C'-0</th></tr><tr><td>0</td><td>921</td><td>921</td><td>921</td><td></td><td></td></tr><tr><td>10</td><td>903</td><td>912</td><td>903</td><td></td><td></td></tr><tr><td>20</td><td>770</td><td>771</td><td>769</td><td></td><td></td></tr><tr><td>30</td><td>507</td><td>502</td><td>509</td><td></td><td></td></tr><tr><td>40</td><td>236</td><td>229</td><td>241</td><td></td><td></td></tr><tr><td>50</td><td>60</td><td>76</td><td>85</td><td></td><td></td></tr><tr><td>60</td><td>15</td><td>15</td><td>17</td><td></td><td></td></tr><tr><td>70</td><td>4</td><td>4</td><td>3</td><td></td><td></td></tr><tr><td>80</td><td>1</td><td>1</td><td>1</td><td></td><td></td></tr><tr><td>90</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>100</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>110</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></table>															A-0	B-B	C-0	A'-0	C'-0	0	921	921	921			10	903	912	903			20	770	771	769			30	507	502	509			40	236	229	241			50	60	76	85			60	15	15	17			70	4	4	3			80	1	1	1			90						100						110						120						130						140						150						160						170						180					
	A-0	B-B	C-0	A'-0	C'-0																																																																																																																																		
0	921	921	921																																																																																																																																				
10	903	912	903																																																																																																																																				
20	770	771	769																																																																																																																																				
30	507	502	509																																																																																																																																				
40	236	229	241																																																																																																																																				
50	60	76	85																																																																																																																																				
60	15	15	17																																																																																																																																				
70	4	4	3																																																																																																																																				
80	1	1	1																																																																																																																																				
90																																																																																																																																							
100																																																																																																																																							
110																																																																																																																																							
120																																																																																																																																							
130																																																																																																																																							
140																																																																																																																																							
150																																																																																																																																							
160																																																																																																																																							
170																																																																																																																																							
180																																																																																																																																							