


日立照明器具 照明特性

形式：YD503WH(BC)			反 射 率	天井	80%			70%				50%			30%			0%	
				壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
				床	10%														0%
				室指数	照明率 S/H=0.6														
姿図 			0.6	0.39	0.37	0.36	0.39	0.37	0.36	0.36	0.37	0.36	0.36	0.37	0.36	0.36	0.35		
			0.8	0.40	0.39	0.38	0.40	0.39	0.38	0.37	0.38	0.38	0.37	0.38	0.37	0.37	0.37		
			1	0.41	0.40	0.39	0.40	0.39	0.39	0.38	0.39	0.38	0.38	0.39	0.38	0.38	0.37		
			1.25	0.41	0.40	0.40	0.41	0.40	0.39	0.39	0.40	0.39	0.39	0.39	0.39	0.38	0.38		
			1.5	0.42	0.41	0.40	0.42	0.41	0.40	0.39	0.40	0.40	0.39	0.40	0.39	0.39	0.38		
			2	0.42	0.42	0.41	0.42	0.41	0.41	0.40	0.41	0.40	0.40	0.40	0.40	0.40	0.39		
			2.5	0.43	0.42	0.42	0.42	0.42	0.41	0.41	0.41	0.41	0.40	0.41	0.40	0.40	0.39		
			3	0.43	0.42	0.42	0.43	0.42	0.42	0.41	0.41	0.41	0.41	0.41	0.41	0.40	0.39		
光源			4	0.43	0.43	0.42	0.43	0.42	0.42	0.42	0.42	0.41	0.41	0.41	0.41	0.40			
品名	ミニハロゲン電球		5	0.43	0.43	0.43	0.43	0.43	0.42	0.42	0.42	0.42	0.41	0.41	0.41	0.40			
形式	JR12V50W/K5M-C		7	0.44	0.43	0.43	0.43	0.43	0.43	0.42	0.42	0.42	0.42	0.41	0.41	0.41			
光束	800 lm		10	0.44	0.44	0.43	0.43	0.43	0.43	0.43	0.42	0.42	0.42	0.42	0.41	0.40			

器具効率 Ft= 40.6%		
上方光束 Fu= 0.0%		
下方光束 Fd= 40.6%		
配光分類		
BZ-		
最大取付間隔		
A-A	0.36	H
B-B		H
保守率	良	0.84
	中	0.79
	否	0.70
光度 (cd/1000 lm)		
	A-0	B-B
0	2700	
10	1397	
20	193	
30	14	
40	2	
50	1	
60		
70		
80		
90		
100		
110		
120		
130		
140		
150		
160		
170		
180		

単体照度分布(初期)

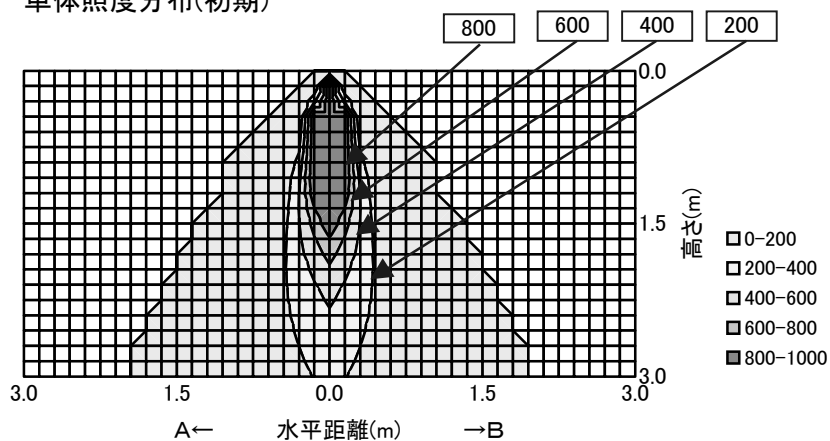

配光曲線

