
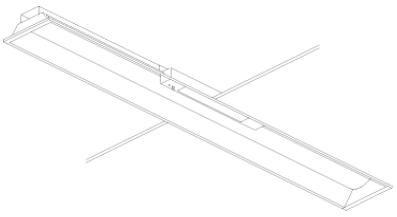
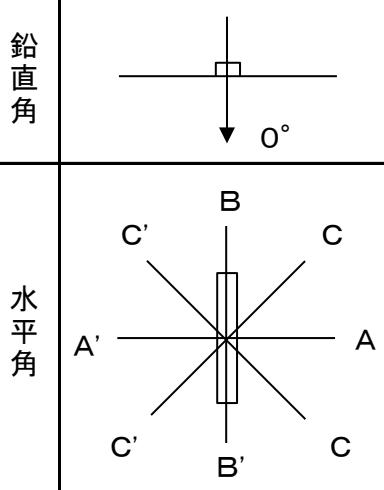


日立非常用照明器具 照明特性

| 形式 | ZTC4A3 | |
|---|------------|-----------|
| 名称 | LED非常灯 埋込形 | |
| 評定番号 | LALE-010 | |
| 備考 | | |
|  | | |
| ランプ | 定格時 | F= 715 lm |
| 光束 | 非常時 | F= 715 lm |
| 光束減衰係数 | K= 1.00 | |
| 保守率 | M= 0.88 | |
| 単体最大取付高さ | H= 8.4 m | |

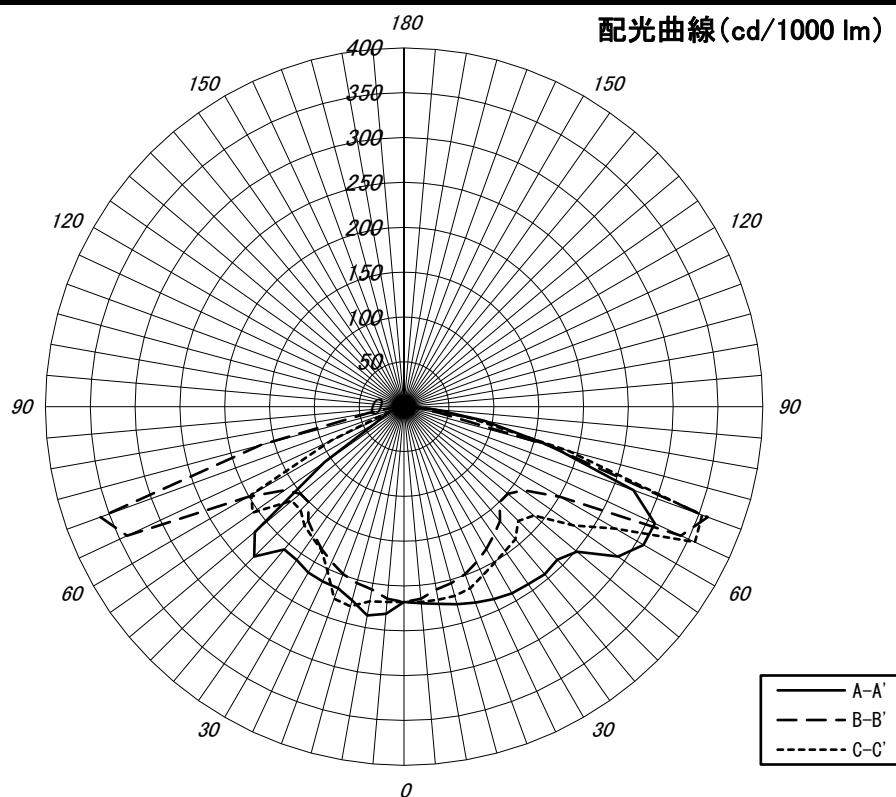

配置間隔表

(単位:m)

| 配置間隔 | 器具高さ | 2.1 | 2.4 | 2.6 | 3.0 | 4.0 | 5.0 | 6.0 | 7.0 | 8.0 | | | | | | |
|------|------|------|------|------|------|------|------|------|------|------|--|--|--|--|--|--|
| 単体配置 | A1 | 5.3 | 5.6 | 5.7 | 5.9 | 5.9 | 5.2 | 4.8 | 4.0 | 2.2 | | | | | | |
| | A1' | 3.2 | 3.5 | 3.7 | 4.1 | 4.8 | 5.0 | 4.2 | 3.4 | 2.1 | | | | | | |
| | B1 | 5.7 | 5.9 | 6.0 | 4.7 | 4.1 | 4.0 | 3.6 | 2.8 | 1.2 | | | | | | |
| | B1' | | | | | | | | | | | | | | | |
| 直線配置 | A2 | 7.1 | 7.8 | 8.3 | 9.2 | 11.1 | 12.8 | 14.2 | 14.4 | 12.4 | | | | | | |
| | B2 | 13.3 | 14.5 | 15.2 | 16.4 | 17.0 | 12.0 | 11.6 | 11.4 | 10.7 | | | | | | |
| 四角配置 | A4 | 6.1 | 6.8 | 7.2 | 7.6 | 8.7 | 9.8 | 12.9 | 14.2 | 13.6 | | | | | | |
| | B4 | 11.4 | 11.9 | 12.3 | 13.1 | 14.8 | 15.7 | 14.6 | 13.4 | 11.4 | | | | | | |
| | A0 | | | | | | | | | | | | | | | |
| | B0 | | | | | | | | | | | | | | | |