


日立照明器具 照明特性

形式：NE11201N-ZU24 <高出力タイプ> <連続調光形>		反 射 率	天井	80%			70%				50%			30%			0%	
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			床	10%														0%
			室指数	照明率 S/H=1.0														
姿図 			0.6	0.56	0.44	0.36	0.54	0.43	0.36	0.30	0.41	0.35	0.30	0.40	0.34	0.29	0.27	
			0.8	0.65	0.54	0.46	0.63	0.53	0.45	0.40	0.50	0.44	0.39	0.49	0.43	0.38	0.35	
			1	0.72	0.61	0.53	0.69	0.59	0.52	0.46	0.57	0.50	0.45	0.55	0.49	0.44	0.41	
			1.25	0.77	0.67	0.60	0.75	0.66	0.59	0.53	0.63	0.57	0.52	0.61	0.55	0.51	0.48	
			1.5	0.82	0.73	0.66	0.79	0.71	0.64	0.59	0.68	0.62	0.58	0.65	0.61	0.56	0.53	
			2	0.87	0.80	0.73	0.85	0.78	0.72	0.67	0.75	0.70	0.66	0.72	0.68	0.64	0.60	
			2.5	0.91	0.84	0.78	0.88	0.82	0.77	0.73	0.79	0.75	0.71	0.76	0.72	0.69	0.65	
			3	0.93	0.87	0.82	0.91	0.85	0.81	0.76	0.82	0.78	0.74	0.79	0.75	0.72	0.68	
光源			4	0.96	0.91	0.87	0.94	0.90	0.86	0.82	0.86	0.83	0.80	0.83	0.80	0.77	0.73	
品名	LED		5	0.98	0.94	0.91	0.96	0.92	0.89	0.86	0.89	0.86	0.83	0.85	0.83	0.81	0.76	
形式	-		7	1.01	0.98	0.95	0.99	0.96	0.93	0.91	0.92	0.90	0.88	0.89	0.87	0.85	0.81	
器具光束	14,700 lm		10	1.03	1.01	0.99	1.01	0.99	0.97	0.95	0.95	0.94	0.92	0.92	0.90	0.89	0.85	

器具効率 Ft=	100.0%	
上方光束 Fu=	7.0%	
下方光束 Fd=	93.0%	
配光分類	BZ-	
最大取付間隔		
A-A	1.30	H
B-B	1.28	H
保守率	良	0.81
	中	0.77
	否	0.68

単体照度分布(初期)

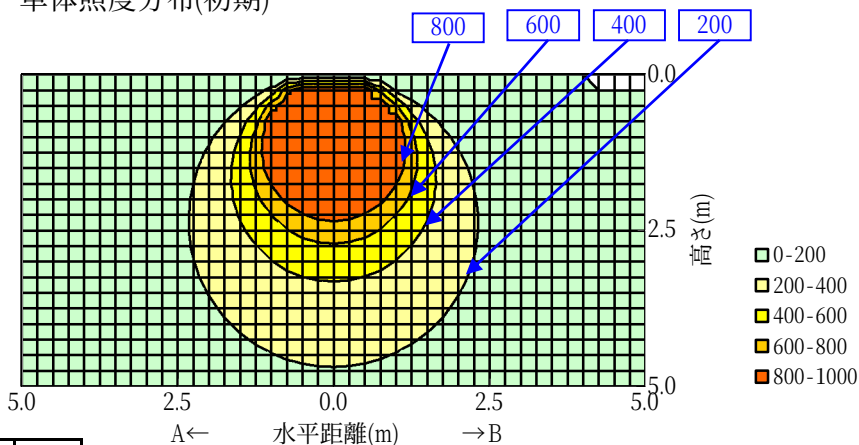

光度 (cd/1000 lm)	A-0	B-B	C-0	A'-0	C'-0
0	298	298	298		
10	295	294	295		
20	281	280	281		
30	258	256	258		
40	227	225	227		
50	189	184	187		
60	149	137	142		
70	109	84	98		
80	64	32	54		
90	42	2	28		
100	26	3	15		
110	16	4	9		
120	12	5	9		
130	11	7	9		
140	11	7	9		
150	10	8	8		
160	10	9	8		
170	8	9	8		
180					

配光曲線

